

成形材料試験成績表

平成21年5月度



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020


成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	962
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.4
引張降伏強さ	JIS K 7113	MPa	19.61 以上	28.00
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビッカート軟化点	JIS K 7206	°C	105 以上	127


[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スペーサ 試験成績書

平成 21年 5月度



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020

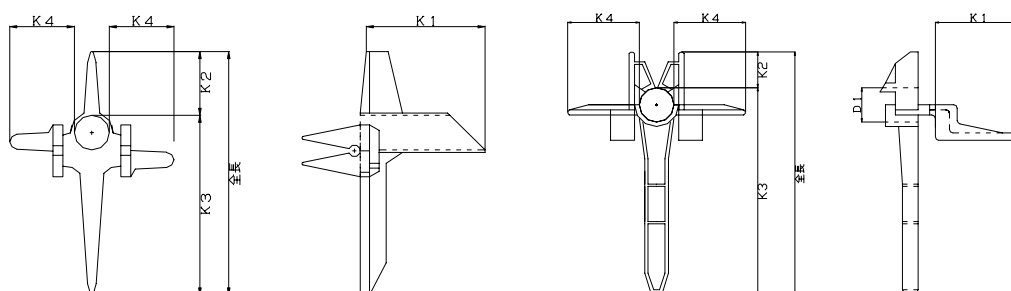

項目 種類	外 観 形 状	K 1			K 2			K 3			K 4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.7	11.0	0.5	10.8	18.0	0.5	17.7	20.0	1.0	19.7	29.0	1.0	28.5
K30-3-3	良	30.0	1.0	30.2	11.0	0.5	11.0	18.0	0.5	18.1	20.0	1.0	20.1	29.0	1.0	29.1
旧K35-3-3	良	20.0	1.0	20.2	11.0	0.5	11.1	22.0	1.0	22.2	20.0	1.0	20.2	33.0	1.0	33.3
K35-3-3	良	30.0	1.0	29.6	11.0	0.5	10.8	22.0	1.0	21.7	20.0	1.0	19.7	33.0	1.0	32.5
旧K40-3-3	良	20.0	1.0	20.4	11.0	0.5	11.2	27.0	1.0	27.5	20.0	1.0	20.4	38.0	1.0	38.7
K40-3-3	良	30.0	1.0	29.7	11.0	0.5	10.8	27.0	1.0	26.7	20.0	1.0	19.8	38.0	1.0	37.5
K40-5-4	良	30.0	1.0	30.4	15.0	0.5	15.1	23.0	1.0	23.3	19.0	0.5	19.2	38.0	1.0	38.4
旧K45-3-3	良	20.0	1.0	20.3	11.0	0.5	11.1	32.0	1.0	32.4	20.0	1.0	20.3	43.0	2.0	43.5
K45-3-3	良	30.0	1.0	29.9	11.0	0.5	10.9	32.0	1.0	31.8	20.0	1.0	19.9	43.0	2.0	42.7
K45-5-4	良	30.0	1.0	29.7	15.0	0.5	14.8	28.0	1.0	27.7	19.0	0.5	18.8	43.0	2.0	42.5
K45-6-4	良	30.0	1.0	30.0	15.0	0.5	15.0	29.0	1.0	29.0	20.0	1.0	20.0	44.0	2.0	44.0
旧K50-4-4	良	20.0	1.0	19.8	15.0	0.5	14.8	33.0	1.0	32.6	20.0	1.0	19.8	48.0	2.0	47.4
K50-4-4	良	30.0	1.0	30.4	15.0	0.5	15.1	33.0	1.0	33.4	20.0	1.0	20.2	48.0	2.0	48.5
K50-5-4	良	30.0	1.0	29.8	15.0	0.5	14.8	33.0	1.0	32.7	19.0	0.5	18.8	48.0	2.0	47.5
K50-6-4	良	30.0	1.0	29.9	15.0	0.5	14.9	33.0	1.0	32.8	20.0	1.0	19.9	48.0	2.0	47.7
K50-6-4S	良	16.0	0.5	15.9	12.0	0.5	11.9	35.0	1.0	34.7	17.0	0.5	16.8	47.0	2.0	46.6
K50-6-6S	良	16.0	0.5	15.8	12.0	0.5	11.8	35.0	1.0	34.5	17.0	0.5	16.7	47.0	2.0	46.3
旧K55-5-4	良	20.0	1.0	19.6	15.0	0.5	14.7	37.0	1.0	36.2	20.0	1.0	19.6	52.0	2.0	50.9
K55-5-4	良	30.0	1.0	30.5	15.0	0.5	15.2	37.0	1.0	37.6	20.0	1.0	20.3	52.0	2.0	52.8
K55-6-4	良	30.0	1.0	29.5	15.0	0.5	14.7	38.0	1.0	37.3	20.0	1.0	19.6	53.0	2.0	52.0
K60-6-4	良	30.0	1.0	29.7	15.0	0.5	14.8	43.0	2.0	42.5	20.0	1.0	19.8	58.0	2.0	57.3
K60-6-4S	良	15.0	0.5	15.3	12.0	0.5	12.2	45.0	2.0	45.9	17.0	0.5	17.3	57.0	2.0	58.1
K60-6-6JR	良	30.0	1.0	30.1	17.0	0.5	17.0	41.0	2.0	41.1	29.0	1.0	29.0	58.0	2.0	58.1
K60-6-6S	良	17.0	0.5	17.1	11.0	0.5	11.0	45.0	2.0	45.2	17.0	0.5	17.1	56.0	2.0	56.2
K65-6-4	良	30.0	1.0	30.3	15.0	0.5	15.1	48.0	2.0	48.4	20.0	1.0	20.2	63.0	2.5	63.5
K70-6-6	良	30.0	1.0	29.6	15.0	0.5	14.8	53.0	2.0	52.2	20.0	1.0	19.7	68.0	2.5	67.0
K70-6-6P	良	25.0	1.0	24.8	16.0	0.5	15.8	51.0	2.0	50.5	27.0	1.0	26.7	67.0	2.5	66.3
K70-6-6S	良	17.0	0.5	17.1	11.0	0.5	11.0	56.0	2.0	56.3	17.0	0.5	17.1	67.0	2.5	67.3
K70-10-10	良	18.0	0.5	18.3	9.0	0.5	9.1	58.0	2.0	58.9	22.0	1.0	22.3	67.0	2.5	68.0
K74-6-6L	良	30.0	1.0	30.5	6.0	0.5	6.1	59.0	2.0	59.9	20.0	1.0	20.3	65.0	2.5	66.0
K80-4-4L	良	30.0	1.0	30.3	6.0	0.5	6.0	57.0	2.0	57.5	22.0	1.0	22.2	63.0	2.5	63.5

項目 種類	外觀 形狀	K 1			K 2			K 3			K 4			全長		
		寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-6-6	良	30.0	1.0	29.5	15.0	0.5	14.7	63.0	2.5	61.9	20.0	1.0	19.6	78.0	2.5	76.6
K80-6-6L	良	30.0	1.0	30.4	6.0	0.5	6.0	65.0	2.5	65.8	20.0	1.0	20.2	71.0	2.5	71.8
旧K80-10-6	良	20.0	1.0	19.5	8.0	0.5	7.8	69.0	2.5	67.2	10.0	0.5	9.7	77.0	2.5	75.0
K80-10-6	良	30.0	1.0	29.9	16.0	0.5	15.9	63.0	2.5	62.7	20.0	1.0	19.9	79.0	2.5	78.6
K80-10-10	良	18.0	0.5	18.1	9.0	0.5	9.0	68.0	2.5	68.3	22.0	1.0	22.1	77.0	2.5	77.3
K85-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.0	64.0	2.5	64.0	22.0	1.0	22.0	70.0	2.5	70.0
旧K85-10-6	良	20.0	1.0	20.5	10.0	0.5	10.2	73.0	2.5	74.8	10.0	0.5	10.2	83.0	2.5	85.0
K85-10-6	良	30.0	1.0	29.8	16.0	0.5	15.8	67.0	2.5	66.5	30.0	1.0	29.7	83.0	2.5	82.3
K90-4-4L	良	30.0	1.0	29.7	6.0	0.5	5.9	69.0	2.5	68.3	22.0	1.0	21.7	75.0	2.5	74.2
K90-4-4S	良	30.0	1.0	30.4	33.0	1.0	33.4	55.0	2.0	55.7	27.0	1.0	27.3	88.0	2.5	89.1
K90-6-4	良	30.0	1.0	29.9	15.0	0.5	14.9	70.0	2.5	69.7	23.0	1.0	22.9	85.0	2.5	84.6
K90-10-6H	良	30.0	1.0	29.6	16.0	0.5	15.7	69.0	2.5	68.0	30.0	1.0	29.6	85.0	2.5	83.7
K90-10-6L	良	30.0	1.0	29.5	15.0	0.5	14.7	70.0	2.5	68.8	23.0	1.0	22.6	85.0	2.5	83.5
K95-4-4S	良	30.0	1.0	29.5	33.0	1.0	32.4	60.0	2.5	58.9	27.0	1.0	26.5	93.0	3.0	91.3
K95-6-6L	良	30.0	1.0	30.2	6.0	0.5	6.0	75.0	2.5	75.5	20.0	1.0	20.1	81.0	2.5	81.5
K95-6-6S	良	30.0	1.0	30.1	17.0	0.5	17.0	76.0	2.5	76.2	29.0	1.0	29.0	93.0	3.0	93.2
K95-10-6	良	30.0	1.0	30.4	20.0	1.0	20.2	70.0	2.5	70.9	23.0	1.0	23.3	90.0	3.0	91.1
K95-10-6H	良	30.0	1.0	30.3	16.0	0.5	16.1	74.0	2.5	74.7	30.0	1.0	30.3	90.0	3.0	90.8
K95-10-10	良	30.0	1.0	29.9	20.0	1.0	19.9	70.0	2.5	69.7	25.0	1.0	24.9	90.0	3.0	89.6
K95-13-6	良	22.0	1.0	21.5	20.0	1.0	19.5	70.0	2.5	68.4	23.0	1.0	22.4	90.0	3.0	87.9
K95-13-6L	良	30.0	1.0	30.2	20.0	1.0	20.1	70.0	2.5	70.4	23.0	1.0	23.1	90.0	3.0	90.5
K95-13-13	良	30.0	1.0	30.0	18.0	0.5	18.0	72.0	2.5	72.0	23.0	1.0	23.0	90.0	3.0	90.0
K100-10-6H	良	30.0	1.0	30.2	16.0	0.5	16.1	79.0	2.5	79.5	30.0	1.0	30.2	95.0	3.0	95.6
K100-10-6P	良	25.0	1.0	25.1	15.0	0.5	15.0	81.0	2.5	81.3	25.0	1.0	25.1	96.0	3.0	96.3
K100-10-6S	良	25.0	1.0	25.1	23.0	1.0	23.0	74.0	2.5	74.2	10.0	0.5	10.0	97.0	3.0	97.2
K100-10-10	良	30.0	1.0	29.8	19.0	0.5	18.8	76.0	2.5	75.4	24.0	1.0	23.8	95.0	3.0	94.2
K100-13-10	良	22.5	1.0	22.5	15.0	0.5	15.0	75.0	2.5	75.0	41.5	2.0	41.5	90.0	3.0	90.0
K100-13-13	良	22.0	1.0	22.1	15.0	0.5	15.0	80.0	2.5	80.3	23.0	1.0	23.1	95.0	3.0	95.3
K105-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.7	83.0	2.5	82.0	26.0	1.0	25.6	100.0	3.0	98.7
K110-4-4S	良	30.0	1.0	30.3	43.0	2.0	43.4	65.0	2.5	65.6	27.0	1.0	27.2	108.0	3.0	109.0
K110-6-6H	良	25.0	1.0	24.8	17.0	0.5	16.8	88.0	2.5	87.2	27.0	1.0	26.7	105.0	3.0	104.0
K110-10-6	良	30.0	1.0	29.9	20.0	1.0	19.9	85.0	2.5	84.7	23.0	1.0	22.9	105.0	3.0	104.6
K110-10-6H	良	30.0	1.0	29.8	16.0	0.5	15.8	89.0	2.5	88.4	30.0	1.0	29.7	105.0	3.0	104.2
K110-10-10	良	30.0	1.0	30.3	20.0	1.0	20.2	82.0	2.5	82.8	24.0	1.0	24.2	102.0	3.0	103.0
K110-13-6	良	22.0	1.0	22.3	20.0	1.0	20.2	85.0	2.5	86.1	23.0	1.0	23.3	105.0	3.0	106.3
K110-13-6L	良	30.0	1.0	30.1	20.0	1.0	20.0	85.0	2.5	85.2	23.0	1.0	23.0	105.0	3.0	105.2
K110-13-13	良	30.0	1.0	29.6	20.0	1.0	19.7	84.0	2.5	82.8	23.0	1.0	22.6	104.0	3.0	102.5
K115-6-6H	良	30.0	1.0	29.6	17.0	0.5	16.7	93.0	3.0	91.7	32.0	1.0	31.5	110.0	3.0	108.4
K120-6-6H	良	30.0	1.0	29.9	17.0	0.5	16.9	98.0	3.0	97.6	32.0	1.0	31.8	115.0	3.0	114.5
K120-10-6H	良	30.0	1.0	29.5	16.0	0.5	15.7	99.0	3.0	97.3	30.0	1.0	29.4	115.0	3.0	113.0
K120-10-10	良	30.0	1.0	29.6	20.0	1.0	19.7	95.0	3.0	93.7	24.0	1.0	23.6	115.0	3.0	113.4
K120-13-10	良	22.5	1.0	22.1	15.0	0.5	14.7	95.0	3.0	93.3	41.5	2.0	40.7	110.0	3.0	108.0
K120-13-13	良	30.0	1.0	30.5	20.0	1.0	20.3	95.0	3.0	96.5	23.0	1.0	23.3	115.0	3.0	116.8
K125-4-4S	良	30.0	1.0	30.1	48.0	2.0	48.1	75.0	2.5	75.2	27.0	1.0	27.0	123.0	3.0	123.3
K125-10-6	良	30.0	1.0	30.2	20.0	1.0	20.1	100.0	3.0	100.6	23.0	1.0	23.1	120.0	3.0	120.7
K125-13-6	良	22.0	1.0	22.2	20.0	1.0	20.1	100.0	3.0	100.9	23.0	1.0	23.2	120.0	3.0	121.0
K125-13-6L	良	30.0	1.0	30.0	20.0	1.0	20.0	100.0	3.0	100.0	23.0	1.0	23.0	120.0	3.0	120.0
K130-10-10	良	30.0	1.0	29.7	20.0	1.0	19.8	105.0	3.0	103.9	25.0	1.0	24.7	125.0	3.0	123.7
K130-13-10	良	22.5	1.0	22.5	15.0	0.5	15.0	105.0	3.0	105.0	41.5	2.0	41.5	120.0	3.0	120.0
K130-13-13	良	30.0	1.0	30.5	20.0	1.0	20.3	105.0	3.0	106.7	23.0	1.0	23.3	125.0	3.0	127.0
K135-6-6H	良	30.0	1.0	30.1	20.0	1.0	20.0	110.0	3.0	110.3	32.0	1.0	32.1	130.0	3.0	130.3
K135-10-6H	良	30.0	1.0	29.8	16.0	0.5	15.8	114.0	3.0	113.2	30.0	1.0	29.7	130.0	3.0	129.0
K145-6-6H	良	30.0	1.0	30.5	20.0	1.0	20.3	120.0	3.0	122.0	32.0	1.0	32.5	140.0	3.0	142.3
K145-10-6H	良	30.0	1.0	30.3	16.0	0.5	16.1	124.0	3.0	125.2	30.0	1.0	30.3	140.0	3.0	141.3
K150-6-6H	良	30.0	1.0	30.0	20.0	1.0	20.0	125.0	3.0	125.0	32.0	1.0	32.0	145.0	3.0	145.0
K150-10-6H	良	30.0	1.0	30.5	16.0	0.5	16.2	124.0	3.0	126.0	30.0	1.0	30.5	140.0	3.0	142.2
K150-10-10	良	30.0	1.0	30.4	20.0	1.0	20.2	125.0	3.0	126.6	25.0	1.0	25.3	145.0	3.0	146.8
K150-13-10	良	22.5	1.0	23.0	15.0	0.5	15.3	125.0	3.0	127.7	41.5	2.0	42.4	140.0	3.0	143.0
K150-13-13	良	30.0	1.0	30.2	20.0	1.0	20.1	125.0	3.0	125.8	23.0	1.0	23.1	145.0	3.0	145.9