

成形材料試験成績表

平成28年9月度



株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	962
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.3
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.74
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビッカト軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書

平成 28年 9月度




株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号

TEL:042-346-1100 FAX:042-346-2020

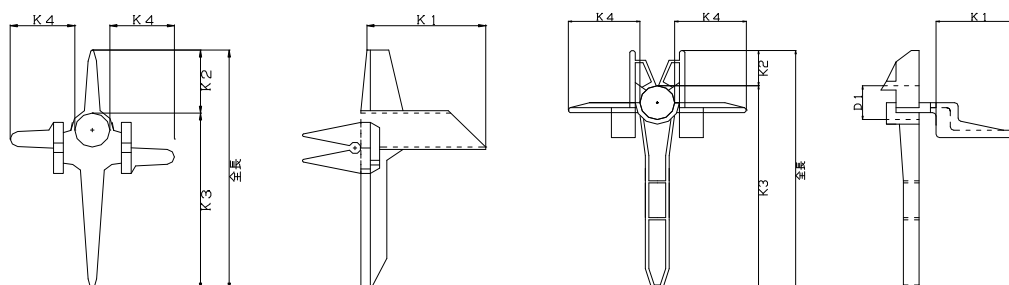

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.3	11.0	0.5	10.8	18.0	0.5	17.8	20.0	1.0	20.8	29.0	1.0	28.6
K30-3-3	良	30.0	1.0	29.7	11.0	0.5	11.1	18.0	0.5	17.9	20.0	1.0	20.8	29.0	1.0	29.0
旧K35-3-3	良	20.0	1.0	19.3	11.0	0.5	11.1	22.0	1.0	21.6	20.0	1.0	20.6	33.0	1.0	32.7
K35-3-3	良	30.0	1.0	30.0	11.0	0.5	11.0	22.0	1.0	21.9	20.0	1.0	20.7	33.0	1.0	32.9
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	11.3	27.0	1.0	27.0	20.0	1.0	20.5	38.0	1.0	38.3
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	10.9	27.0	1.0	27.1	20.0	1.0	20.7	38.0	1.0	38.0
K40-5-4	良	30.0	1.0	29.6	15.0	0.5	15.2	23.0	1.0	23.0	19.0	0.5	19.2	38.0	1.0	38.2
旧K45-3-3	良	20.0	1.0	20.0	11.0	0.5	11.3	32.0	1.0	32.2	20.0	1.0	20.5	43.0	2.0	43.5
K45-3-3	良	30.0	1.0	29.9	11.0	0.5	11.2	32.0	1.0	32.0	20.0	1.0	20.7	43.0	2.0	43.2
K45-5-4	良	30.0	1.0	29.8	15.0	0.5	15.1	28.0	1.0	28.2	19.0	0.5	19.2	43.0	2.0	43.3
K45-6-4	良	30.0	1.0	29.8	15.0	0.5	15.2	29.0	1.0	29.1	20.0	1.0	20.2	44.0	2.0	44.3
旧K50-4-4	良	20.0	1.0	19.8	15.0	0.5	15.5	33.0	1.0	32.4	20.0	1.0	20.4	48.0	2.0	47.9
K50-4-4	良	30.0	1.0	29.8	15.0	0.5	15.4	33.0	1.0	32.4	20.0	1.0	20.3	48.0	2.0	47.8
K50-5-4	良	30.0	1.0	30.0	15.0	0.5	15.0	33.0	1.0	32.8	19.0	0.5	19.1	48.0	2.0	47.8
K50-6-4	良	30.0	1.0	29.8	15.0	0.5	15.5	33.0	1.0	33.3	20.0	1.0	20.1	48.0	2.0	48.8
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.9	35.0	1.0	35.8	17.0	0.5	16.7	47.0	2.0	47.7
旧K55-5-4	良	20.0	1.0	19.1	15.0	0.5	14.8	37.0	1.0	37.5	20.0	1.0	20.4	52.0	2.0	52.3
K55-5-4	良	30.0	1.0	29.7	15.0	0.5	15.0	37.0	1.0	36.8	20.0	1.0	20.6	52.0	2.0	51.8
K55-6-4	良	30.0	1.0	30.0	15.0	0.5	15.2	38.0	1.0	38.0	20.0	1.0	20.0	53.0	2.0	53.2
K60-6-4	良	30.0	1.0	29.8	15.0	0.5	15.2	43.0	2.0	43.4	20.0	1.0	20.0	58.0	2.0	58.6
K60-6-6JR	良	30.0	1.0	29.8	17.0	0.5	16.8	41.0	2.0	40.4	29.0	1.0	28.5	58.0	2.0	57.2
K60-6-6S	良	17.0	0.5	17.2	11.0	0.5	11.3	45.0	2.0	43.9	17.0	0.5	16.8	56.0	2.0	55.2
K65-6-4	良	30.0	1.0	29.9	15.0	0.5	15.0	48.0	2.0	48.3	20.0	1.0	20.2	63.0	2.5	63.3
K70-6-6	良	30.0	1.0	29.8	15.0	0.5	15.0	53.0	2.0	53.2	20.0	1.0	19.8	68.0	2.5	68.2
K70-6-6P	良	25.0	1.0	24.8	16.0	0.5	16.3	51.0	2.0	50.5	27.0	1.0	26.4	67.0	2.5	66.8
K70-10-10	良	18.0	0.5	17.8	9.0	0.5	9.0	58.0	2.0	57.7	22.0	1.0	22.2	67.0	2.5	66.7
K74-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.3	59.0	2.0	59.6	20.0	1.0	19.7	65.0	2.5	65.9
K80-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.4	57.0	2.0	56.7	22.0	1.0	22.0	63.0	2.5	63.1
K80-6-6	良	30.0	1.0	29.1	15.0	0.5	14.9	63.0	2.5	64.0	20.0	1.0	20.0	78.0	2.5	78.9
K80-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.4	65.0	2.5	66.0	20.0	1.0	19.6	71.0	2.5	72.4
旧K80-10-6	良	20.0	1.0	19.8	8.0	0.5	8.2	69.0	2.5	68.8	10.0	0.5	9.5	77.0	2.5	77.0

種類	項目	外 観 形 状	K1			K2			K3			K4			全長		
			寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
			mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良		30.0	1.0	30.6	16.0	0.5	15.8	63.0	2.5	62.4	30.0	1.0	30.2	79.0	2.5	78.2
K80-10-10	良		18.0	0.5	17.7	9.0	0.5	9.2	68.0	2.5	67.6	22.0	1.0	21.9	77.0	2.5	76.8
K85-4-4L	良		30.0	1.0	29.9	6.0	0.5	6.4	64.0	2.5	63.7	22.0	1.0	21.5	70.0	2.5	70.1
旧K85-10-6	良		20.0	1.0	19.8	10.0	0.5	10.2	73.0	2.5	72.4	10.0	0.5	9.5	83.0	2.5	82.6
K85-10-6	良		30.0	1.0	29.6	16.0	0.5	16.1	67.0	2.5	67.6	30.0	1.0	30.1	83.0	2.5	83.7
K90-4-4L	良		30.0	1.0	29.9	6.0	0.5	6.4	69.0	2.5	69.0	22.0	1.0	21.7	75.0	2.5	75.4
K90-4-4S	良		30.0	1.0	29.4	33.0	1.0	32.7	55.0	2.0	55.1	27.0	1.0	26.5	88.0	2.5	87.8
K90-6-4	良		30.0	1.0	29.8	15.0	0.5	14.6	70.0	2.5	70.4	23.0	1.0	22.9	85.0	2.5	85.0
K90-10-6H	良		30.0	1.0	30.9	16.0	0.5	15.8	69.0	2.5	69.8	30.0	1.0	30.1	85.0	2.5	85.6
K90-10-6	良		20.0	1.0	19.3	15.0	0.5	15.5	70.0	2.5	70.7	23.0	1.0	23.4	85.0	2.5	86.2
K90-10-6L	良		30.0	1.0	29.1	15.0	0.5	15.1	70.0	2.5	70.8	23.0	1.0	23.4	85.0	2.5	85.9
K95-4-4S	良		30.0	1.0	29.5	33.0	1.0	32.6	60.0	2.5	59.9	27.0	1.0	26.9	93.0	3.0	92.5
K95-6-6L	良		30.0	1.0	30.9	6.0	0.5	6.5	75.0	2.5	75.7	20.0	1.0	19.5	81.0	2.5	82.2
K95-6-6S	良		30.0	1.0	29.2	17.0	0.5	16.8	76.0	2.5	75.7	29.0	1.0	28.2	93.0	3.0	92.5
K95-10-6	良		30.0	1.0	29.7	20.0	1.0	19.7	70.0	2.5	70.2	23.0	1.0	22.8	90.0	3.0	89.9
K95-10-6H	良		30.0	1.0	30.5	16.0	0.5	15.7	74.0	2.5	75.8	30.0	1.0	30.0	90.0	3.0	91.5
K95-10-10	良		30.0	1.0	30.4	20.0	1.0	20.2	70.0	2.5	69.6	25.0	1.0	24.5	90.0	3.0	89.8
K95-13-6	良		22.0	1.0	21.8	20.0	1.0	19.5	70.0	2.5	70.1	23.0	1.0	23.5	90.0	3.0	89.6
K95-13-6L	良		30.0	1.0	29.8	20.0	1.0	20.2	70.0	2.5	70.3	23.0	1.0	23.4	90.0	3.0	90.5
K95-13-13	良		30.0	1.0	30.6	18.0	0.5	18.5	72.0	2.5	71.0	23.0	1.0	22.9	90.0	3.0	89.5
K100-10-6H	良		30.0	1.0	30.8	16.0	0.5	15.7	79.0	2.5	79.2	30.0	1.0	29.9	95.0	3.0	94.9
K100-10-6P	良		25.0	1.0	24.7	15.0	0.5	15.5	81.0	2.5	80.4	25.0	1.0	24.8	96.0	3.0	95.9
K100-10-10	良		30.0	1.0	29.6	19.0	0.5	18.5	76.0	2.5	76.2	24.0	1.0	23.6	95.0	3.0	94.7
K100-13-10	良		22.5	1.0	22.7	15.0	0.5	14.5	75.0	2.5	76.3	41.5	2.0	41.5	90.0	3.0	90.8
K100-13-13	良		22.0	1.0	21.6	15.0	0.5	15.5	80.0	2.5	79.6	23.0	1.0	22.4	95.0	3.0	95.1
K105-6-6H	良		25.0	1.0	24.6	17.0	0.5	16.6	83.0	2.5	82.7	26.0	1.0	26.4	100.0	3.0	99.3
K110-4-4S	良		30.0	1.0	29.9	43.0	2.0	43.4	65.0	2.5	64.2	27.0	1.0	26.9	108.0	3.0	107.6
K110-6-6H	良		25.0	1.0	24.6	17.0	0.5	16.5	88.0	2.5	88.3	27.0	1.0	26.5	105.0	3.0	104.8
K110-10-6	良		30.0	1.0	29.7	20.0	1.0	20.1	85.0	2.5	85.2	23.0	1.0	22.6	105.0	3.0	105.3
K110-10-6H	良		30.0	1.0	30.8	16.0	0.5	15.5	89.0	2.5	89.4	30.0	1.0	30.0	105.0	3.0	104.9
K110-10-10	良		30.0	1.0	30.5	20.0	1.0	20.2	82.0	2.5	81.4	24.0	1.0	24.3	102.0	3.0	101.6
K110-13-6	良		22.0	1.0	21.8	20.0	1.0	20.0	85.0	2.5	85.4	23.0	1.0	22.9	105.0	3.0	105.4
K110-13-6L	良		30.0	1.0	29.8	20.0	1.0	19.6	85.0	2.5	85.4	23.0	1.0	23.1	105.0	3.0	105.0
K110-13-13	良		30.0	1.0	30.1	18.0	1.0	18.5	84.0	2.5	84.0	23.0	1.0	23.2	104.0	3.0	102.5
K115-6-6H	良		25.0	1.0	24.5	17.0	0.5	16.6	93.0	3.0	93.4	27.0	1.0	26.5	110.0	3.0	110.0
K120-6-6H	良		25.0	1.0	24.6	17.0	0.5	16.6	98.0	3.0	98.3	27.0	1.0	26.3	115.0	3.0	114.9
K120-10-6H	良		30.0	1.0	30.6	16.0	0.5	15.6	99.0	3.0	99.4	30.0	1.0	30.0	115.0	3.0	115.0
K120-10-10	良		30.0	1.0	30.5	20.0	1.0	19.8	95.0	3.0	94.6	24.0	1.0	24.2	115.0	3.0	114.4
K120-13-10	良		22.5	1.0	22.8	15.0	0.5	14.7	95.0	3.0	96.3	41.5	2.0	41.6	110.0	3.0	111.0
K120-13-13	良		30.0	1.0	30.0	20.0	1.0	19.6	95.0	3.0	95.3	23.0	1.0	23.2	115.0	3.0	114.9
K125-4-4S	良		30.0	1.0	29.7	48.0	2.0	47.3	75.0	2.5	74.1	27.0	1.0	26.9	123.0	3.0	121.4
K125-10-6	良		30.0	1.0	30.0	20.0	1.0	19.7	100.0	3.0	100.0	23.0	1.0	22.8	120.0	3.0	119.7
K125-13-6	良		22.0	1.0	22.1	20.0	1.0	20.3	100.0	3.0	99.3	23.0	1.0	23.1	120.0	3.0	119.6
K125-13-6L	良		30.0	1.0	30.2	20.0	1.0	19.6	100.0	3.0	99.0	23.0	1.0	23.2	120.0	3.0	118.6
K130-10-10	良		30.0	1.0	30.4	20.0	1.0	20.5	105.0	3.0	105.0	25.0	1.0	24.7	125.0	3.0	125.5
K130-13-10	良		22.5	1.0	22.3	15.0	0.5	14.6	105.0	3.0	106.0	41.5	2.0	41.5	120.0	3.0	120.6
K130-13-13	良		30.0	1.0	30.0	20.0	1.0	19.5	105.0	3.0	105.1	23.0	1.0	23.3	125.0	3.0	124.6
K135-10-6H	良		30.0	1.0	30.0	16.0	0.5	15.6	114.0	3.0	114.2	30.0	1.0	29.5	130.0	3.0	129.8
K145-10-6H	良		30.0	1.0	29.9	16.0	0.5	15.9	124.0	3.0	123.1	30.0	1.0	29.9	140.0	3.0	139.0
K150-10-10	良		30.0	1.0	30.7	20.0	1.0	20.2	125.0	3.0	123.8	25.0	1.0	24.8	145.0	3.0	144.0
K150-13-10	良		22.5	1.0	22.4	15.0	0.5	14.9	125.0	3.0	125.7	41.5	2.0	41.7	140.0	3.0	140.6
K150-13-13	良		30.0	1.0	30.1	20.0	1.0	20.6	125.0	3.0	123.7	23.0	1.0	23.0	145.0	3.0	144.3