

成形材料試験成績表

平成29年1月度



株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	962
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.1
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.95
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビッカト軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書

平成 29年 1月度




株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号

TEL:042-346-1100 FAX:042-346-2020

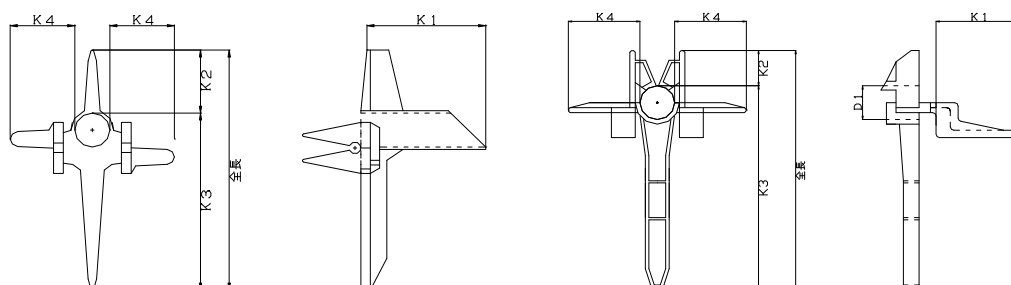

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.3	11.0	0.5	11.1	18.0	0.5	17.9	20.0	1.0	20.7	29.0	1.0	29.0
K30-3-3	良	30.0	1.0	29.8	11.0	0.5	11.2	18.0	0.5	17.9	20.0	1.0	20.8	29.0	1.0	29.1
旧K35-3-3	良	20.0	1.0	19.1	11.0	0.5	11.0	22.0	1.0	21.7	20.0	1.0	20.7	33.0	1.0	32.7
K35-3-3	良	30.0	1.0	29.8	11.0	0.5	11.0	22.0	1.0	22.0	20.0	1.0	20.6	33.0	1.0	33.0
旧K40-3-3	良	20.0	1.0	19.9	11.0	0.5	11.0	27.0	1.0	26.9	20.0	1.0	20.6	38.0	1.0	37.9
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	27.0	1.0	27.1	20.0	1.0	20.5	38.0	1.0	38.4
K40-5-4	良	30.0	1.0	29.7	15.0	0.5	15.1	23.0	1.0	22.8	19.0	0.5	19.3	38.0	1.0	37.9
旧K45-3-3	良	20.0	1.0	20.0	11.0	0.5	11.0	32.0	1.0	32.0	20.0	1.0	20.5	43.0	2.0	43.0
K45-3-3	良	30.0	1.0	29.9	11.0	0.5	11.2	32.0	1.0	32.4	20.0	1.0	20.6	43.0	2.0	43.6
K45-5-4	良	30.0	1.0	29.8	15.0	0.5	15.3	28.0	1.0	27.9	19.0	0.5	19.3	43.0	2.0	43.2
K45-6-4	良	30.0	1.0	29.8	15.0	0.5	15.3	29.0	1.0	29.0	20.0	1.0	20.1	44.0	2.0	44.3
旧K50-4-4	良	20.0	1.0	19.9	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.3	48.0	2.0	47.7
K50-4-4	良	30.0	1.0	29.9	15.0	0.5	15.5	33.0	1.0	32.4	20.0	1.0	20.3	48.0	2.0	47.9
K50-5-4	良	30.0	1.0	29.6	15.0	0.5	15.2	33.0	1.0	32.6	19.0	0.5	19.4	48.0	2.0	47.8
K50-6-4	良	30.0	1.0	30.0	15.0	0.5	15.3	33.0	1.0	33.2	20.0	1.0	20.2	48.0	2.0	48.5
K50-6-6S	良	16.0	0.5	15.6	12.0	0.5	12.0	35.0	1.0	35.9	17.0	0.5	16.7	47.0	2.0	47.9
旧K55-5-4	良	20.0	1.0	19.0	15.0	0.5	15.0	37.0	1.0	36.9	20.0	1.0	20.6	52.0	2.0	51.9
K55-5-4	良	30.0	1.0	29.8	15.0	0.5	15.0	37.0	1.0	37.2	20.0	1.0	20.4	52.0	2.0	52.2
K55-6-4	良	30.0	1.0	29.7	15.0	0.5	14.9	38.0	1.0	38.3	20.0	1.0	20.2	53.0	2.0	53.2
K60-6-4	良	30.0	1.0	29.9	15.0	0.5	15.1	43.0	2.0	43.2	20.0	1.0	20.0	58.0	2.0	58.3
K60-6-6JR	良	30.0	1.0	30.1	17.0	0.5	17.0	41.0	2.0	40.5	29.0	1.0	28.5	58.0	2.0	57.5
K60-6-6S	良	17.0	0.5	17.4	11.0	0.5	11.5	45.0	2.0	43.7	17.0	0.5	16.7	56.0	2.0	55.2
K65-6-4	良	30.0	1.0	29.8	15.0	0.5	15.3	48.0	2.0	48.4	20.0	1.0	20.1	63.0	2.5	63.7
K70-6-6	良	30.0	1.0	29.8	15.0	0.5	14.8	53.0	2.0	54.2	20.0	1.0	20.2	68.0	2.5	69.0
K70-6-6P	良	25.0	1.0	24.6	16.0	0.5	16.3	51.0	2.0	50.6	27.0	1.0	26.6	67.0	2.5	66.9
K70-10-10	良	18.0	0.5	18.0	9.0	0.5	9.2	58.0	2.0	57.8	22.0	1.0	22.0	67.0	2.5	67.0
K74-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.3	59.0	2.0	59.6	20.0	1.0	19.5	65.0	2.5	65.9
K80-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.5	57.0	2.0	56.7	22.0	1.0	21.8	63.0	2.5	63.2
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.7	63.0	2.5	64.1	20.0	1.0	20.1	78.0	2.5	78.8
K80-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	65.0	2.5	65.9	20.0	1.0	19.6	71.0	2.5	72.3
旧K80-10-6	良	20.0	1.0	20.4	8.0	0.5	8.2	69.0	2.5	68.6	10.0	0.5	9.5	77.0	2.5	76.8

種類	項目	外 観 形 状	K1			K2			K3			K4			全長		
			寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
			mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良		30.0	1.0	30.7	16.0	0.5	15.5	63.0	2.5	62.7	30.0	1.0	30.3	79.0	2.5	78.2
K80-10-10	良		18.0	0.5	17.6	9.0	0.5	9.2	68.0	2.5	67.7	22.0	1.0	22.0	77.0	2.5	76.9
K85-4-4L	良		30.0	1.0	29.8	6.0	0.5	6.5	64.0	2.5	63.7	22.0	1.0	22.0	70.0	2.5	70.2
旧K85-10-6	良		20.0	1.0	19.9	10.0	0.5	10.2	73.0	2.5	72.5	10.0	0.5	9.5	83.0	2.5	82.7
K85-10-6	良		30.0	1.0	29.7	16.0	0.5	16.1	67.0	2.5	67.7	30.0	1.0	30.0	83.0	2.5	83.8
K90-4-4L	良		30.0	1.0	29.8	6.0	0.5	6.5	69.0	2.5	68.6	22.0	1.0	21.6	75.0	2.5	75.1
K90-4-4S	良		30.0	1.0	30.0	33.0	1.0	32.4	55.0	2.0	55.2	27.0	1.0	26.8	88.0	2.5	87.6
K90-6-4	良		30.0	1.0	29.8	15.0	0.5	14.6	70.0	2.5	70.2	23.0	1.0	22.7	85.0	2.5	84.8
K90-10-6H	良		30.0	1.0	30.5	16.0	0.5	15.7	69.0	2.5	69.9	30.0	1.0	30.2	85.0	2.5	85.6
K90-10-6	良		20.0	1.0	19.4	15.0	0.5	15.3	70.0	2.5	70.5	23.0	1.0	23.4	85.0	2.5	85.8
K90-10-6L	良		30.0	1.0	29.2	15.0	0.5	15.4	70.0	2.5	70.9	23.0	1.0	23.4	85.0	2.5	86.3
K95-4-4S	良		30.0	1.0	29.5	33.0	1.0	32.7	60.0	2.5	60.4	27.0	1.0	26.6	93.0	3.0	93.1
K95-6-6L	良		30.0	1.0	30.8	6.0	0.5	6.5	75.0	2.5	75.8	20.0	1.0	19.5	81.0	2.5	82.3
K95-6-6S	良		30.0	1.0	30.0	17.0	0.5	17.2	76.0	2.5	75.5	29.0	1.0	28.5	93.0	3.0	92.7
K95-10-6	良		30.0	1.0	29.7	20.0	1.0	19.7	70.0	2.5	70.5	23.0	1.0	22.4	90.0	3.0	90.2
K95-10-6H	良		30.0	1.0	30.5	16.0	0.5	15.7	74.0	2.5	75.3	30.0	1.0	30.2	90.0	3.0	91.0
K95-10-10	良		30.0	1.0	30.1	20.0	1.0	20.0	70.0	2.5	69.7	25.0	1.0	24.6	90.0	3.0	89.7
K95-13-6	良		22.0	1.0	21.9	20.0	1.0	20.4	70.0	2.5	70.3	23.0	1.0	23.1	90.0	3.0	90.7
K95-13-6L	良		30.0	1.0	29.9	20.0	1.0	20.5	70.0	2.5	70.7	23.0	1.0	23.4	90.0	3.0	91.2
K95-13-13	良		30.0	1.0	30.1	18.0	0.5	18.5	72.0	2.5	71.1	23.0	1.0	23.1	90.0	3.0	89.6
K100-10-6H	良		30.0	1.0	31.0	16.0	0.5	15.7	79.0	2.5	79.0	30.0	1.0	30.2	95.0	3.0	94.7
K100-10-6P	良		25.0	1.0	24.8	15.0	0.5	15.5	81.0	2.5	80.6	25.0	1.0	24.5	96.0	3.0	96.1
K100-10-10	良		30.0	1.0	29.7	19.0	0.5	18.5	76.0	2.5	76.7	24.0	1.0	23.3	95.0	3.0	95.2
K100-13-10	良		22.5	1.0	22.5	15.0	0.5	14.9	75.0	2.5	76.1	41.5	2.0	41.6	90.0	3.0	91.0
K100-13-13	良		22.0	1.0	21.7	15.0	0.5	15.5	80.0	2.5	79.6	23.0	1.0	22.4	95.0	3.0	95.1
K105-6-6H	良		25.0	1.0	24.7	17.0	0.5	16.6	83.0	2.5	83.4	26.0	1.0	26.5	100.0	3.0	100.0
K110-4-4S	良		30.0	1.0	29.8	43.0	2.0	43.1	65.0	2.5	64.2	27.0	1.0	26.6	108.0	3.0	107.3
K110-6-6H	良		25.0	1.0	24.7	17.0	0.5	16.5	88.0	2.5	88.1	27.0	1.0	26.4	105.0	3.0	104.6
K110-10-6	良		30.0	1.0	29.6	20.0	1.0	19.8	85.0	2.5	84.6	23.0	1.0	22.4	105.0	3.0	104.4
K110-10-6H	良		30.0	1.0	30.5	16.0	0.5	15.7	89.0	2.5	89.5	30.0	1.0	30.2	105.0	3.0	105.2
K110-10-10	良		30.0	1.0	30.6	20.0	1.0	19.7	82.0	2.5	82.0	24.0	1.0	24.3	102.0	3.0	101.7
K110-13-6	良		22.0	1.0	21.9	20.0	1.0	20.2	85.0	2.5	85.2	23.0	1.0	23.3	105.0	3.0	105.4
K110-13-6L	良		30.0	1.0	30.1	20.0	1.0	20.3	85.0	2.5	84.8	23.0	1.0	23.4	105.0	3.0	105.1
K110-13-13	良		30.0	1.0	30.6	18.0	1.0	18.5	84.0	2.5	83.5	23.0	1.0	23.3	104.0	3.0	102.0
K115-6-6H	良		25.0	1.0	24.5	17.0	0.5	16.6	93.0	3.0	92.9	27.0	1.0	26.5	110.0	3.0	109.5
K120-6-6H	良		25.0	1.0	24.6	17.0	0.5	16.5	98.0	3.0	98.3	27.0	1.0	26.2	115.0	3.0	114.8
K120-10-6H	良		30.0	1.0	30.9	16.0	0.5	15.7	99.0	3.0	99.4	30.0	1.0	30.2	115.0	3.0	115.1
K120-10-10	良		30.0	1.0	30.3	20.0	1.0	20.3	95.0	3.0	94.6	24.0	1.0	24.1	115.0	3.0	114.9
K120-13-10	良		22.5	1.0	22.9	15.0	0.5	14.8	95.0	3.0	96.1	41.5	2.0	41.5	110.0	3.0	110.9
K120-13-13	良		30.0	1.0	30.3	20.0	1.0	20.2	95.0	3.0	95.8	23.0	1.0	23.4	115.0	3.0	116.0
K125-4-4S	良		30.0	1.0	29.7	48.0	2.0	47.2	75.0	2.5	75.3	27.0	1.0	26.7	123.0	3.0	122.5
K125-10-6	良		30.0	1.0	30.0	20.0	1.0	19.3	100.0	3.0	99.6	23.0	1.0	22.7	120.0	3.0	118.9
K125-13-6	良		22.0	1.0	21.7	20.0	1.0	20.3	100.0	3.0	99.7	23.0	1.0	23.4	120.0	3.0	120.0
K125-13-6L	良		30.0	1.0	30.0	20.0	1.0	20.2	100.0	3.0	99.3	23.0	1.0	23.5	120.0	3.0	119.5
K130-10-10	良		30.0	1.0	30.0	20.0	1.0	19.5	105.0	3.0	104.9	25.0	1.0	24.5	125.0	3.0	124.4
K130-13-10	良		22.5	1.0	22.5	15.0	0.5	14.6	105.0	3.0	105.5	41.5	2.0	41.7	120.0	3.0	120.1
K130-13-13	良		30.0	1.0	30.4	20.0	1.0	19.7	105.0	3.0	105.6	23.0	1.0	23.3	125.0	3.0	125.3
K135-10-6H	良		30.0	1.0	30.3	16.0	0.5	15.5	114.0	3.0	113.6	30.0	1.0	29.9	130.0	3.0	129.1
K145-10-6H	良		30.0	1.0	29.7	16.0	0.5	15.6	124.0	3.0	124.4	30.0	1.0	29.6	140.0	3.0	140.0
K150-10-10	良		30.0	1.0	30.7	20.0	1.0	19.7	125.0	3.0	124.5	25.0	1.0	24.3	145.0	3.0	144.2
K150-13-10	良		22.5	1.0	22.5	15.0	0.5	14.6	125.0	3.0	126.8	41.5	2.0	41.6	140.0	3.0	141.4
K150-13-13	良		30.0	1.0	30.0	20.0	1.0	19.7	125.0	3.0	124.6	23.0	1.0	23.2	145.0	3.0	144.3