

成形材料試験成績表

平成29年11月度



株式会社 未来樹脂



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	961
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.2
引張降伏強さ	JIS K 7161	MPa	19.61 以上	28.28
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカト軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書

平成 29年 11月度




株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号

TEL:042-346-1100 FAX:042-346-2020

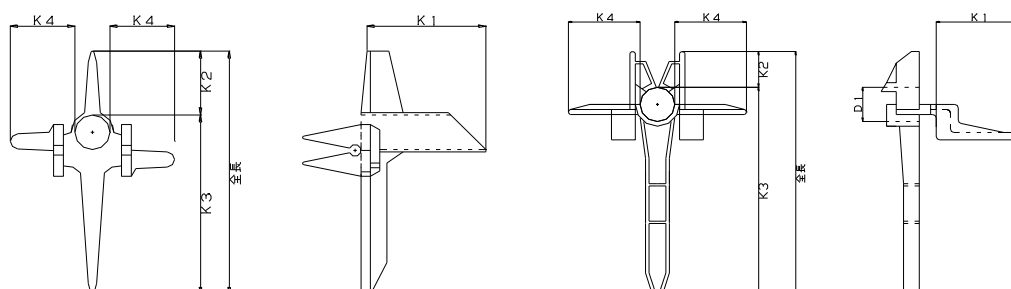

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.3	11.0	0.5	11.0	18.0	0.5	17.8	20.0	1.0	20.8	29.0	1.0	28.8
K30-3-3	良	30.0	1.0	29.8	11.0	0.5	11.0	18.0	0.5	17.9	20.0	1.0	20.6	29.0	1.0	28.9
旧K35-3-3	良	20.0	1.0	19.3	11.0	0.5	10.9	22.0	1.0	21.8	20.0	1.0	20.6	33.0	1.0	32.7
K35-3-3	良	30.0	1.0	30.0	11.0	0.5	11.1	22.0	1.0	21.8	20.0	1.0	20.8	33.0	1.0	32.9
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	11.2	27.0	1.0	27.1	20.0	1.0	20.4	38.0	1.0	38.3
K40-3-3	良	30.0	1.0	30.1	11.0	0.5	11.0	27.0	1.0	27.2	20.0	1.0	20.5	38.0	1.0	38.2
K40-5-4	良	30.0	1.0	29.5	15.0	0.5	15.2	23.0	1.0	22.9	19.0	0.5	19.1	38.0	1.0	38.1
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	10.9	32.0	1.0	32.0	20.0	1.0	20.4	43.0	2.0	42.9
K45-3-3	良	30.0	1.0	30.0	11.0	0.5	11.2	32.0	1.0	32.2	20.0	1.0	20.5	43.0	2.0	43.4
K45-5-4	良	30.0	1.0	29.9	15.0	0.5	15.2	28.0	1.0	28.2	19.0	0.5	19.1	43.0	2.0	43.4
K45-6-4	良	30.0	1.0	30.0	15.0	0.5	15.3	29.0	1.0	29.0	20.0	1.0	20.2	44.0	2.0	44.3
旧K50-4-4	良	20.0	1.0	20.1	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.2	48.0	2.0	47.7
K50-4-4	良	30.0	1.0	29.8	15.0	0.5	15.5	33.0	1.0	32.5	20.0	1.0	20.4	48.0	2.0	48.0
K50-5-4	良	30.0	1.0	29.8	15.0	0.5	15.1	33.0	1.0	32.6	19.0	0.5	19.0	48.0	2.0	47.7
K50-6-4	良	30.0	1.0	29.9	15.0	0.5	15.5	33.0	1.0	33.1	20.0	1.0	20.2	48.0	2.0	48.6
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.7	35.0	1.0	35.8	17.0	0.5	16.6	47.0	2.0	47.5
旧K55-5-4	良	20.0	1.0	19.1	15.0	0.5	15.2	37.0	1.0	37.1	20.0	1.0	20.4	52.0	2.0	52.3
K55-5-4	良	30.0	1.0	30.0	15.0	0.5	14.8	37.0	1.0	37.0	20.0	1.0	20.5	52.0	2.0	51.8
K55-6-4	良	30.0	1.0	29.8	15.0	0.5	15.2	38.0	1.0	38.1	20.0	1.0	20.2	53.0	2.0	53.3
K60-6-4	良	30.0	1.0	30.1	15.0	0.5	15.3	43.0	2.0	43.4	20.0	1.0	20.2	58.0	2.0	58.7
K60-6-6JR	良	30.0	1.0	29.6	17.0	0.5	17.0	41.0	2.0	40.4	29.0	1.0	28.4	58.0	2.0	57.4
K60-6-6S	良	17.0	0.5	17.3	11.0	0.5	11.4	45.0	2.0	43.6	17.0	0.5	16.6	56.0	2.0	55.0
K65-6-4	良	30.0	1.0	29.8	15.0	0.5	15.3	48.0	2.0	48.0	20.0	1.0	20.2	63.0	2.5	63.3
K70-6-6	良	30.0	1.0	29.9	15.0	0.5	15.0	53.0	2.0	53.4	20.0	1.0	20.2	68.0	2.5	68.4
K70-6-6P	良	25.0	1.0	24.7	16.0	0.5	16.3	51.0	2.0	51.0	27.0	1.0	26.7	67.0	2.5	67.3
K70-10-10	良	18.0	0.5	17.8	9.0	0.5	9.0	58.0	2.0	57.8	22.0	1.0	22.1	67.0	2.5	66.8
K74-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	59.0	2.0	59.1	20.0	1.0	19.6	65.0	2.5	65.5
K80-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.5	57.0	2.0	56.9	22.0	1.0	21.6	63.0	2.5	63.4
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.9	63.0	2.5	64.2	20.0	1.0	19.9	78.0	2.5	79.1
K80-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.5	65.0	2.5	66.0	20.0	1.0	19.6	71.0	2.5	72.5
旧K80-10-6	良	20.0	1.0	20.3	8.0	0.5	8.3	69.0	2.5	68.7	10.0	0.5	9.5	77.0	2.5	77.0

項目 種類	外觀 形状	K1			K2			K3			K4			全長		
		寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.9	16.0	0.5	15.7	62.0	2.5	62.6	30.0	1.0	30.1	78.0	2.5	78.3
K80-10-10	良	18.0	0.5	18.1	9.0	0.5	9.2	68.0	2.5	67.8	22.0	1.0	22.1	77.0	2.5	77.0
K85-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.5	64.0	2.5	63.8	22.0	1.0	21.6	70.0	2.5	70.3
旧K85-10-6	良	20.0	1.0	19.9	10.0	0.5	10.2	73.0	2.5	72.2	10.0	0.5	9.5	83.0	2.5	82.4
K85-10-6	良	30.0	1.0	30.0	16.0	0.5	15.8	67.0	2.5	67.8	30.0	1.0	30.1	83.0	2.5	83.6
K90-4-4L	良	30.0	1.0	30.1	6.0	0.5	6.5	69.0	2.5	68.9	22.0	1.0	21.5	75.0	2.5	75.4
K90-4-4S	良	30.0	1.0	29.6	33.0	1.0	32.5	55.0	2.0	55.6	27.0	1.0	26.7	88.0	2.5	88.1
K90-6-4	良	30.0	1.0	30.3	15.0	0.5	14.5	70.0	2.5	70.4	23.0	1.0	23.5	85.0	2.5	84.9
K90-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.8	69.0	2.5	69.5	30.0	1.0	30.3	85.0	2.5	85.3
K90-10-6	良	20.0	1.0	19.4	15.0	0.5	15.3	70.0	2.5	71.0	23.0	1.0	23.4	85.0	2.5	86.3
K90-10-6L	良	30.0	1.0	29.2	15.0	0.5	15.4	70.0	2.5	70.5	23.0	1.0	23.3	85.0	2.5	85.9
K95-4-4S	良	30.0	1.0	29.9	33.0	1.0	32.4	60.0	2.5	60.0	27.0	1.0	26.7	93.0	3.0	92.4
K95-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	75.0	2.5	75.7	20.0	1.0	19.6	81.0	2.5	82.1
K95-6-6S	良	30.0	1.0	29.3	17.0	0.5	17.1	76.0	2.5	75.4	29.0	1.0	28.4	93.0	3.0	92.5
K95-10-6	良	30.0	1.0	30.0	20.0	1.0	19.4	70.0	2.5	70.8	23.0	1.0	22.8	90.0	3.0	90.2
K95-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.6	74.0	2.5	75.7	30.0	1.0	30.2	90.0	3.0	91.3
K95-10-10	良	30.0	1.0	30.2	20.0	1.0	19.6	70.0	2.5	69.6	25.0	1.0	24.4	90.0	3.0	89.2
K95-13-6	良	22.0	1.0	21.8	20.0	1.0	20.1	70.0	2.5	70.1	23.0	1.0	23.0	90.0	3.0	90.2
K95-13-6L	良	30.0	1.0	30.0	20.0	1.0	20.0	70.0	2.5	70.2	23.0	1.0	23.5	90.0	3.0	90.2
K95-13-13	良	30.0	1.0	30.3	18.0	0.5	18.5	72.0	2.5	71.2	23.0	1.0	23.0	90.0	3.0	89.7
K100-10-6H	良	30.0	1.0	30.9	16.0	0.5	15.8	79.0	2.5	79.4	30.0	1.0	30.0	95.0	3.0	95.2
K100-10-6P	良	25.0	1.0	24.6	15.0	0.5	15.5	81.0	2.5	80.1	25.0	1.0	24.6	96.0	3.0	95.6
K100-10-10	良	30.0	1.0	29.5	19.0	0.5	18.5	76.0	2.5	76.9	24.0	1.0	23.6	95.0	3.0	95.4
K100-13-10	良	22.5	1.0	22.8	15.0	0.5	14.6	75.0	2.5	76.1	41.5	2.0	41.4	90.0	3.0	90.7
K100-13-13	良	22.0	1.0	21.9	15.0	0.5	15.5	80.0	2.5	79.8	23.0	1.0	22.3	95.0	3.0	95.3
K105-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	83.0	2.5	83.2	26.0	1.0	26.4	100.0	3.0	99.8
K110-4-4S	良	30.0	1.0	29.5	43.0	2.0	42.7	65.0	2.5	64.5	27.0	1.0	26.8	108.0	3.0	107.2
K110-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	88.0	2.5	87.9	27.0	1.0	26.4	105.0	3.0	104.5
K110-10-6	良	30.0	1.0	29.6	20.0	1.0	19.7	85.0	2.5	84.7	23.0	1.0	22.9	105.0	3.0	104.4
K110-10-6H	良	30.0	1.0	31.0	16.0	0.5	15.8	89.0	2.5	89.4	30.0	1.0	30.1	105.0	3.0	105.2
K110-10-10	良	30.0	1.0	30.6	20.0	1.0	20.6	82.0	2.5	81.3	24.0	1.0	24.1	102.0	3.0	101.9
K110-13-6	良	22.0	1.0	22.0	20.0	1.0	19.5	85.0	2.5	84.5	23.0	1.0	23.3	105.0	3.0	104.0
K110-13-6L	良	30.0	1.0	29.8	20.0	1.0	19.6	85.0	2.5	84.4	23.0	1.0	23.1	105.0	3.0	104.0
K110-13-13	良	30.0	1.0	30.4	20.0	1.0	19.9	84.0	2.5	83.6	23.0	1.0	23.2	104.0	3.0	103.5
K115-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	93.0	3.0	92.9	27.0	1.0	26.5	110.0	3.0	109.4
K120-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	98.0	3.0	98.1	27.0	1.0	26.3	115.0	3.0	114.7
K120-10-6H	良	30.0	1.0	31.0	16.0	0.5	15.7	99.0	3.0	99.2	30.0	1.0	30.0	115.0	3.0	114.9
K120-10-10	良	30.0	1.0	30.4	20.0	1.0	20.3	95.0	3.0	94.7	24.0	1.0	24.4	115.0	3.0	115.0
K120-13-10	良	22.5	1.0	22.4	15.0	0.5	14.8	95.0	3.0	96.6	41.5	2.0	41.5	110.0	3.0	111.4
K120-13-13	良	30.0	1.0	30.2	20.0	1.0	19.5	95.0	3.0	95.3	23.0	1.0	23.5	115.0	3.0	114.8
K125-4-4S	良	30.0	1.0	29.9	48.0	2.0	47.3	75.0	2.5	74.9	27.0	1.0	26.6	123.0	3.0	122.2
K125-10-6	良	30.0	1.0	29.8	20.0	1.0	20.0	100.0	3.0	100.3	23.0	1.0	22.3	120.0	3.0	120.3
K125-13-6	良	22.0	1.0	22.0	20.0	1.0	19.9	100.0	3.0	98.8	23.0	1.0	23.2	120.0	3.0	118.7
K125-13-6L	良	30.0	1.0	30.0	20.0	1.0	20.0	100.0	3.0	99.2	23.0	1.0	23.5	120.0	3.0	119.2
K130-10-10	良	30.0	1.0	30.8	20.0	1.0	20.1	105.0	3.0	105.3	25.0	1.0	24.6	125.0	3.0	125.4
K130-13-10	良	22.5	1.0	22.3	15.0	0.5	14.6	105.0	3.0	105.4	41.5	2.0	41.4	120.0	3.0	120.0
K130-13-13	良	30.0	1.0	30.1	20.0	1.0	19.8	105.0	3.0	105.5	23.0	1.0	23.3	125.0	3.0	125.3
K135-10-6H	良	30.0	1.0	30.3	16.0	0.5	15.5	114.0	3.0	113.6	30.0	1.0	29.2	130.0	3.0	129.1
K145-10-6H	良	30.0	1.0	29.8	16.0	0.5	15.8	124.0	3.0	123.8	30.0	1.0	29.7	140.0	3.0	139.6
K150-10-10	良	30.0	1.0	30.2	20.0	1.0	20.5	125.0	3.0	124.7	25.0	1.0	24.5	145.0	3.0	145.2
K150-13-10	良	22.5	1.0	22.5	15.0	0.5	14.9	125.0	3.0	125.2	41.5	2.0	41.4	140.0	3.0	140.1
K150-13-13	良	30.0	1.0	30.1	20.0	1.0	20.3	125.0	3.0	124.9	23.0	1.0	23.0	145.0	3.0	145.2