

成形材料試験成績表

平成30年5月度



株式会社 未来樹脂



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	963
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.2
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.93
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	63
ビカッ軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書

平成 30年 5月度




株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号

TEL:042-346-1100 FAX:042-346-2020

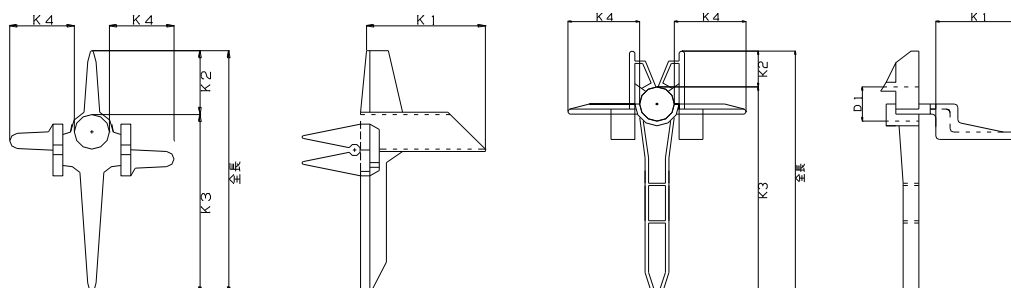

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.2	11.0	0.5	11.2	18.0	0.5	17.9	20.0	1.0	20.7	29.0	1.0	29.1
K30-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	18.0	0.5	17.9	20.0	1.0	20.6	29.0	1.0	29.2
旧K35-3-3	良	20.0	1.0	19.4	11.0	0.5	11.1	22.0	1.0	21.9	20.0	1.0	20.6	33.0	1.0	33.0
K35-3-3	良	30.0	1.0	29.7	11.0	0.5	11.0	22.0	1.0	21.8	20.0	1.0	20.8	33.0	1.0	32.8
旧K40-3-3	良	20.0	1.0	19.9	11.0	0.5	10.9	27.0	1.0	27.0	20.0	1.0	20.5	38.0	1.0	37.9
K40-3-3	良	30.0	1.0	30.1	11.0	0.5	11.2	27.0	1.0	27.0	20.0	1.0	20.7	38.0	1.0	38.2
K40-5-4	良	30.0	1.0	29.8	15.0	0.5	15.1	23.0	1.0	23.0	19.0	0.5	18.9	38.0	1.0	38.1
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	10.9	32.0	1.0	32.3	20.0	1.0	20.5	43.0	2.0	43.2
K45-3-3	良	30.0	1.0	30.0	11.0	0.5	11.1	32.0	1.0	32.3	20.0	1.0	20.6	43.0	2.0	43.4
K45-5-4	良	30.0	1.0	30.3	15.0	0.5	15.2	28.0	1.0	27.9	19.0	0.5	19.4	43.0	2.0	43.1
K45-6-4	良	30.0	1.0	29.8	15.0	0.5	15.0	29.0	1.0	29.1	20.0	1.0	20.1	44.0	2.0	44.1
旧K50-4-4	良	20.0	1.0	19.7	15.0	0.5	15.5	33.0	1.0	32.4	20.0	1.0	20.2	48.0	2.0	47.9
K50-4-4	良	30.0	1.0	29.9	15.0	0.5	15.4	33.0	1.0	32.5	20.0	1.0	20.4	48.0	2.0	47.9
K50-5-4	良	30.0	1.0	29.8	15.0	0.5	15.0	33.0	1.0	32.7	19.0	0.5	19.0	48.0	2.0	47.7
K50-6-4	良	30.0	1.0	30.0	15.0	0.5	15.2	33.0	1.0	33.4	20.0	1.0	20.0	48.0	2.0	48.6
K50-6-6S	良	16.0	0.5	15.6	12.0	0.5	12.1	35.0	1.0	35.8	17.0	0.5	16.8	47.0	2.0	47.9
旧K55-5-4	良	20.0	1.0	19.0	15.0	0.5	15.2	37.0	1.0	37.2	20.0	1.0	20.5	52.0	2.0	52.4
K55-5-4	良	30.0	1.0	30.0	15.0	0.5	15.0	37.0	1.0	36.9	20.0	1.0	20.7	52.0	2.0	51.9
K55-6-4	良	30.0	1.0	29.7	15.0	0.5	15.1	38.0	1.0	38.3	20.0	1.0	20.1	53.0	2.0	53.4
K60-6-4	良	30.0	1.0	29.9	15.0	0.5	15.2	43.0	2.0	43.3	20.0	1.0	20.1	58.0	2.0	58.5
K60-6-6JR	良	30.0	1.0	29.7	17.0	0.5	16.8	41.0	2.0	40.4	29.0	1.0	28.5	58.0	2.0	57.2
K60-6-6S	良	17.0	0.5	17.1	11.0	0.5	11.4	45.0	2.0	44.0	17.0	0.5	16.6	56.0	2.0	55.4
K65-6-4	良	30.0	1.0	30.0	15.0	0.5	15.3	48.0	2.0	48.2	20.0	1.0	20.1	63.0	2.5	63.5
K70-6-6	良	30.0	1.0	29.9	15.0	0.5	15.0	53.0	2.0	53.5	20.0	1.0	19.8	68.0	2.5	68.5
K70-6-6P	良	25.0	1.0	24.6	16.0	0.5	16.2	51.0	2.0	50.6	27.0	1.0	26.6	67.0	2.5	66.8
K70-10-10	良	18.0	0.5	17.7	9.0	0.5	9.1	58.0	2.0	57.7	22.0	1.0	22.1	67.0	2.5	66.8
K74-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.5	59.0	2.0	59.5	20.0	1.0	19.5	65.0	2.5	66.0
K80-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.4	57.0	2.0	57.3	22.0	1.0	21.9	63.0	2.5	63.7
K80-6-6	良	30.0	1.0	29.1	15.0	0.5	14.7	63.0	2.5	64.0	20.0	1.0	19.7	78.0	2.5	78.7
K80-6-6L	良	30.0	1.0	30.7	6.0	0.5	6.4	65.0	2.5	66.0	20.0	1.0	19.8	71.0	2.5	72.4
旧K80-10-6	良	20.0	1.0	20.4	8.0	0.5	8.4	69.0	2.5	68.9	10.0	0.5	9.5	77.0	2.5	77.3

種類	項目 外觀 形状	K1			K2			K3			K4			全長		
		寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.6	16.0	0.5	15.5	62.0	2.5	62.8	30.0	1.0	30.2	78.0	2.5	78.3
K80-10-10	良	18.0	0.5	18.1	9.0	0.5	9.1	68.0	2.5	67.6	22.0	1.0	22.1	77.0	2.5	76.7
K85-4-4L	良	30.0	1.0	30.1	6.0	0.5	6.5	64.0	2.5	63.7	22.0	1.0	21.6	70.0	2.5	70.2
旧K85-10-6	良	20.0	1.0	20.1	10.0	0.5	10.3	73.0	2.5	72.5	10.0	0.5	9.5	83.0	2.5	82.8
K85-10-6	良	30.0	1.0	29.8	16.0	0.5	15.9	67.0	2.5	67.5	30.0	1.0	30.1	83.0	2.5	83.4
K90-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.5	69.0	2.5	69.4	22.0	1.0	22.0	75.0	2.5	75.9
K90-4-4S	良	30.0	1.0	29.9	33.0	1.0	32.5	55.0	2.0	55.7	27.0	1.0	27.0	88.0	2.5	88.2
K90-6-4	良	30.0	1.0	29.8	15.0	0.5	14.6	70.0	2.5	70.5	23.0	1.0	22.5	85.0	2.5	85.1
K90-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.7	69.0	2.5	69.5	30.0	1.0	29.9	85.0	2.5	85.2
K90-10-6	良	20.0	1.0	19.2	15.0	0.5	15.3	70.0	2.5	70.8	23.0	1.0	23.3	85.0	2.5	86.1
K90-10-6L	良	30.0	1.0	29.2	15.0	0.5	15.4	70.0	2.5	70.7	23.0	1.0	23.3	85.0	2.5	86.1
K95-4-4S	良	30.0	1.0	29.6	33.0	1.0	32.8	60.0	2.5	60.1	27.0	1.0	26.9	93.0	3.0	92.9
K95-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	75.0	2.5	75.9	20.0	1.0	19.7	81.0	2.5	82.3
K95-6-6S	良	30.0	1.0	29.7	17.0	0.5	16.8	76.0	2.5	75.6	29.0	1.0	28.4	93.0	3.0	92.4
K95-10-6	良	30.0	1.0	29.8	20.0	1.0	20.1	70.0	2.5	70.2	23.0	1.0	22.7	90.0	3.0	90.3
K95-10-6H	良	30.0	1.0	30.9	16.0	0.5	15.6	74.0	2.5	75.3	30.0	1.0	29.9	90.0	3.0	90.9
K95-10-10	良	30.0	1.0	30.2	20.0	1.0	20.6	70.0	2.5	69.9	25.0	1.0	24.5	90.0	3.0	90.5
K95-13-6	良	22.0	1.0	22.0	20.0	1.0	19.8	70.0	2.5	70.6	23.0	1.0	23.4	90.0	3.0	90.4
K95-13-6L	良	30.0	1.0	30.1	20.0	1.0	19.6	70.0	2.5	70.7	23.0	1.0	23.1	90.0	3.0	90.3
K95-13-13	良	30.0	1.0	30.0	18.0	0.5	18.5	72.0	2.5	71.5	23.0	1.0	23.1	90.0	3.0	90.0
K100-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.8	79.0	2.5	79.5	30.0	1.0	30.1	95.0	3.0	95.3
K100-10-6P	良	25.0	1.0	24.8	15.0	0.5	15.5	81.0	2.5	80.1	25.0	1.0	24.4	96.0	3.0	95.6
K100-10-10	良	30.0	1.0	29.6	19.0	0.5	18.5	76.0	2.5	76.2	24.0	1.0	23.5	95.0	3.0	94.7
K100-13-10	良	22.5	1.0	22.6	15.0	0.5	14.8	75.0	2.5	76.6	41.5	2.0	41.4	90.0	3.0	91.4
K100-13-13	良	22.0	1.0	21.6	15.0	0.5	15.5	80.0	2.5	79.3	23.0	1.0	22.4	95.0	3.0	94.8
K105-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.6	83.0	2.5	82.8	26.0	1.0	26.5	100.0	3.0	99.4
K110-4-4S	良	30.0	1.0	29.9	43.0	2.0	43.1	65.0	2.5	64.6	27.0	1.0	26.9	108.0	3.0	107.7
K110-6-6H	良	25.0	1.0	24.5	17.0	0.5	16.5	88.0	2.5	87.7	27.0	1.0	26.4	105.0	3.0	104.2
K110-10-6	良	30.0	1.0	30.0	20.0	1.0	19.5	85.0	2.5	85.2	23.0	1.0	22.8	105.0	3.0	104.7
K110-10-6H	良	30.0	1.0	30.4	16.0	0.5	15.7	89.0	2.5	89.2	30.0	1.0	30.0	105.0	3.0	104.9
K110-10-10	良	30.0	1.0	30.4	20.0	1.0	20.5	82.0	2.5	82.1	24.0	1.0	24.3	102.0	3.0	102.6
K110-13-6	良	22.0	1.0	21.7	20.0	1.0	20.2	85.0	2.5	85.4	23.0	1.0	22.9	105.0	3.0	105.6
K110-13-6L	良	30.0	1.0	30.2	20.0	1.0	19.6	85.0	2.5	84.4	23.0	1.0	23.2	105.0	3.0	104.0
K110-13-13	良	30.0	1.0	30.6	20.0	1.0	19.8	84.0	2.5	83.5	23.0	1.0	23.1	104.0	3.0	103.3
K115-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	93.0	3.0	93.0	27.0	1.0	26.4	110.0	3.0	109.5
K120-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	98.0	3.0	97.6	27.0	1.0	26.3	115.0	3.0	114.1
K120-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	99.0	3.0	99.2	30.0	1.0	30.2	115.0	3.0	114.9
K120-10-10	良	30.0	1.0	30.6	20.0	1.0	19.9	95.0	3.0	94.9	24.0	1.0	24.3	115.0	3.0	114.8
K120-13-10	良	22.5	1.0	22.8	15.0	0.5	14.9	95.0	3.0	95.3	41.5	2.0	41.6	110.0	3.0	110.2
K120-13-13	良	30.0	1.0	30.0	20.0	1.0	19.7	95.0	3.0	96.0	23.0	1.0	23.4	115.0	3.0	115.7
K125-4-4S	良	30.0	1.0	29.5	48.0	2.0	47.2	75.0	2.5	74.4	27.0	1.0	27.0	123.0	3.0	121.6
K125-10-6	良	30.0	1.0	29.7	20.0	1.0	19.5	100.0	3.0	100.1	23.0	1.0	22.7	120.0	3.0	119.6
K125-13-6	良	22.0	1.0	22.1	20.0	1.0	20.3	100.0	3.0	99.1	23.0	1.0	23.4	120.0	3.0	119.4
K125-13-6L	良	30.0	1.0	30.1	20.0	1.0	20.4	100.0	3.0	99.0	23.0	1.0	23.1	120.0	3.0	119.4
K130-10-10	良	30.0	1.0	30.4	20.0	1.0	19.8	105.0	3.0	104.8	25.0	1.0	24.5	125.0	3.0	124.6
K130-13-10	良	22.5	1.0	22.7	15.0	0.5	14.6	105.0	3.0	105.0	41.5	2.0	41.6	120.0	3.0	119.6
K130-13-13	良	30.0	1.0	30.4	20.0	1.0	19.9	105.0	3.0	105.4	23.0	1.0	23.1	125.0	3.0	125.3
K135-10-6H	良	30.0	1.0	30.0	16.0	0.5	16.0	114.0	3.0	114.2	30.0	1.0	29.5	130.0	3.0	130.2
K145-10-6H	良	30.0	1.0	30.0	16.0	0.5	15.8	124.0	3.0	124.0	30.0	1.0	29.2	140.0	3.0	139.8
K150-10-10	良	30.0	1.0	30.5	20.0	1.0	20.5	125.0	3.0	124.0	25.0	1.0	24.3	145.0	3.0	144.5
K150-13-10	良	22.5	1.0	22.5	15.0	0.5	14.9	125.0	3.0	125.6	41.5	2.0	41.5	140.0	3.0	140.5
K150-13-13	良	30.0	1.0	30.6	20.0	1.0	19.9	125.0	3.0	124.6	23.0	1.0	23.1	145.0	3.0	144.5