

成形材料試験成績表

平成30年8月度



株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020


成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	962
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.3
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.83
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。


K形スピーサ 試験成績書

平成 30年 8月度



〒187-0043 東京都小平市学園東町1丁目7番14号

TEL:042-346-1100 FAX:042-346-2020

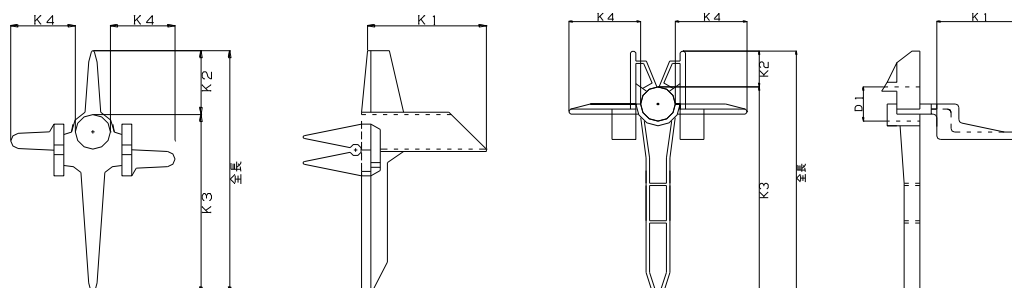

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.3	11.0	0.5	11.2	18.0	0.5	17.9	20.0	1.0	20.6	29.0	1.0	29.1
K30-3-3	良	30.0	1.0	29.7	11.0	0.5	11.3	18.0	0.5	18.0	20.0	1.0	20.8	29.0	1.0	29.3
旧K35-3-3	良	20.0	1.0	19.2	11.0	0.5	10.8	22.0	1.0	21.7	20.0	1.0	20.5	33.0	1.0	32.5
K35-3-3	良	30.0	1.0	29.9	11.0	0.5	11.1	22.0	1.0	21.7	20.0	1.0	20.7	33.0	1.0	32.8
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	11.3	27.0	1.0	27.0	20.0	1.0	20.4	38.0	1.0	38.3
K40-3-3	良	30.0	1.0	30.1	11.0	0.5	11.1	27.0	1.0	27.1	20.0	1.0	20.7	38.0	1.0	38.2
K40-5-4	良	30.0	1.0	29.7	15.0	0.5	15.1	23.0	1.0	22.8	19.0	0.5	19.3	38.0	1.0	37.9
旧K45-3-3	良	20.0	1.0	20.0	11.0	0.5	11.0	32.0	1.0	32.1	20.0	1.0	20.6	43.0	2.0	43.1
K45-3-3	良	30.0	1.0	30.0	11.0	0.5	11.5	32.0	1.0	32.2	20.0	1.0	20.6	43.0	2.0	43.7
K45-5-4	良	30.0	1.0	30.2	15.0	0.5	15.2	28.0	1.0	27.9	19.0	0.5	19.0	43.0	2.0	43.1
K45-6-4	良	30.0	1.0	29.8	15.0	0.5	14.9	29.0	1.0	29.3	20.0	1.0	20.3	44.0	2.0	44.2
旧K50-4-4	良	20.0	1.0	19.8	15.0	0.5	15.5	33.0	1.0	32.3	20.0	1.0	20.3	48.0	2.0	47.8
K50-4-4	良	30.0	1.0	29.9	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.3	48.0	2.0	47.7
K50-5-4	良	30.0	1.0	29.7	15.0	0.5	15.1	33.0	1.0	32.7	19.0	0.5	19.3	48.0	2.0	47.8
K50-6-4	良	30.0	1.0	29.8	15.0	0.5	15.3	33.0	1.0	33.5	20.0	1.0	20.1	48.0	2.0	48.8
K50-6-6S	良	16.0	0.5	15.6	12.0	0.5	11.7	35.0	1.0	36.0	17.0	0.5	16.7	47.0	2.0	47.7
旧K55-5-4	良	20.0	1.0	19.1	15.0	0.5	15.1	37.0	1.0	37.1	20.0	1.0	20.3	52.0	2.0	52.2
K55-5-4	良	30.0	1.0	30.0	15.0	0.5	14.7	37.0	1.0	37.1	20.0	1.0	20.7	52.0	2.0	51.8
K55-6-4	良	30.0	1.0	29.8	15.0	0.5	15.1	38.0	1.0	38.2	20.0	1.0	20.2	53.0	2.0	53.3
K60-6-4	良	30.0	1.0	29.9	15.0	0.5	15.3	43.0	2.0	43.2	20.0	1.0	20.0	58.0	2.0	58.5
K60-6-6JR	良	30.0	1.0	30.0	17.0	0.5	16.8	41.0	2.0	40.7	29.0	1.0	28.5	58.0	2.0	57.5
K60-6-6S	良	17.0	0.5	17.2	11.0	0.5	11.5	45.0	2.0	43.9	17.0	0.5	16.6	56.0	2.0	55.4
K65-6-4	良	30.0	1.0	29.8	15.0	0.5	15.3	48.0	2.0	48.3	20.0	1.0	20.1	63.0	2.5	63.6
K70-6-6	良	30.0	1.0	29.8	15.0	0.5	14.8	53.0	2.0	53.5	20.0	1.0	19.8	68.0	2.5	68.3
K70-6-6P	良	25.0	1.0	24.7	16.0	0.5	16.0	51.0	2.0	50.6	27.0	1.0	26.6	67.0	2.5	66.6
K70-10-10	良	18.0	0.5	17.9	9.0	0.5	9.1	58.0	2.0	57.8	22.0	1.0	22.0	67.0	2.5	66.9
K74-6-6L	良	30.0	1.0	30.7	6.0	0.5	6.4	59.0	2.0	59.3	20.0	1.0	19.7	65.0	2.5	65.7
K80-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.5	57.0	2.0	56.7	22.0	1.0	21.6	63.0	2.5	63.2
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.7	63.0	2.5	64.1	20.0	1.0	19.8	78.0	2.5	78.8
K80-6-6L	良	30.0	1.0	31.0	6.0	0.5	6.5	65.0	2.5	66.1	20.0	1.0	19.7	71.0	2.5	72.6
旧K80-10-6	良	20.0	1.0	19.9	8.0	0.5	8.3	69.0	2.5	68.5	10.0	0.5	9.5	77.0	2.5	76.8

項目 種類	外觀 形状	K1			K2			K3			K4			全長		
		寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.9	16.0	0.5	15.7	62.0	2.5	62.6	30.0	1.0	30.1	78.0	2.5	78.3
K80-10-10	良	18.0	0.5	17.9	9.0	0.5	9.3	68.0	2.5	67.7	22.0	1.0	22.0	77.0	2.5	77.0
K85-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.4	64.0	2.5	64.1	22.0	1.0	21.7	70.0	2.5	70.5
旧K85-10-6	良	20.0	1.0	20.2	10.0	0.5	10.2	73.0	2.5	72.7	10.0	0.5	9.5	83.0	2.5	82.9
K85-10-6	良	30.0	1.0	29.9	16.0	0.5	15.7	67.0	2.5	67.9	30.0	1.0	30.3	83.0	2.5	83.6
K90-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.5	69.0	2.5	68.9	22.0	1.0	21.9	75.0	2.5	75.4
K90-4-4S	良	30.0	1.0	30.0	33.0	1.0	32.5	55.0	2.0	55.2	27.0	1.0	26.8	88.0	2.5	87.7
K90-6-4	良	30.0	1.0	29.6	15.0	0.5	14.6	70.0	2.5	70.5	23.0	1.0	22.6	85.0	2.5	85.1
K90-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.6	69.0	2.5	69.7	30.0	1.0	30.1	85.0	2.5	85.3
K90-10-6	良	20.0	1.0	19.2	15.0	0.5	15.2	70.0	2.5	70.9	23.0	1.0	23.3	85.0	2.5	86.1
K90-10-6L	良	30.0	1.0	29.3	15.0	0.5	15.3	70.0	2.5	70.9	23.0	1.0	23.3	85.0	2.5	86.2
K95-4-4S	良	30.0	1.0	29.8	33.0	1.0	32.7	60.0	2.5	60.1	27.0	1.0	27.0	93.0	3.0	92.8
K95-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	75.0	2.5	75.6	20.0	1.0	19.7	81.0	2.5	82.0
K95-6-6S	良	30.0	1.0	29.9	17.0	0.5	16.9	76.0	2.5	75.8	29.0	1.0	28.3	93.0	3.0	92.7
K95-10-6	良	30.0	1.0	29.9	20.0	1.0	20.1	70.0	2.5	70.2	23.0	1.0	22.5	90.0	3.0	90.3
K95-10-6H	良	30.0	1.0	30.4	16.0	0.5	15.6	74.0	2.5	76.0	30.0	1.0	30.2	90.0	3.0	91.6
K95-10-10	良	30.0	1.0	30.4	20.0	1.0	20.1	70.0	2.5	69.6	25.0	1.0	24.5	90.0	3.0	89.7
K95-13-6	良	22.0	1.0	22.1	20.0	1.0	20.4	70.0	2.5	70.1	23.0	1.0	23.2	90.0	3.0	90.5
K95-13-6L	良	30.0	1.0	29.9	20.0	1.0	19.6	70.0	2.5	70.5	23.0	1.0	23.3	90.0	3.0	90.1
K95-13-13	良	30.0	1.0	30.3	18.0	0.5	18.5	72.0	2.5	71.7	23.0	1.0	23.3	90.0	3.0	90.2
K100-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.7	79.0	2.5	79.3	30.0	1.0	29.9	95.0	3.0	95.0
K100-10-6P	良	25.0	1.0	24.6	15.0	0.5	15.5	81.0	2.5	80.0	25.0	1.0	24.4	96.0	3.0	95.5
K100-10-10	良	30.0	1.0	29.7	19.0	0.5	18.5	76.0	2.5	76.6	24.0	1.0	23.7	95.0	3.0	95.1
K100-13-10	良	22.5	1.0	22.2	15.0	0.5	14.7	75.0	2.5	76.0	41.5	2.0	41.5	90.0	3.0	90.7
K100-13-13	良	22.0	1.0	21.7	15.0	0.5	15.5	80.0	2.5	79.6	23.0	1.0	22.3	95.0	3.0	95.1
K105-6-6H	良	25.0	1.0	24.8	17.0	0.5	16.6	83.0	2.5	83.0	26.0	1.0	26.3	100.0	3.0	99.6
K110-4-4S	良	30.0	1.0	29.8	43.0	2.0	42.7	65.0	2.5	64.1	27.0	1.0	26.6	108.0	3.0	106.8
K110-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.6	88.0	2.5	87.8	27.0	1.0	26.4	105.0	3.0	104.4
K110-10-6	良	30.0	1.0	29.9	20.0	1.0	19.2	85.0	2.5	85.3	23.0	1.0	22.5	105.0	3.0	104.5
K110-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.7	89.0	2.5	89.4	30.0	1.0	30.3	105.0	3.0	105.1
K110-10-10	良	30.0	1.0	30.5	20.0	1.0	19.4	82.0	2.5	81.8	24.0	1.0	24.4	102.0	3.0	101.2
K110-13-6	良	22.0	1.0	21.7	20.0	1.0	20.5	85.0	2.5	84.1	23.0	1.0	23.1	105.0	3.0	104.6
K110-13-6L	良	30.0	1.0	30.0	20.0	1.0	20.3	85.0	2.5	84.1	23.0	1.0	22.9	105.0	3.0	104.4
K110-13-13	良	30.0	1.0	30.4	20.0	1.0	19.9	84.0	2.5	83.7	23.0	1.0	23.1	104.0	3.0	103.6
K115-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	93.0	3.0	92.8	27.0	1.0	26.2	110.0	3.0	109.3
K120-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	98.0	3.0	98.2	27.0	1.0	26.4	115.0	3.0	114.8
K120-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.7	99.0	3.0	99.2	30.0	1.0	30.2	115.0	3.0	114.9
K120-10-10	良	30.0	1.0	30.5	20.0	1.0	20.2	95.0	3.0	94.9	24.0	1.0	24.1	115.0	3.0	115.1
K120-13-10	良	22.5	1.0	22.8	15.0	0.5	14.5	95.0	3.0	95.4	41.5	2.0	41.7	110.0	3.0	109.9
K120-13-13	良	30.0	1.0	30.4	20.0	1.0	19.7	95.0	3.0	95.2	23.0	1.0	23.1	115.0	3.0	114.9
K125-4-4S	良	30.0	1.0	30.0	48.0	2.0	47.2	75.0	2.5	74.4	27.0	1.0	26.9	123.0	3.0	121.6
K125-10-6	良	30.0	1.0	29.9	20.0	1.0	20.0	100.0	3.0	100.1	23.0	1.0	22.4	120.0	3.0	120.1
K125-13-6	良	22.0	1.0	22.1	20.0	1.0	20.2	100.0	3.0	99.9	23.0	1.0	23.0	120.0	3.0	120.1
K125-13-6L	良	30.0	1.0	29.9	20.0	1.0	20.1	100.0	3.0	99.2	23.0	1.0	23.0	120.0	3.0	119.3
K130-10-10	良	30.0	1.0	30.4	20.0	1.0	20.2	105.0	3.0	104.7	25.0	1.0	24.2	125.0	3.0	124.9
K130-13-10	良	22.5	1.0	22.7	15.0	0.5	14.9	105.0	3.0	106.1	41.5	2.0	41.5	120.0	3.0	121.0
K130-13-13	良	30.0	1.0	30.1	20.0	1.0	19.8	105.0	3.0	106.0	23.0	1.0	23.4	125.0	3.0	125.8
K135-10-6H	良	30.0	1.0	29.9	16.0	0.5	15.7	114.0	3.0	113.8	30.0	1.0	29.7	130.0	3.0	129.5
K145-10-6H	良	30.0	1.0	29.5	16.0	0.5	15.8	124.0	3.0	124.3	30.0	1.0	29.5	140.0	3.0	140.1
K150-10-10	良	30.0	1.0	30.0	20.0	1.0	19.9	125.0	3.0	124.7	25.0	1.0	24.4	145.0	3.0	144.6
K150-13-10	良	22.5	1.0	22.5	15.0	0.5	14.9	125.0	3.0	125.7	41.5	2.0	41.6	140.0	3.0	140.6
K150-13-13	良	30.0	1.0	30.4	20.0	1.0	19.6	125.0	3.0	123.9	23.0	1.0	22.9	145.0	3.0	143.5