

成形材料試験成績表

平成31年4月度



株式会社 未来樹脂



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	963
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.5
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.99
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。


K形スピーサ 試験成績書

平成 31年 4月度



〒187-0043 東京都小平市学園東町1丁目7番14号

TEL:042-346-1100 FAX:042-346-2020

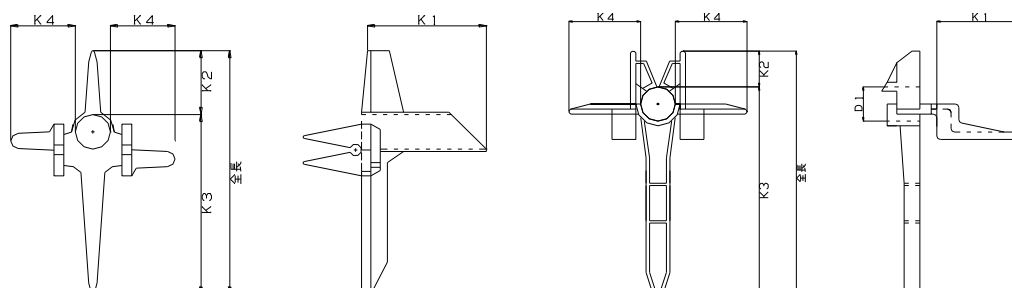

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.3	11.0	0.5	10.9	18.0	0.5	17.8	20.0	1.0	20.6	29.0	1.0	28.7
K30-3-3	良	30.0	1.0	29.9	11.0	0.5	11.0	18.0	0.5	17.9	20.0	1.0	20.7	29.0	1.0	28.9
旧K35-3-3	良	20.0	1.0	19.3	11.0	0.5	11.1	22.0	1.0	21.8	20.0	1.0	20.7	33.0	1.0	32.9
K35-3-3	良	30.0	1.0	29.7	11.0	0.5	11.1	22.0	1.0	21.9	20.0	1.0	20.8	33.0	1.0	33.0
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	10.9	27.0	1.0	26.9	20.0	1.0	20.5	38.0	1.0	37.8
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	11.1	27.0	1.0	27.1	20.0	1.0	20.7	38.0	1.0	38.2
K40-5-4	良	30.0	1.0	30.1	15.0	0.5	15.1	23.0	1.0	22.9	19.0	0.5	18.9	38.0	1.0	38.0
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	10.9	32.0	1.0	32.0	20.0	1.0	20.6	43.0	2.0	42.9
K45-3-3	良	30.0	1.0	29.9	11.0	0.5	11.0	32.0	1.0	32.2	20.0	1.0	20.5	43.0	2.0	43.2
K45-5-4	良	30.0	1.0	29.6	15.0	0.5	15.2	28.0	1.0	27.8	19.0	0.5	19.0	43.0	2.0	43.0
K45-6-4	良	30.0	1.0	29.7	15.0	0.5	15.2	29.0	1.0	29.0	20.0	1.0	20.2	44.0	2.0	44.2
旧K50-4-4	良	20.0	1.0	20.0	15.0	0.5	15.4	33.0	1.0	32.2	20.0	1.0	20.2	48.0	2.0	47.6
K50-4-4	良	30.0	1.0	29.8	15.0	0.5	15.4	33.0	1.0	32.4	20.0	1.0	20.4	48.0	2.0	47.8
K50-5-4	良	30.0	1.0	29.7	15.0	0.5	15.0	33.0	1.0	32.5	19.0	0.5	18.8	48.0	2.0	47.5
K50-6-4	良	30.0	1.0	30.0	15.0	0.5	15.3	33.0	1.0	33.5	20.0	1.0	20.1	48.0	2.0	48.8
K50-6-6S	良	16.0	0.5	15.6	12.0	0.5	11.9	35.0	1.0	36.0	17.0	0.5	16.7	47.0	2.0	47.9
旧K55-5-4	良	20.0	1.0	19.1	15.0	0.5	14.8	37.0	1.0	36.7	20.0	1.0	20.2	52.0	2.0	51.5
K55-5-4	良	30.0	1.0	29.8	15.0	0.5	14.9	37.0	1.0	37.5	20.0	1.0	20.6	52.0	2.0	52.4
K55-6-4	良	30.0	1.0	29.9	15.0	0.5	15.3	38.0	1.0	38.3	20.0	1.0	20.3	53.0	2.0	53.6
K60-6-4	良	30.0	1.0	29.9	15.0	0.5	15.2	43.0	2.0	43.3	20.0	1.0	20.2	58.0	2.0	58.5
K60-6-6JR	良	30.0	1.0	30.1	17.0	0.5	16.9	41.0	2.0	40.4	29.0	1.0	28.4	58.0	2.0	57.3
K60-6-6S	良	17.0	0.5	17.4	11.0	0.5	11.4	45.0	2.0	43.8	17.0	0.5	16.5	56.0	2.0	55.2
K65-6-4	良	30.0	1.0	29.8	15.0	0.5	15.4	48.0	2.0	48.2	20.0	1.0	20.2	63.0	2.5	63.6
K70-6-6	良	30.0	1.0	29.9	15.0	0.5	14.8	53.0	2.0	53.7	20.0	1.0	19.8	68.0	2.5	68.5
K70-6-6P	良	25.0	1.0	24.5	16.0	0.5	16.1	51.0	2.0	50.9	27.0	1.0	26.5	67.0	2.5	67.0
K70-10-10	良	18.0	0.5	17.7	9.0	0.5	9.2	58.0	2.0	57.6	22.0	1.0	22.1	67.0	2.5	66.8
K74-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.5	59.0	2.0	59.4	20.0	1.0	19.5	65.0	2.5	65.9
K80-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.4	57.0	2.0	56.5	22.0	1.0	21.7	63.0	2.5	62.9
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.6	63.0	2.5	64.1	20.0	1.0	20.0	78.0	2.5	78.7
K80-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.3	65.0	2.5	66.2	20.0	1.0	19.7	71.0	2.5	72.5
旧K80-10-6	良	20.0	1.0	19.9	8.0	0.5	8.4	69.0	2.5	68.9	10.0	0.5	9.5	77.0	2.5	77.3

種類	項目 外觀 形状	K1			K2			K3			K4			全長		
		寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.9	16.0	0.5	15.5	62.0	2.5	62.8	30.0	1.0	30.3	78.0	2.5	78.3
K80-10-10	良	18.0	0.5	17.9	9.0	0.5	9.1	68.0	2.5	67.5	22.0	1.0	21.9	77.0	2.5	76.6
K85-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.4	64.0	2.5	64.3	22.0	1.0	21.6	70.0	2.5	70.7
旧K85-10-6	良	20.0	1.0	20.3	10.0	0.5	10.3	73.0	2.5	72.8	10.0	0.5	9.5	83.0	2.5	83.1
K85-10-6	良	30.0	1.0	30.1	16.0	0.5	15.8	67.0	2.5	67.8	30.0	1.0	30.2	83.0	2.5	83.6
K90-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.4	69.0	2.5	69.5	22.0	1.0	21.8	75.0	2.5	75.9
K90-4-4S	良	30.0	1.0	29.9	33.0	1.0	32.4	55.0	2.0	55.5	27.0	1.0	27.0	88.0	2.5	87.9
K90-6-4	良	30.0	1.0	30.4	15.0	0.5	14.7	70.0	2.5	70.2	23.0	1.0	22.9	85.0	2.5	84.9
K90-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.6	69.0	2.5	69.7	30.0	1.0	30.0	85.0	2.5	85.3
K90-10-6	良	20.0	1.0	19.1	15.0	0.5	15.2	70.0	2.5	70.9	23.0	1.0	23.1	85.0	2.5	86.1
K90-10-6L	良	30.0	1.0	29.1	15.0	0.5	15.2	70.0	2.5	70.7	23.0	1.0	23.3	85.0	2.5	85.9
K95-4-4S	良	30.0	1.0	29.6	33.0	1.0	32.8	60.0	2.5	59.6	27.0	1.0	27.0	93.0	3.0	92.4
K95-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	75.0	2.5	75.6	20.0	1.0	19.7	81.0	2.5	82.0
K95-6-6S	良	30.0	1.0	29.4	17.0	0.5	16.9	76.0	2.5	75.7	29.0	1.0	28.4	93.0	3.0	92.6
K95-10-6	良	30.0	1.0	29.7	20.0	1.0	19.7	70.0	2.5	70.2	23.0	1.0	22.9	90.0	3.0	89.9
K95-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.5	74.0	2.5	75.0	30.0	1.0	30.1	90.0	3.0	90.5
K95-10-10	良	30.0	1.0	30.1	20.0	1.0	20.1	70.0	2.5	69.6	25.0	1.0	24.4	90.0	3.0	89.7
K95-13-6	良	22.0	1.0	22.1	20.0	1.0	19.9	70.0	2.5	70.7	23.0	1.0	23.2	90.0	3.0	90.6
K95-13-6L	良	30.0	1.0	30.1	20.0	1.0	20.3	70.0	2.5	70.3	23.0	1.0	23.3	90.0	3.0	90.6
K95-13-13	良	30.0	1.0	30.0	18.0	0.5	18.5	72.0	2.5	71.7	23.0	1.0	22.9	90.0	3.0	90.2
K100-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	79.0	2.5	79.0	30.0	1.0	30.3	95.0	3.0	94.7
K100-10-6P	良	25.0	1.0	24.5	15.0	0.5	15.5	81.0	2.5	80.4	25.0	1.0	25.0	96.0	3.0	95.9
K100-10-10	良	30.0	1.0	29.4	19.0	0.5	18.5	76.0	2.5	76.0	24.0	1.0	23.4	95.0	3.0	94.5
K100-13-10	良	22.5	1.0	22.4	15.0	0.5	14.6	75.0	2.5	76.5	41.5	2.0	41.7	90.0	3.0	91.1
K100-13-13	良	22.0	1.0	21.9	15.0	0.5	15.5	80.0	2.5	80.0	23.0	1.0	22.4	95.0	3.0	95.5
K105-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	83.0	2.5	82.6	26.0	1.0	26.3	100.0	3.0	99.2
K110-4-4S	良	30.0	1.0	29.6	43.0	2.0	43.2	65.0	2.5	65.1	27.0	1.0	26.9	108.0	3.0	108.3
K110-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	88.0	2.5	87.9	27.0	1.0	26.3	105.0	3.0	104.4
K110-10-6	良	30.0	1.0	30.0	20.0	1.0	19.8	85.0	2.5	85.2	23.0	1.0	22.2	105.0	3.0	105.0
K110-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.7	89.0	2.5	89.5	30.0	1.0	30.3	105.0	3.0	105.2
K110-10-10	良	30.0	1.0	30.2	20.0	1.0	20.1	82.0	2.5	81.1	24.0	1.0	24.0	102.0	3.0	101.2
K110-13-6	良	22.0	1.0	22.0	20.0	1.0	20.3	85.0	2.5	85.5	23.0	1.0	23.2	105.0	3.0	105.8
K110-13-6L	良	30.0	1.0	30.2	20.0	1.0	20.0	85.0	2.5	85.5	23.0	1.0	23.1	105.0	3.0	105.5
K110-13-13	良	30.0	1.0	30.6	20.0	1.0	19.9	84.0	2.5	83.8	23.0	1.0	23.1	104.0	3.0	103.7
K115-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	93.0	3.0	93.3	27.0	1.0	26.4	110.0	3.0	109.8
K120-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.6	98.0	3.0	98.2	27.0	1.0	26.2	115.0	3.0	114.8
K120-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.7	99.0	3.0	99.3	30.0	1.0	30.2	115.0	3.0	115.0
K120-10-10	良	30.0	1.0	30.7	20.0	1.0	19.8	95.0	3.0	94.6	24.0	1.0	24.3	115.0	3.0	114.4
K120-13-10	良	22.5	1.0	22.9	15.0	0.5	14.7	95.0	3.0	96.1	41.5	2.0	41.7	110.0	3.0	110.8
K120-13-13	良	30.0	1.0	30.1	20.0	1.0	20.1	95.0	3.0	95.5	23.0	1.0	23.2	115.0	3.0	115.6
K125-4-4S	良	30.0	1.0	29.7	48.0	2.0	47.3	75.0	2.5	74.8	27.0	1.0	26.6	123.0	3.0	122.1
K125-10-6	良	30.0	1.0	29.7	20.0	1.0	19.7	100.0	3.0	100.2	23.0	1.0	22.4	120.0	3.0	119.9
K125-13-6	良	22.0	1.0	21.9	20.0	1.0	20.1	100.0	3.0	99.3	23.0	1.0	23.2	120.0	3.0	119.4
K125-13-6L	良	30.0	1.0	29.9	20.0	1.0	20.3	100.0	3.0	99.2	23.0	1.0	23.5	120.0	3.0	119.5
K130-10-10	良	30.0	1.0	30.7	20.0	1.0	20.1	105.0	3.0	105.0	25.0	1.0	24.6	125.0	3.0	125.1
K130-13-10	良	22.5	1.0	22.6	15.0	0.5	14.7	105.0	3.0	106.1	41.5	2.0	41.7	120.0	3.0	120.8
K130-13-13	良	30.0	1.0	30.3	20.0	1.0	19.8	105.0	3.0	105.3	23.0	1.0	23.1	125.0	3.0	125.1
K135-10-6H	良	30.0	1.0	30.3	16.0	0.5	16.0	114.0	3.0	113.3	30.0	1.0	29.8	130.0	3.0	129.3
K145-10-6H	良	30.0	1.0	29.6	16.0	0.5	15.9	124.0	3.0	123.3	30.0	1.0	29.6	140.0	3.0	139.2
K150-10-10	良	30.0	1.0	30.6	20.0	1.0	20.0	125.0	3.0	124.2	25.0	1.0	24.4	145.0	3.0	144.2
K150-13-10	良	22.5	1.0	22.8	15.0	0.5	14.8	125.0	3.0	125.1	41.5	2.0	41.6	140.0	3.0	139.9
K150-13-13	良	30.0	1.0	30.7	20.0	1.0	20.6	125.0	3.0	124.8	23.0	1.0	22.9	145.0	3.0	145.4