

成形材料試験成績表

令和元年 5月度



株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	963
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.2
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.92
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビッカ軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書

令和元年 5月度




株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号

TEL:042-346-1100 FAX:042-346-2020

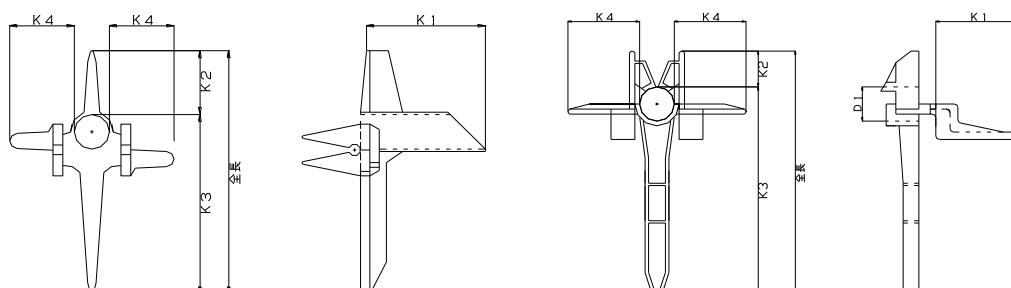

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.1	11.0	0.5	10.9	18.0	0.5	17.7	20.0	1.0	20.7	29.0	1.0	28.6
K30-3-3	良	30.0	1.0	29.8	11.0	0.5	11.2	18.0	0.5	17.9	20.0	1.0	20.8	29.0	1.0	29.1
旧K35-3-3	良	20.0	1.0	19.3	11.0	0.5	11.1	22.0	1.0	22.0	20.0	1.0	20.6	33.0	1.0	33.1
K35-3-3	良	30.0	1.0	29.9	11.0	0.5	11.2	22.0	1.0	22.0	20.0	1.0	20.9	33.0	1.0	33.2
旧K40-3-3	良	20.0	1.0	19.9	11.0	0.5	10.9	27.0	1.0	27.1	20.0	1.0	20.6	38.0	1.0	38.0
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	27.0	1.0	27.2	20.0	1.0	20.5	38.0	1.0	38.5
K40-5-4	良	30.0	1.0	30.1	15.0	0.5	15.1	23.0	1.0	22.9	19.0	0.5	19.1	38.0	1.0	38.0
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	11.1	32.0	1.0	32.0	20.0	1.0	20.5	43.0	2.0	43.1
K45-3-3	良	30.0	1.0	30.0	11.0	0.5	11.4	32.0	1.0	32.1	20.0	1.0	20.6	43.0	2.0	43.5
K45-5-4	良	30.0	1.0	30.0	15.0	0.5	15.2	28.0	1.0	28.0	19.0	0.5	19.1	43.0	2.0	43.2
K45-6-4	良	30.0	1.0	29.9	15.0	0.5	15.0	29.0	1.0	29.3	20.0	1.0	20.2	44.0	2.0	44.3
旧K50-4-4	良	20.0	1.0	20.2	15.0	0.5	15.5	33.0	1.0	32.2	20.0	1.0	20.4	48.0	2.0	47.7
K50-4-4	良	30.0	1.0	29.9	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.5	48.0	2.0	47.7
K50-5-4	良	30.0	1.0	30.1	15.0	0.5	15.1	33.0	1.0	32.8	19.0	0.5	18.9	48.0	2.0	47.9
K50-6-4	良	30.0	1.0	29.9	15.0	0.5	15.3	33.0	1.0	33.2	20.0	1.0	20.2	48.0	2.0	48.5
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.9	35.0	1.0	36.0	17.0	0.5	16.6	47.0	2.0	47.9
旧K55-5-4	良	20.0	1.0	19.2	15.0	0.5	15.1	37.0	1.0	37.3	20.0	1.0	20.3	52.0	2.0	52.4
K55-5-4	良	30.0	1.0	29.7	15.0	0.5	15.0	37.0	1.0	36.8	20.0	1.0	20.5	52.0	2.0	51.8
K55-6-4	良	30.0	1.0	29.8	15.0	0.5	15.1	38.0	1.0	38.3	20.0	1.0	20.3	53.0	2.0	53.4
K60-6-4	良	30.0	1.0	30.1	15.0	0.5	15.2	43.0	2.0	43.2	20.0	1.0	20.2	58.0	2.0	58.4
K60-6-6JR	良	30.0	1.0	29.3	17.0	0.5	17.1	41.0	2.0	40.5	29.0	1.0	28.4	58.0	2.0	57.6
K60-6-6S	良	17.0	0.5	17.2	11.0	0.5	11.4	45.0	2.0	43.8	17.0	0.5	16.8	56.0	2.0	55.2
K65-6-4	良	30.0	1.0	29.9	15.0	0.5	15.0	48.0	2.0	48.1	20.0	1.0	20.1	63.0	2.5	63.1
K70-6-6	良	30.0	1.0	29.7	15.0	0.5	14.7	53.0	2.0	54.1	20.0	1.0	20.1	68.0	2.5	68.8
K70-6-6P	良	25.0	1.0	24.8	16.0	0.5	16.3	51.0	2.0	50.5	27.0	1.0	26.7	67.0	2.5	66.8
K70-10-10	良	18.0	0.5	17.6	9.0	0.5	9.1	58.0	2.0	57.6	22.0	1.0	21.9	67.0	2.5	66.7
K74-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.3	59.0	2.0	59.6	20.0	1.0	19.6	65.0	2.5	65.9
K80-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.4	57.0	2.0	57.0	22.0	1.0	21.6	63.0	2.5	63.4
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.8	63.0	2.5	64.1	20.0	1.0	19.8	78.0	2.5	78.9
K80-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.3	65.0	2.5	66.2	20.0	1.0	19.6	71.0	2.5	72.5
旧K80-10-6	良	20.0	1.0	20.4	8.0	0.5	8.2	69.0	2.5	68.7	10.0	0.5	9.5	77.0	2.5	76.9

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.6	16.0	0.5	15.5	62.0	2.5	62.4	30.0	1.0	30.1	78.0	2.5	77.9
K80-10-10	良	18.0	0.5	17.8	9.0	0.5	9.1	68.0	2.5	67.6	22.0	1.0	22.1	77.0	2.5	76.7
K85-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.5	64.0	2.5	63.9	22.0	1.0	21.9	70.0	2.5	70.4
旧K85-10-6	良	20.0	1.0	20.5	10.0	0.5	10.3	73.0	2.5	72.3	10.0	0.5	9.5	83.0	2.5	82.6
K85-10-6	良	30.0	1.0	29.8	16.0	0.5	16.1	67.0	2.5	67.8	30.0	1.0	29.9	83.0	2.5	83.9
K90-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.4	69.0	2.5	69.2	22.0	1.0	21.5	75.0	2.5	75.6
K90-4-4S	良	30.0	1.0	29.6	33.0	1.0	32.8	55.0	2.0	55.1	27.0	1.0	26.5	88.0	2.5	87.9
K90-6-4	良	30.0	1.0	30.3	15.0	0.5	14.6	70.0	2.5	70.4	23.0	1.0	23.1	85.0	2.5	85.0
K90-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	69.0	2.5	69.7	30.0	1.0	30.0	85.0	2.5	85.4
K90-10-6	良	20.0	1.0	19.3	15.0	0.5	15.5	70.0	2.5	70.6	23.0	1.0	23.2	85.0	2.5	86.1
K90-10-6L	良	30.0	1.0	29.3	15.0	0.5	15.3	70.0	2.5	70.8	23.0	1.0	23.3	85.0	2.5	86.1
K95-4-4S	良	30.0	1.0	30.0	33.0	1.0	32.5	60.0	2.5	59.7	27.0	1.0	26.9	93.0	3.0	92.2
K95-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.4	75.0	2.5	75.9	20.0	1.0	19.6	81.0	2.5	82.3
K95-6-6S	良	30.0	1.0	29.7	17.0	0.5	17.1	76.0	2.5	75.4	29.0	1.0	28.3	93.0	3.0	92.5
K95-10-6	良	30.0	1.0	29.9	20.0	1.0	19.6	70.0	2.5	70.1	23.0	1.0	22.7	90.0	3.0	89.7
K95-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.5	74.0	2.5	75.6	30.0	1.0	30.0	90.0	3.0	91.1
K95-10-10	良	30.0	1.0	30.4	20.0	1.0	19.8	70.0	2.5	69.6	25.0	1.0	24.7	90.0	3.0	89.4
K95-13-6	良	22.0	1.0	21.9	20.0	1.0	20.1	70.0	2.5	70.6	23.0	1.0	23.4	90.0	3.0	90.7
K95-13-6L	良	30.0	1.0	29.9	20.0	1.0	20.4	70.0	2.5	70.4	23.0	1.0	23.4	90.0	3.0	90.8
K95-13-13	良	30.0	1.0	30.5	18.0	0.5	18.5	72.0	2.5	71.6	23.0	1.0	22.9	90.0	3.0	90.1
K100-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.7	79.0	2.5	79.2	30.0	1.0	30.2	95.0	3.0	94.9
K100-10-6P	良	25.0	1.0	24.6	15.0	0.5	15.5	81.0	2.5	80.6	25.0	1.0	24.8	96.0	3.0	96.1
K100-10-10	良	30.0	1.0	29.6	19.0	0.5	18.5	76.0	2.5	76.8	24.0	1.0	23.8	95.0	3.0	95.3
K100-13-10	良	22.5	1.0	22.8	15.0	0.5	14.7	75.0	2.5	76.4	41.5	2.0	41.6	90.0	3.0	91.1
K100-13-13	良	22.0	1.0	21.7	15.0	0.5	15.5	80.0	2.5	79.1	23.0	1.0	22.3	95.0	3.0	94.6
K105-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	83.0	2.5	82.6	26.0	1.0	26.2	100.0	3.0	99.2
K110-4-4S	良	30.0	1.0	29.7	43.0	2.0	43.1	65.0	2.5	64.9	27.0	1.0	26.7	108.0	3.0	108.0
K110-6-6H	良	25.0	1.0	24.8	17.0	0.5	16.5	88.0	2.5	87.5	27.0	1.0	26.4	105.0	3.0	104.0
K110-10-6	良	30.0	1.0	29.8	20.0	1.0	19.6	85.0	2.5	85.3	23.0	1.0	22.5	105.0	3.0	104.9
K110-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	89.0	2.5	89.3	30.0	1.0	30.0	105.0	3.0	105.0
K110-10-10	良	30.0	1.0	30.4	20.0	1.0	19.5	82.0	2.5	81.1	24.0	1.0	24.2	102.0	3.0	100.6
K110-13-6	良	22.0	1.0	22.1	20.0	1.0	19.5	85.0	2.5	84.8	23.0	1.0	23.5	105.0	3.0	104.3
K110-13-6L	良	30.0	1.0	30.0	20.0	1.0	19.5	85.0	2.5	84.5	23.0	1.0	23.4	105.0	3.0	104.0
K110-13-13	良	30.0	1.0	30.2	20.0	1.0	20.0	84.0	2.5	83.7	23.0	1.0	23.2	104.0	3.0	103.7
K115-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	93.0	3.0	93.0	27.0	1.0	26.4	110.0	3.0	109.6
K120-6-6H	良	25.0	1.0	24.8	17.0	0.5	16.6	98.0	3.0	97.6	27.0	1.0	26.3	115.0	3.0	114.2
K120-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.8	99.0	3.0	99.4	30.0	1.0	29.9	115.0	3.0	115.2
K120-10-10	良	30.0	1.0	30.5	20.0	1.0	20.0	95.0	3.0	94.5	24.0	1.0	24.1	115.0	3.0	114.5
K120-13-10	良	22.5	1.0	22.8	15.0	0.5	14.9	95.0	3.0	95.4	41.5	2.0	41.5	110.0	3.0	110.3
K120-13-13	良	30.0	1.0	30.1	20.0	1.0	20.1	95.0	3.0	95.7	23.0	1.0	23.4	115.0	3.0	115.8
K125-4-4S	良	30.0	1.0	29.8	48.0	2.0	47.4	75.0	2.5	74.8	27.0	1.0	26.8	123.0	3.0	122.2
K125-10-6	良	30.0	1.0	29.9	20.0	1.0	19.3	100.0	3.0	99.9	23.0	1.0	22.6	120.0	3.0	119.2
K125-13-6	良	22.0	1.0	22.2	20.0	1.0	20.2	100.0	3.0	99.7	23.0	1.0	23.3	120.0	3.0	119.9
K125-13-6L	良	30.0	1.0	29.7	20.0	1.0	20.1	100.0	3.0	99.0	23.0	1.0	23.0	120.0	3.0	119.1
K130-10-10	良	30.0	1.0	30.7	20.0	1.0	20.1	105.0	3.0	104.5	25.0	1.0	24.7	125.0	3.0	124.6
K130-13-10	良	22.5	1.0	22.7	15.0	0.5	15.0	105.0	3.0	105.1	41.5	2.0	41.6	120.0	3.0	120.1
K130-13-13	良	30.0	1.0	30.4	20.0	1.0	19.9	105.0	3.0	105.5	23.0	1.0	23.0	125.0	3.0	125.4
K135-10-6H	良	30.0	1.0	29.7	16.0	0.5	15.7	114.0	3.0	113.0	30.0	1.0	29.5	130.0	3.0	128.7
K145-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.7	124.0	3.0	124.2	30.0	1.0	29.2	140.0	3.0	139.9
K150-10-10	良	30.0	1.0	30.6	20.0	1.0	20.3	125.0	3.0	124.4	25.0	1.0	24.8	145.0	3.0	144.7
K150-13-10	良	22.5	1.0	22.9	15.0	0.5	14.7	125.0	3.0	125.0	41.5	2.0	41.5	140.0	3.0	139.7
K150-13-13	良	30.0	1.0	30.2	20.0	1.0	19.8	125.0	3.0	124.3	23.0	1.0	23.2	145.0	3.0	144.1