


成形材料試験成績表

令和元年 7月 度



〒187-0043 東京都小平市学園東町1丁目7番14号
TEL:042-346-1100 FAX:042-346-2020

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	963
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.2
引張降伏強さ	JIS K 7161	MPa	19.61 以上	28.03
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書

令和元年 7月度




株式会社 未来樹



〒187-0043 東京都小平市学園東町1丁目7番14号

TEL:042-346-1100 FAX:042-346-2020

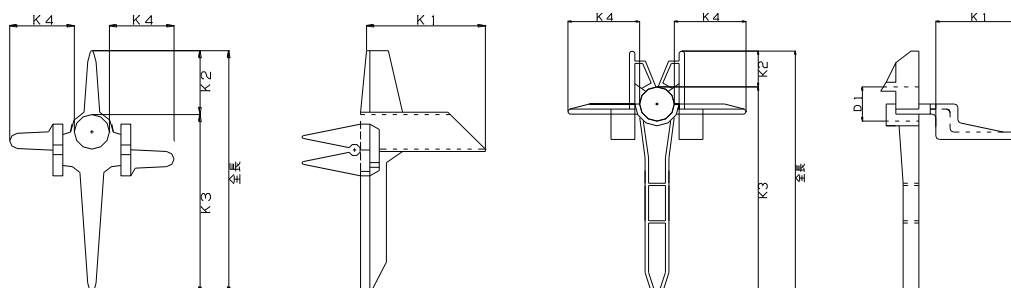

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.3	11.0	0.5	10.8	18.0	0.5	17.9	20.0	1.0	20.6	29.0	1.0	28.7
K30-3-3	良	30.0	1.0	30.0	11.0	0.5	11.0	18.0	0.5	17.9	20.0	1.0	20.7	29.0	1.0	28.9
旧K35-3-3	良	20.0	1.0	19.2	11.0	0.5	11.1	22.0	1.0	21.6	20.0	1.0	20.6	33.0	1.0	32.7
K35-3-3	良	30.0	1.0	29.8	11.0	0.5	11.1	22.0	1.0	22.1	20.0	1.0	20.8	33.0	1.0	33.2
旧K40-3-3	良	20.0	1.0	19.9	11.0	0.5	11.0	27.0	1.0	26.9	20.0	1.0	20.4	38.0	1.0	37.9
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	27.0	1.0	27.1	20.0	1.0	20.5	38.0	1.0	38.4
K40-5-4	良	30.0	1.0	29.5	15.0	0.5	15.0	23.0	1.0	22.8	19.0	0.5	18.9	38.0	1.0	37.8
旧K45-3-3	良	20.0	1.0	20.0	11.0	0.5	11.4	32.0	1.0	31.9	20.0	1.0	20.5	43.0	2.0	43.3
K45-3-3	良	30.0	1.0	30.1	11.0	0.5	11.4	32.0	1.0	32.1	20.0	1.0	20.5	43.0	2.0	43.5
K45-5-4	良	30.0	1.0	29.7	15.0	0.5	15.3	28.0	1.0	27.9	19.0	0.5	19.5	43.0	2.0	43.2
K45-6-4	良	30.0	1.0	29.9	15.0	0.5	15.2	29.0	1.0	29.1	20.0	1.0	20.3	44.0	2.0	44.3
旧K50-4-4	良	20.0	1.0	19.9	15.0	0.5	15.4	33.0	1.0	32.4	20.0	1.0	20.2	48.0	2.0	47.8
K50-4-4	良	30.0	1.0	29.8	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.5	48.0	2.0	47.7
K50-5-4	良	30.0	1.0	30.1	15.0	0.5	15.1	33.0	1.0	32.8	19.0	0.5	19.3	48.0	2.0	47.9
K50-6-4	良	30.0	1.0	29.9	15.0	0.5	15.3	33.0	1.0	33.2	20.0	1.0	20.2	48.0	2.0	48.5
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.8	35.0	1.0	35.8	17.0	0.5	16.6	47.0	2.0	47.6
旧K55-5-4	良	20.0	1.0	19.2	15.0	0.5	14.8	37.0	1.0	36.8	20.0	1.0	20.5	52.0	2.0	51.6
K55-5-4	良	30.0	1.0	29.8	15.0	0.5	15.0	37.0	1.0	37.4	20.0	1.0	20.6	52.0	2.0	52.4
K55-6-4	良	30.0	1.0	29.9	15.0	0.5	15.0	38.0	1.0	38.1	20.0	1.0	20.2	53.0	2.0	53.1
K60-6-4	良	30.0	1.0	30.0	15.0	0.5	15.4	43.0	2.0	43.2	20.0	1.0	20.3	58.0	2.0	58.6
K60-6-6JR	良	30.0	1.0	29.7	17.0	0.5	17.1	41.0	2.0	40.6	29.0	1.0	28.4	58.0	2.0	57.7
K60-6-6S	良	17.0	0.5	17.4	11.0	0.5	11.3	45.0	2.0	43.9	17.0	0.5	16.6	56.0	2.0	55.2
K65-6-4	良	30.0	1.0	29.8	15.0	0.5	15.1	48.0	2.0	48.2	20.0	1.0	20.1	63.0	2.5	63.3
K70-6-6	良	30.0	1.0	29.8	15.0	0.5	14.6	53.0	2.0	53.2	20.0	1.0	20.1	68.0	2.5	67.8
K70-6-6P	良	25.0	1.0	24.6	16.0	0.5	16.0	51.0	2.0	50.7	27.0	1.0	26.5	67.0	2.5	66.7
K70-10-10	良	18.0	0.5	17.9	9.0	0.5	9.1	58.0	2.0	57.7	22.0	1.0	22.0	67.0	2.5	66.8
K74-6-6L	良	30.0	1.0	31.0	6.0	0.5	6.4	59.0	2.0	59.5	20.0	1.0	19.6	65.0	2.5	65.9
K80-4-4L	良	30.0	1.0	30.1	6.0	0.5	6.5	57.0	2.0	56.9	22.0	1.0	21.8	63.0	2.5	63.4
K80-6-6	良	30.0	1.0	29.1	15.0	0.5	14.9	63.0	2.5	64.1	20.0	1.0	19.8	78.0	2.5	79.0
K80-6-6L	良	30.0	1.0	30.7	6.0	0.5	6.4	65.0	2.5	65.9	20.0	1.0	19.6	71.0	2.5	72.3
旧K80-10-6	良	20.0	1.0	20.2	8.0	0.5	8.3	69.0	2.5	68.8	10.0	0.5	9.5	77.0	2.5	77.1

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.6	16.0	0.5	15.8	62.0	2.5	62.7	30.0	1.0	30.1	78.0	2.5	78.5
K80-10-10	良	18.0	0.5	17.9	9.0	0.5	9.3	68.0	2.5	67.7	22.0	1.0	22.0	77.0	2.5	77.0
K85-4-4L	良	30.0	1.0	30.1	6.0	0.5	6.4	64.0	2.5	63.8	22.0	1.0	21.6	70.0	2.5	70.2
旧K85-10-6	良	20.0	1.0	20.1	10.0	0.5	10.3	73.0	2.5	72.8	10.0	0.5	9.5	83.0	2.5	83.1
K85-10-6	良	30.0	1.0	29.7	16.0	0.5	15.9	67.0	2.5	67.7	30.0	1.0	30.1	83.0	2.5	83.6
K90-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.5	69.0	2.5	69.4	22.0	1.0	21.6	75.0	2.5	75.9
K90-4-4S	良	30.0	1.0	29.8	33.0	1.0	32.6	55.0	2.0	55.3	27.0	1.0	27.0	88.0	2.5	87.9
K90-6-4	良	30.0	1.0	29.7	15.0	0.5	14.6	70.0	2.5	70.1	23.0	1.0	22.7	85.0	2.5	84.7
K90-10-6H	良	30.0	1.0	31.0	16.0	0.5	15.7	69.0	2.5	69.9	30.0	1.0	30.1	85.0	2.5	85.6
K90-10-6	良	20.0	1.0	19.4	15.0	0.5	15.4	70.0	2.5	70.5	23.0	1.0	23.2	85.0	2.5	85.9
K90-10-6L	良	30.0	1.0	29.2	15.0	0.5	15.1	70.0	2.5	70.8	23.0	1.0	23.5	85.0	2.5	85.9
K95-4-4S	良	30.0	1.0	29.8	33.0	1.0	32.5	60.0	2.5	59.5	27.0	1.0	26.5	93.0	3.0	92.0
K95-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.3	75.0	2.5	75.6	20.0	1.0	19.6	81.0	2.5	81.9
K95-6-6S	良	30.0	1.0	29.8	17.0	0.5	16.7	76.0	2.5	75.5	29.0	1.0	28.2	93.0	3.0	92.2
K95-10-6	良	30.0	1.0	29.9	20.0	1.0	19.5	70.0	2.5	70.6	23.0	1.0	22.7	90.0	3.0	90.1
K95-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.8	74.0	2.5	75.2	30.0	1.0	29.9	90.0	3.0	91.0
K95-10-10	良	30.0	1.0	30.0	20.0	1.0	20.1	70.0	2.5	69.5	25.0	1.0	24.4	90.0	3.0	89.6
K95-13-6	良	22.0	1.0	21.9	20.0	1.0	20.2	70.0	2.5	70.8	23.0	1.0	23.0	90.0	3.0	91.0
K95-13-6L	良	30.0	1.0	30.0	20.0	1.0	19.5	70.0	2.5	71.0	23.0	1.0	23.4	90.0	3.0	90.5
K95-13-13	良	30.0	1.0	29.9	18.0	0.5	18.5	72.0	2.5	71.4	23.0	1.0	22.9	90.0	3.0	89.9
K100-10-6H	良	30.0	1.0	30.9	16.0	0.5	15.8	79.0	2.5	79.2	30.0	1.0	30.0	95.0	3.0	95.0
K100-10-6P	良	25.0	1.0	25.1	15.0	0.5	15.5	81.0	2.5	80.6	25.0	1.0	24.3	96.0	3.0	96.1
K100-10-10	良	30.0	1.0	29.5	19.0	0.5	18.5	76.0	2.5	76.1	24.0	1.0	23.6	95.0	3.0	94.6
K100-13-10	良	22.5	1.0	22.9	15.0	0.5	14.9	75.0	2.5	76.6	41.5	2.0	41.7	90.0	3.0	91.5
K100-13-13	良	22.0	1.0	21.6	15.0	0.5	15.5	80.0	2.5	79.6	23.0	1.0	22.3	95.0	3.0	95.1
K105-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	83.0	2.5	83.2	26.0	1.0	26.5	100.0	3.0	99.7
K110-4-4S	良	30.0	1.0	30.0	43.0	2.0	43.4	65.0	2.5	64.4	27.0	1.0	26.8	108.0	3.0	107.8
K110-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	88.0	2.5	88.2	27.0	1.0	26.4	105.0	3.0	104.7
K110-10-6	良	30.0	1.0	29.7	20.0	1.0	20.0	85.0	2.5	85.3	23.0	1.0	22.3	105.0	3.0	105.3
K110-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.7	89.0	2.5	88.9	30.0	1.0	30.1	105.0	3.0	104.6
K110-10-10	良	30.0	1.0	30.4	20.0	1.0	19.5	82.0	2.5	81.3	24.0	1.0	24.2	102.0	3.0	100.8
K110-13-6	良	22.0	1.0	21.7	20.0	1.0	19.9	85.0	2.5	84.1	23.0	1.0	23.2	105.0	3.0	104.0
K110-13-6L	良	30.0	1.0	30.1	20.0	1.0	19.8	85.0	2.5	85.3	23.0	1.0	22.9	105.0	3.0	105.1
K110-13-13	良	30.0	1.0	30.8	20.0	1.0	19.9	84.0	2.5	84.0	23.0	1.0	23.1	104.0	3.0	103.9
K115-6-6H	良	25.0	1.0	24.5	17.0	0.5	16.5	93.0	3.0	92.9	27.0	1.0	26.3	110.0	3.0	109.4
K120-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	98.0	3.0	97.8	27.0	1.0	26.3	115.0	3.0	114.3
K120-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	99.0	3.0	99.0	30.0	1.0	29.9	115.0	3.0	114.7
K120-10-10	良	30.0	1.0	30.4	20.0	1.0	20.2	95.0	3.0	94.6	24.0	1.0	24.1	115.0	3.0	114.8
K120-13-10	良	22.5	1.0	22.8	15.0	0.5	14.9	95.0	3.0	96.3	41.5	2.0	41.5	110.0	3.0	111.2
K120-13-13	良	30.0	1.0	30.1	20.0	1.0	19.7	95.0	3.0	95.3	23.0	1.0	23.2	115.0	3.0	115.0
K125-4-4S	良	30.0	1.0	29.4	48.0	2.0	47.2	75.0	2.5	74.5	27.0	1.0	26.8	123.0	3.0	121.7
K125-10-6	良	30.0	1.0	29.7	20.0	1.0	19.4	100.0	3.0	99.7	23.0	1.0	22.4	120.0	3.0	119.1
K125-13-6	良	22.0	1.0	21.9	20.0	1.0	19.7	100.0	3.0	99.5	23.0	1.0	23.0	120.0	3.0	119.2
K125-13-6L	良	30.0	1.0	30.1	20.0	1.0	20.3	100.0	3.0	99.3	23.0	1.0	23.0	120.0	3.0	119.6
K130-10-10	良	30.0	1.0	30.5	20.0	1.0	19.9	105.0	3.0	104.9	25.0	1.0	24.5	125.0	3.0	124.8
K130-13-10	良	22.5	1.0	22.8	15.0	0.5	14.7	105.0	3.0	105.7	41.5	2.0	41.4	120.0	3.0	120.4
K130-13-13	良	30.0	1.0	30.1	20.0	1.0	20.0	105.0	3.0	105.9	23.0	1.0	23.1	125.0	3.0	125.9
K135-10-6H	良	30.0	1.0	30.2	16.0	0.5	15.5	114.0	3.0	114.0	30.0	1.0	29.3	130.0	3.0	129.5
K145-10-6H	良	30.0	1.0	30.0	16.0	0.5	15.9	124.0	3.0	123.7	30.0	1.0	29.5	140.0	3.0	139.6
K150-10-10	良	30.0	1.0	30.2	20.0	1.0	20.2	125.0	3.0	124.4	25.0	1.0	24.2	145.0	3.0	144.6
K150-13-10	良	22.5	1.0	22.8	15.0	0.5	14.5	125.0	3.0	125.1	41.5	2.0	41.4	140.0	3.0	139.6
K150-13-13	良	30.0	1.0	30.1	20.0	1.0	20.1	125.0	3.0	124.4	23.0	1.0	22.9	145.0	3.0	144.5