

成形材料試験成績表

令和2年9月度



株式会社 未来樹



〒181-0013 東京都三鷹市下連雀3-38-4
三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	960
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.3
引張降伏強さ	JIS K 7161	MPa	19.61 以上	28.02
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書


令和 2年 9月 度



株式会社 未来樹

〒181-0013 東京都三鷹市下連雀 3-38-4
三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021

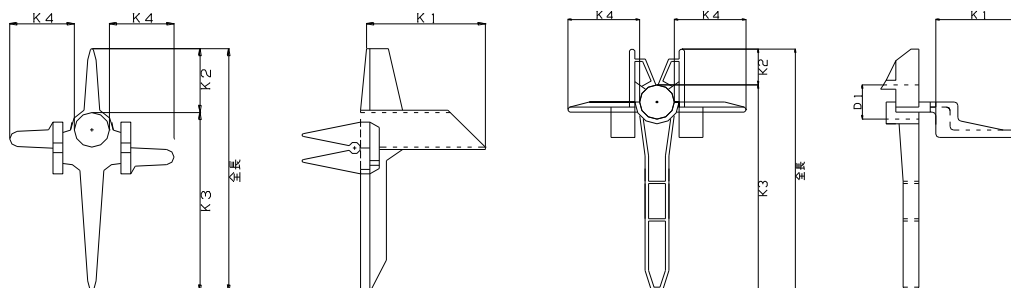

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.3	11.0	0.5	10.9	18.0	0.5	17.9	20.0	1.0	20.6	29.0	1.0	28.8
K30-3-3	良	30.0	1.0	29.8	11.0	0.5	10.9	18.0	0.5	17.9	20.0	1.0	20.7	29.0	1.0	28.8
旧K35-3-3	良	20.0	1.0	19.1	11.0	0.5	11.0	22.0	1.0	21.8	20.0	1.0	20.6	33.0	1.0	32.8
K35-3-3	良	30.0	1.0	29.8	11.0	0.5	10.9	22.0	1.0	22.0	20.0	1.0	20.7	33.0	1.0	32.9
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	11.3	27.0	1.0	26.9	20.0	1.0	20.6	38.0	1.0	38.2
K40-3-3	良	30.0	1.0	29.9	11.0	0.5	11.4	27.0	1.0	27.2	20.0	1.0	20.6	38.0	1.0	38.6
K40-5-4	良	30.0	1.0	29.6	15.0	0.5	15.0	23.0	1.0	22.8	19.0	0.5	19.0	38.0	1.0	37.8
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	11.3	32.0	1.0	32.0	20.0	1.0	20.5	43.0	2.0	43.3
K45-3-3	良	30.0	1.0	30.1	11.0	0.5	11.3	32.0	1.0	32.4	20.0	1.0	20.7	43.0	2.0	43.7
K45-5-4	良	30.0	1.0	29.8	15.0	0.5	15.2	28.0	1.0	28.1	19.0	0.5	19.4	43.0	2.0	43.3
K45-6-4	良	30.0	1.0	29.7	15.0	0.5	15.4	29.0	1.0	29.2	20.0	1.0	20.3	44.0	2.0	44.6
旧K50-4-4	良	20.0	1.0	19.8	15.0	0.5	15.5	33.0	1.0	32.4	20.0	1.0	20.4	48.0	2.0	47.9
K50-4-4	良	30.0	1.0	29.9	15.0	0.5	15.4	33.0	1.0	32.4	20.0	1.0	20.3	48.0	2.0	47.8
K50-5-4	良	30.0	1.0	29.8	15.0	0.5	15.1	33.0	1.0	32.6	19.0	0.5	18.9	48.0	2.0	47.7
K50-6-4	良	30.0	1.0	29.9	15.0	0.5	15.4	33.0	1.0	33.1	20.0	1.0	20.0	48.0	2.0	48.5
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.9	35.0	1.0	35.9	17.0	0.5	16.7	47.0	2.0	47.8
旧K55-5-4	良	20.0	1.0	19.2	15.0	0.5	14.7	37.0	1.0	37.6	20.0	1.0	20.5	52.0	2.0	52.3
K55-5-4	良	30.0	1.0	29.8	15.0	0.5	14.9	37.0	1.0	37.4	20.0	1.0	20.4	52.0	2.0	52.3
K55-6-4	良	30.0	1.0	29.8	15.0	0.5	15.2	38.0	1.0	38.3	20.0	1.0	20.1	53.0	2.0	53.5
K60-6-4	良	30.0	1.0	30.0	15.0	0.5	15.1	43.0	2.0	43.1	20.0	1.0	20.2	58.0	2.0	58.2
K60-6-6JR	良	30.0	1.0	30.1	17.0	0.5	17.2	41.0	2.0	40.6	29.0	1.0	28.2	58.0	2.0	57.8
K60-6-6S	良	17.0	0.5	17.2	11.0	0.5	11.3	45.0	2.0	43.6	17.0	0.5	16.7	56.0	2.0	54.9
K65-6-4	良	30.0	1.0	29.8	15.0	0.5	15.1	48.0	2.0	48.1	20.0	1.0	20.2	63.0	2.5	63.2
K70-6-6	良	30.0	1.0	29.9	15.0	0.5	14.6	53.0	2.0	53.6	20.0	1.0	20.2	68.0	2.5	68.2
K70-6-6P	良	25.0	1.0	24.6	16.0	0.5	16.1	51.0	2.0	50.7	27.0	1.0	26.7	67.0	2.5	66.8
K70-10-10	良	18.0	0.5	17.6	9.0	0.5	9.2	58.0	2.0	57.6	22.0	1.0	22.0	67.0	2.5	66.8
K74-6-6L	良	30.0	1.0	31.0	6.0	0.5	6.4	59.0	2.0	59.3	20.0	1.0	19.6	65.0	2.5	65.7
K80-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.4	57.0	2.0	57.0	22.0	1.0	21.8	63.0	2.5	63.4
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.6	63.0	2.5	64.0	20.0	1.0	19.8	78.0	2.5	78.6
K80-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.4	65.0	2.5	66.1	20.0	1.0	19.8	71.0	2.5	72.5
旧K80-10-6	良	20.0	1.0	20.5	8.0	0.5	8.4	69.0	2.5	68.9	10.0	0.5	9.5	77.0	2.5	77.3

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.5	16.0	0.5	15.6	62.0	2.5	62.5	30.0	1.0	29.9	78.0	2.5	78.1
K80-10-10	良	18.0	0.5	17.9	9.0	0.5	9.3	68.0	2.5	67.7	22.0	1.0	22.0	77.0	2.5	77.0
K85-4-4L	良	30.0	1.0	29.8	6.0	0.5	6.4	64.0	2.5	64.0	22.0	1.0	21.5	70.0	2.5	70.4
旧K85-10-6	良	20.0	1.0	19.9	10.0	0.5	10.2	73.0	2.5	72.5	10.0	0.5	9.5	83.0	2.5	82.7
K85-10-6	良	30.0	1.0	29.7	16.0	0.5	16.1	67.0	2.5	67.8	30.0	1.0	30.0	83.0	2.5	83.9
K90-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.5	69.0	2.5	68.7	22.0	1.0	21.8	75.0	2.5	75.2
K90-4-4S	良	30.0	1.0	29.5	33.0	1.0	32.7	55.0	2.0	55.0	27.0	1.0	26.8	88.0	2.5	87.7
K90-6-4	良	30.0	1.0	29.6	15.0	0.5	14.6	70.0	2.5	70.1	23.0	1.0	23.0	85.0	2.5	84.7
K90-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.7	69.0	2.5	69.6	30.0	1.0	30.1	85.0	2.5	85.3
K90-10-6	良	20.0	1.0	19.3	15.0	0.5	15.3	70.0	2.5	70.9	23.0	1.0	23.1	85.0	2.5	86.2
K90-10-6L	良	30.0	1.0	29.2	15.0	0.5	15.3	70.0	2.5	70.8	23.0	1.0	23.5	85.0	2.5	86.1
K95-4-4S	良	30.0	1.0	29.5	33.0	1.0	32.3	60.0	2.5	60.4	27.0	1.0	26.8	93.0	3.0	92.7
K95-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.4	75.0	2.5	75.8	20.0	1.0	19.8	81.0	2.5	82.2
K95-6-6S	良	30.0	1.0	29.8	17.0	0.5	16.8	76.0	2.5	75.5	29.0	1.0	28.3	93.0	3.0	92.3
K95-10-6	良	30.0	1.0	29.7	20.0	1.0	19.5	70.0	2.5	70.8	23.0	1.0	22.3	90.0	3.0	90.3
K95-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.7	74.0	2.5	75.0	30.0	1.0	29.9	90.0	3.0	90.7
K95-10-10	良	30.0	1.0	30.2	20.0	1.0	19.6	70.0	2.5	69.5	25.0	1.0	24.2	90.0	3.0	89.1
K95-13-6	良	22.0	1.0	22.0	20.0	1.0	19.6	70.0	2.5	70.8	23.0	1.0	23.3	90.0	3.0	90.4
K95-13-6L	良	30.0	1.0	29.9	20.0	1.0	19.6	70.0	2.5	70.6	23.0	1.0	23.1	90.0	3.0	90.2
K95-13-13	良	30.0	1.0	30.0	18.0	0.5	18.5	72.0	2.5	71.4	23.0	1.0	23.0	90.0	3.0	89.9
K100-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.5	79.0	2.5	78.9	30.0	1.0	30.1	95.0	3.0	94.4
K100-10-6P	良	25.0	1.0	24.9	15.0	0.5	15.5	81.0	2.5	80.4	25.0	1.0	24.9	96.0	3.0	95.9
K100-10-10	良	30.0	1.0	29.7	19.0	0.5	18.5	76.0	2.5	76.3	24.0	1.0	23.5	95.0	3.0	94.8
K100-13-10	良	22.5	1.0	22.4	15.0	0.5	14.6	75.0	2.5	76.0	41.5	2.0	41.5	90.0	3.0	90.6
K100-13-13	良	22.0	1.0	21.6	15.0	0.5	15.5	80.0	2.5	79.5	23.0	1.0	22.5	95.0	3.0	95.0
K105-6-6H	良	25.0	1.0	24.8	17.0	0.5	16.6	83.0	2.5	83.4	26.0	1.0	26.3	100.0	3.0	100.0
K110-4-4S	良	30.0	1.0	29.6	43.0	2.0	43.3	65.0	2.5	65.2	27.0	1.0	27.0	108.0	3.0	108.5
K110-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	88.0	2.5	88.1	27.0	1.0	26.5	105.0	3.0	104.6
K110-10-6	良	30.0	1.0	29.8	20.0	1.0	19.9	85.0	2.5	84.5	23.0	1.0	22.3	105.0	3.0	104.4
K110-10-6H	良	30.0	1.0	31.0	16.0	0.5	15.7	89.0	2.5	89.2	30.0	1.0	30.1	105.0	3.0	104.9
K110-10-10	良	30.0	1.0	30.3	20.0	1.0	20.1	82.0	2.5	81.4	24.0	1.0	24.1	102.0	3.0	101.5
K110-13-6	良	22.0	1.0	21.8	20.0	1.0	20.4	85.0	2.5	84.6	23.0	1.0	23.0	105.0	3.0	105.0
K110-13-6L	良	30.0	1.0	29.9	20.0	1.0	19.9	85.0	2.5	84.7	23.0	1.0	23.1	105.0	3.0	104.6
K110-13-13	良	30.0	1.0	30.6	20.0	1.0	19.9	84.0	2.5	84.0	23.0	1.0	23.2	104.0	3.0	103.9
K115-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	93.0	3.0	93.2	27.0	1.0	26.4	110.0	3.0	109.7
K120-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	98.0	3.0	98.3	27.0	1.0	26.4	115.0	3.0	114.9
K120-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.6	99.0	3.0	99.5	30.0	1.0	30.1	115.0	3.0	115.1
K120-10-10	良	30.0	1.0	30.8	20.0	1.0	19.6	95.0	3.0	94.7	24.0	1.0	24.0	115.0	3.0	114.3
K120-13-10	良	22.5	1.0	22.6	15.0	0.5	14.6	95.0	3.0	95.5	41.5	2.0	41.6	110.0	3.0	110.1
K120-13-13	良	30.0	1.0	30.3	20.0	1.0	19.8	95.0	3.0	95.4	23.0	1.0	23.4	115.0	3.0	115.2
K125-4-4S	良	30.0	1.0	29.8	48.0	2.0	47.1	75.0	2.5	74.8	27.0	1.0	27.0	123.0	3.0	121.9
K125-10-6	良	30.0	1.0	29.6	20.0	1.0	19.2	100.0	3.0	99.4	23.0	1.0	22.4	120.0	3.0	118.6
K125-13-6	良	22.0	1.0	22.0	20.0	1.0	19.5	100.0	3.0	98.7	23.0	1.0	23.0	120.0	3.0	118.2
K125-13-6L	良	30.0	1.0	29.9	20.0	1.0	19.8	100.0	3.0	99.8	23.0	1.0	23.0	120.0	3.0	119.6
K130-10-10	良	30.0	1.0	30.4	20.0	1.0	20.5	105.0	3.0	104.9	25.0	1.0	24.3	125.0	3.0	125.4
K130-13-10	良	22.5	1.0	23.0	15.0	0.5	14.8	105.0	3.0	106.3	41.5	2.0	41.6	120.0	3.0	121.1
K130-13-13	良	30.0	1.0	30.4	20.0	1.0	20.1	105.0	3.0	105.5	23.0	1.0	23.2	125.0	3.0	125.6
K135-10-6H	良	30.0	1.0	30.0	16.0	0.5	15.6	114.0	3.0	113.6	30.0	1.0	29.5	130.0	3.0	129.2
K145-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.5	124.0	3.0	123.2	30.0	1.0	30.0	140.0	3.0	138.7
K150-10-10	良	30.0	1.0	30.3	20.0	1.0	20.3	125.0	3.0	124.4	25.0	1.0	24.4	145.0	3.0	144.7
K150-13-10	良	22.5	1.0	22.9	15.0	0.5	15.0	125.0	3.0	125.6	41.5	2.0	41.7	140.0	3.0	140.6
K150-13-13	良	30.0	1.0	29.9	20.0	1.0	19.7	125.0	3.0	124.2	23.0	1.0	23.3	145.0	3.0	143.9