

成形材料試験成績表

令和2年11月度



株式会社 未来樹



〒181-0013 東京都三鷹市下連雀3-38-4
三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	962
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.0
引張降伏強さ	JIS K 7161	MPa	19.61 以上	28.00
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書


令和 2年11月度



株式会社 未来樹

〒181-0013 東京都三鷹市下連雀 3-38-4
三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021

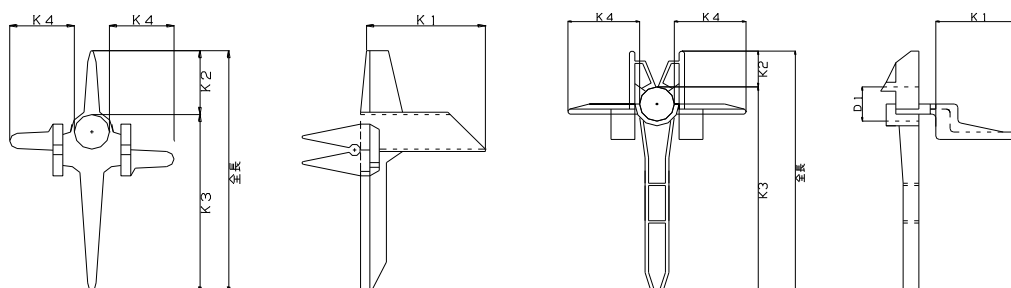

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値	寸法	許容差	測定値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.2	11.0	0.5	11.2	18.0	0.5	17.9	20.0	1.0	20.7	29.0	1.0	29.1
K30-3-3	良	30.0	1.0	29.7	11.0	0.5	11.2	18.0	0.5	17.9	20.0	1.0	20.9	29.0	1.0	29.1
旧K35-3-3	良	20.0	1.0	19.1	11.0	0.5	11.1	22.0	1.0	21.9	20.0	1.0	20.7	33.0	1.0	33.0
K35-3-3	良	30.0	1.0	29.8	11.0	0.5	11.2	22.0	1.0	21.8	20.0	1.0	20.8	33.0	1.0	33.0
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	11.1	27.0	1.0	27.1	20.0	1.0	20.5	38.0	1.0	38.2
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	10.9	27.0	1.0	27.2	20.0	1.0	20.7	38.0	1.0	38.1
K40-5-4	良	30.0	1.0	30.0	15.0	0.5	15.0	23.0	1.0	23.0	19.0	0.5	19.0	38.0	1.0	38.0
旧K45-3-3	良	20.0	1.0	20.0	11.0	0.5	11.0	32.0	1.0	32.1	20.0	1.0	20.5	43.0	2.0	43.1
K45-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	32.0	1.0	32.4	20.0	1.0	20.6	43.0	2.0	43.7
K45-5-4	良	30.0	1.0	29.8	15.0	0.5	15.2	28.0	1.0	28.1	19.0	0.5	19.3	43.0	2.0	43.3
K45-6-4	良	30.0	1.0	29.8	15.0	0.5	15.1	29.0	1.0	29.3	20.0	1.0	20.1	44.0	2.0	44.4
旧K50-4-4	良	20.0	1.0	20.1	15.0	0.5	15.5	33.0	1.0	32.3	20.0	1.0	20.1	48.0	2.0	47.8
K50-4-4	良	30.0	1.0	29.8	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.3	48.0	2.0	47.7
K50-5-4	良	30.0	1.0	29.5	15.0	0.5	15.2	33.0	1.0	32.5	19.0	0.5	19.2	48.0	2.0	47.7
K50-6-4	良	30.0	1.0	30.1	15.0	0.5	15.4	33.0	1.0	33.2	20.0	1.0	20.1	48.0	2.0	48.6
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.8	35.0	1.0	35.9	17.0	0.5	16.8	47.0	2.0	47.7
旧K55-5-4	良	20.0	1.0	19.2	15.0	0.5	14.9	37.0	1.0	36.6	20.0	1.0	20.3	52.0	2.0	51.5
K55-5-4	良	30.0	1.0	29.9	15.0	0.5	14.8	37.0	1.0	36.8	20.0	1.0	20.5	52.0	2.0	51.6
K55-6-4	良	30.0	1.0	29.9	15.0	0.5	14.9	38.0	1.0	38.1	20.0	1.0	20.0	53.0	2.0	53.0
K60-6-4	良	30.0	1.0	30.0	15.0	0.5	15.2	43.0	2.0	43.3	20.0	1.0	20.2	58.0	2.0	58.5
K60-6-6JR	良	30.0	1.0	29.5	17.0	0.5	17.2	41.0	2.0	40.5	29.0	1.0	28.5	58.0	2.0	57.7
K60-6-6S	良	17.0	0.5	17.1	11.0	0.5	11.4	45.0	2.0	43.5	17.0	0.5	16.6	56.0	2.0	54.9
K65-6-4	良	30.0	1.0	29.8	15.0	0.5	15.2	48.0	2.0	48.2	20.0	1.0	20.3	63.0	2.5	63.4
K70-6-6	良	30.0	1.0	29.8	15.0	0.5	15.0	53.0	2.0	53.8	20.0	1.0	20.0	68.0	2.5	68.8
K70-6-6P	良	25.0	1.0	24.7	16.0	0.5	16.1	51.0	2.0	50.7	27.0	1.0	26.7	67.0	2.5	66.8
K70-10-10	良	18.0	0.5	18.0	9.0	0.5	9.3	58.0	2.0	57.6	22.0	1.0	21.9	67.0	2.5	66.9
K74-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.5	59.0	2.0	59.4	20.0	1.0	19.7	65.0	2.5	65.9
K80-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.4	57.0	2.0	57.4	22.0	1.0	21.7	63.0	2.5	63.8
K80-6-6	良	30.0	1.0	29.1	15.0	0.5	14.9	63.0	2.5	64.1	20.0	1.0	20.1	78.0	2.5	79.0
K80-6-6L	良	30.0	1.0	30.7	6.0	0.5	6.4	65.0	2.5	66.0	20.0	1.0	19.5	71.0	2.5	72.4
旧K80-10-6	良	20.0	1.0	20.0	8.0	0.5	8.3	69.0	2.5	68.8	10.0	0.5	9.5	77.0	2.5	77.1

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.8	16.0	0.5	15.7	62.0	2.5	62.4	30.0	1.0	30.0	78.0	2.5	78.1
K80-10-10	良	18.0	0.5	17.7	9.0	0.5	9.3	68.0	2.5	67.7	22.0	1.0	22.1	77.0	2.5	77.0
K85-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.4	64.0	2.5	64.1	22.0	1.0	21.9	70.0	2.5	70.5
旧K85-10-6	良	20.0	1.0	20.3	10.0	0.5	10.2	73.0	2.5	72.8	10.0	0.5	9.5	83.0	2.5	83.0
K85-10-6	良	30.0	1.0	29.7	16.0	0.5	16.0	67.0	2.5	67.9	30.0	1.0	30.0	83.0	2.5	83.9
K90-4-4L	良	30.0	1.0	30.1	6.0	0.5	6.4	69.0	2.5	69.1	22.0	1.0	21.6	75.0	2.5	75.5
K90-4-4S	良	30.0	1.0	29.7	33.0	1.0	32.9	55.0	2.0	55.4	27.0	1.0	26.8	88.0	2.5	88.3
K90-6-4	良	30.0	1.0	30.1	15.0	0.5	14.8	70.0	2.5	70.4	23.0	1.0	22.5	85.0	2.5	85.2
K90-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.8	69.0	2.5	69.5	30.0	1.0	30.3	85.0	2.5	85.3
K90-10-6	良	20.0	1.0	19.2	15.0	0.5	15.3	70.0	2.5	70.9	23.0	1.0	23.6	85.0	2.5	86.2
K90-10-6L	良	30.0	1.0	29.5	15.0	0.5	15.2	70.0	2.5	70.8	23.0	1.0	23.4	85.0	2.5	86.0
K95-4-4S	良	30.0	1.0	29.4	33.0	1.0	32.4	60.0	2.5	60.5	27.0	1.0	26.9	93.0	3.0	92.9
K95-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.4	75.0	2.5	75.6	20.0	1.0	19.7	81.0	2.5	82.0
K95-6-6S	良	30.0	1.0	29.8	17.0	0.5	17.1	76.0	2.5	75.7	29.0	1.0	28.4	93.0	3.0	92.8
K95-10-6	良	30.0	1.0	29.8	20.0	1.0	19.8	70.0	2.5	70.6	23.0	1.0	22.2	90.0	3.0	90.4
K95-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.7	74.0	2.5	75.9	30.0	1.0	30.2	90.0	3.0	91.6
K95-10-10	良	30.0	1.0	30.6	20.0	1.0	20.2	70.0	2.5	69.5	25.0	1.0	24.6	90.0	3.0	89.7
K95-13-6	良	22.0	1.0	21.8	20.0	1.0	19.7	70.0	2.5	71.1	23.0	1.0	23.3	90.0	3.0	90.8
K95-13-6L	良	30.0	1.0	29.7	20.0	1.0	20.4	70.0	2.5	70.8	23.0	1.0	23.5	90.0	3.0	91.2
K95-13-13	良	30.0	1.0	30.0	18.0	0.5	18.5	72.0	2.5	71.6	23.0	1.0	23.1	90.0	3.0	90.1
K100-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.5	79.0	2.5	79.1	30.0	1.0	30.1	95.0	3.0	94.6
K100-10-6P	良	25.0	1.0	24.5	15.0	0.5	15.5	81.0	2.5	80.0	25.0	1.0	24.6	96.0	3.0	95.5
K100-10-10	良	30.0	1.0	29.9	19.0	0.5	18.5	76.0	2.5	76.8	24.0	1.0	23.7	95.0	3.0	95.3
K100-13-10	良	22.5	1.0	22.7	15.0	0.5	14.5	75.0	2.5	76.8	41.5	2.0	41.5	90.0	3.0	91.3
K100-13-13	良	22.0	1.0	21.4	15.0	0.5	15.5	80.0	2.5	79.5	23.0	1.0	22.4	95.0	3.0	95.0
K105-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.6	83.0	2.5	83.4	26.0	1.0	26.3	100.0	3.0	100.0
K110-4-4S	良	30.0	1.0	29.6	43.0	2.0	43.1	65.0	2.5	64.1	27.0	1.0	26.8	108.0	3.0	107.2
K110-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	88.0	2.5	87.7	27.0	1.0	26.3	105.0	3.0	104.3
K110-10-6	良	30.0	1.0	29.9	20.0	1.0	20.0	85.0	2.5	85.1	23.0	1.0	22.4	105.0	3.0	105.1
K110-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.5	89.0	2.5	89.0	30.0	1.0	30.0	105.0	3.0	104.5
K110-10-10	良	30.0	1.0	30.7	20.0	1.0	20.3	82.0	2.5	82.1	24.0	1.0	24.2	102.0	3.0	102.4
K110-13-6	良	22.0	1.0	21.7	20.0	1.0	20.2	85.0	2.5	84.1	23.0	1.0	23.0	105.0	3.0	104.3
K110-13-6L	良	30.0	1.0	29.8	20.0	1.0	19.5	85.0	2.5	84.7	23.0	1.0	22.9	105.0	3.0	104.2
K110-13-13	良	30.0	1.0	30.5	20.0	1.0	19.9	84.0	2.5	83.6	23.0	1.0	22.9	104.0	3.0	103.5
K115-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	93.0	3.0	92.6	27.0	1.0	26.3	110.0	3.0	109.1
K120-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	98.0	3.0	97.7	27.0	1.0	26.5	115.0	3.0	114.2
K120-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.6	99.0	3.0	99.3	30.0	1.0	30.3	115.0	3.0	114.9
K120-10-10	良	30.0	1.0	30.0	20.0	1.0	20.4	95.0	3.0	94.6	24.0	1.0	24.3	115.0	3.0	115.0
K120-13-10	良	22.5	1.0	23.0	15.0	0.5	14.7	95.0	3.0	95.4	41.5	2.0	41.5	110.0	3.0	110.1
K120-13-13	良	30.0	1.0	30.0	20.0	1.0	19.8	95.0	3.0	95.3	23.0	1.0	23.4	115.0	3.0	115.1
K125-4-4S	良	30.0	1.0	29.6	48.0	2.0	47.4	75.0	2.5	75.3	27.0	1.0	26.9	123.0	3.0	122.7
K125-10-6	良	30.0	1.0	29.6	20.0	1.0	19.3	100.0	3.0	99.5	23.0	1.0	22.7	120.0	3.0	118.8
K125-13-6	良	22.0	1.0	22.1	20.0	1.0	20.5	100.0	3.0	98.9	23.0	1.0	22.9	120.0	3.0	119.4
K125-13-6L	良	30.0	1.0	30.0	20.0	1.0	20.4	100.0	3.0	99.1	23.0	1.0	23.3	120.0	3.0	119.5
K130-10-10	良	30.0	1.0	29.9	20.0	1.0	20.5	105.0	3.0	105.6	25.0	1.0	24.4	125.0	3.0	126.1
K130-13-10	良	22.5	1.0	22.6	15.0	0.5	14.8	105.0	3.0	105.8	41.5	2.0	41.6	120.0	3.0	120.6
K130-13-13	良	30.0	1.0	30.2	20.0	1.0	19.6	105.0	3.0	105.3	23.0	1.0	23.4	125.0	3.0	124.9
K135-10-6H	良	30.0	1.0	29.6	16.0	0.5	15.6	114.0	3.0	113.6	30.0	1.0	29.6	130.0	3.0	129.2
K145-10-6H	良	30.0	1.0	30.1	16.0	0.5	15.7	124.0	3.0	124.3	30.0	1.0	29.3	140.0	3.0	140.0
K150-10-10	良	30.0	1.0	29.9	20.0	1.0	20.3	125.0	3.0	124.1	25.0	1.0	24.5	145.0	3.0	144.4
K150-13-10	良	22.5	1.0	22.9	15.0	0.5	14.7	125.0	3.0	125.8	41.5	2.0	41.6	140.0	3.0	140.5
K150-13-13	良	30.0	1.0	30.7	20.0	1.0	19.8	125.0	3.0	124.4	23.0	1.0	23.0	145.0	3.0	144.2