

成形材料試験成績表

令和2年12月度



株式会社 未来樹



〒181-0013 東京都三鷹市下連雀3-38-4
三鷹産業プラザ5F
TEL:0422-70-4201 FAX:0422-43-1021

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	959
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.3
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.97
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127

[備考] 本表は、材料メーカーの報告によるもので、当社製品の成形材料です。

K形スピーサ 試験成績書


令和 2年12月度



株式会社 未来樹

〒181-0013 東京都三鷹市下連雀 3-38-4
三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021

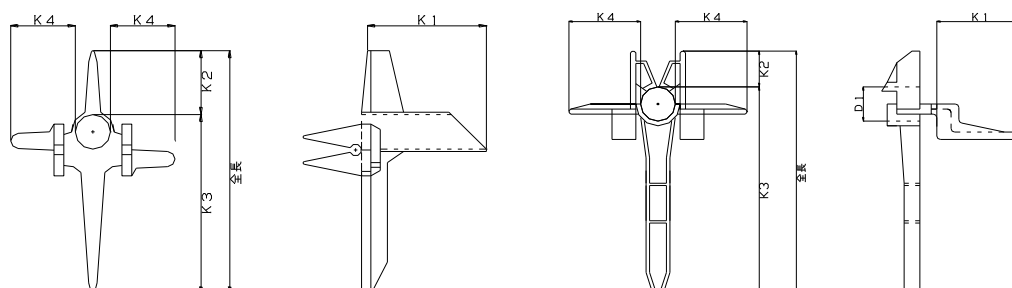

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.2	11.0	0.5	10.9	18.0	0.5	17.9	20.0	1.0	20.6	29.0	1.0	28.8
K30-3-3	良	30.0	1.0	29.7	11.0	0.5	11.3	18.0	0.5	17.8	20.0	1.0	20.7	29.0	1.0	29.1
旧K35-3-3	良	20.0	1.0	19.1	11.0	0.5	10.8	22.0	1.0	21.9	20.0	1.0	20.7	33.0	1.0	32.7
K35-3-3	良	30.0	1.0	29.7	11.0	0.5	11.1	22.0	1.0	22.0	20.0	1.0	20.6	33.0	1.0	33.1
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	10.8	27.0	1.0	27.1	20.0	1.0	20.6	38.0	1.0	37.9
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	11.0	27.0	1.0	27.0	20.0	1.0	20.7	38.0	1.0	38.0
K40-5-4	良	30.0	1.0	29.7	15.0	0.5	15.1	23.0	1.0	22.9	19.0	0.5	18.9	38.0	1.0	38.0
旧K45-3-3	良	20.0	1.0	20.0	11.0	0.5	11.2	32.0	1.0	32.1	20.0	1.0	20.6	43.0	2.0	43.3
K45-3-3	良	30.0	1.0	30.1	11.0	0.5	11.0	32.0	1.0	32.2	20.0	1.0	20.6	43.0	2.0	43.2
K45-5-4	良	30.0	1.0	30.1	15.0	0.5	15.3	28.0	1.0	28.2	19.0	0.5	19.1	43.0	2.0	43.5
K45-6-4	良	30.0	1.0	29.9	15.0	0.5	14.9	29.0	1.0	29.2	20.0	1.0	20.2	44.0	2.0	44.1
旧K50-4-4	良	20.0	1.0	20.0	15.0	0.5	15.4	33.0	1.0	32.2	20.0	1.0	20.2	48.0	2.0	47.6
K50-4-4	良	30.0	1.0	29.8	15.0	0.5	15.4	33.0	1.0	32.4	20.0	1.0	20.2	48.0	2.0	47.8
K50-5-4	良	30.0	1.0	30.1	15.0	0.5	15.0	33.0	1.0	32.8	19.0	0.5	19.3	48.0	2.0	47.8
K50-6-4	良	30.0	1.0	30.1	15.0	0.5	15.1	33.0	1.0	33.2	20.0	1.0	20.1	48.0	2.0	48.3
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.9	35.0	1.0	36.0	17.0	0.5	16.7	47.0	2.0	47.9
旧K55-5-4	良	20.0	1.0	19.1	15.0	0.5	14.7	37.0	1.0	36.7	20.0	1.0	20.5	52.0	2.0	51.4
K55-5-4	良	30.0	1.0	29.7	15.0	0.5	14.8	37.0	1.0	37.1	20.0	1.0	20.6	52.0	2.0	51.9
K55-6-4	良	30.0	1.0	29.7	15.0	0.5	15.0	38.0	1.0	38.0	20.0	1.0	20.2	53.0	2.0	53.0
K60-6-4	良	30.0	1.0	29.9	15.0	0.5	15.4	43.0	2.0	43.3	20.0	1.0	20.1	58.0	2.0	58.7
K60-6-6JR	良	30.0	1.0	30.0	17.0	0.5	16.8	41.0	2.0	40.8	29.0	1.0	28.2	58.0	2.0	57.6
K60-6-6S	良	17.0	0.5	17.3	11.0	0.5	11.3	45.0	2.0	43.6	17.0	0.5	16.5	56.0	2.0	54.9
K65-6-4	良	30.0	1.0	29.9	15.0	0.5	15.1	48.0	2.0	48.4	20.0	1.0	20.1	63.0	2.5	63.5
K70-6-6	良	30.0	1.0	29.9	15.0	0.5	14.9	53.0	2.0	53.7	20.0	1.0	20.1	68.0	2.5	68.6
K70-6-6P	良	25.0	1.0	24.5	16.0	0.5	16.2	51.0	2.0	50.9	27.0	1.0	26.6	67.0	2.5	67.1
K70-10-10	良	18.0	0.5	18.0	9.0	0.5	9.1	58.0	2.0	57.5	22.0	1.0	22.1	67.0	2.5	66.6
K74-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.3	59.0	2.0	59.6	20.0	1.0	19.7	65.0	2.5	65.9
K80-4-4L	良	30.0	1.0	30.1	6.0	0.5	6.5	57.0	2.0	56.8	22.0	1.0	21.7	63.0	2.5	63.3
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.8	63.0	2.5	64.1	20.0	1.0	20.2	78.0	2.5	78.9
K80-6-6L	良	30.0	1.0	30.7	6.0	0.5	6.3	65.0	2.5	66.1	20.0	1.0	19.5	71.0	2.5	72.4
旧K80-10-6	良	20.0	1.0	19.8	8.0	0.5	8.3	69.0	2.5	68.7	10.0	0.5	9.5	77.0	2.5	77.0

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.6	16.0	0.5	15.7	62.0	2.5	62.4	30.0	1.0	30.3	78.0	2.5	78.1
K80-10-10	良	18.0	0.5	18.0	9.0	0.5	9.1	68.0	2.5	67.6	22.0	1.0	22.1	77.0	2.5	76.7
K85-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.4	64.0	2.5	64.1	22.0	1.0	21.8	70.0	2.5	70.5
旧K85-10-6	良	20.0	1.0	20.0	10.0	0.5	10.2	73.0	2.5	73.0	10.0	0.5	9.5	83.0	2.5	83.2
K85-10-6	良	30.0	1.0	29.9	16.0	0.5	16.0	67.0	2.5	67.9	30.0	1.0	30.1	83.0	2.5	83.9
K90-4-4L	良	30.0	1.0	30.1	6.0	0.5	6.4	69.0	2.5	69.3	22.0	1.0	21.6	75.0	2.5	75.7
K90-4-4S	良	30.0	1.0	29.8	33.0	1.0	32.4	55.0	2.0	55.3	27.0	1.0	26.6	88.0	2.5	87.7
K90-6-4	良	30.0	1.0	30.1	15.0	0.5	14.6	70.0	2.5	70.5	23.0	1.0	22.9	85.0	2.5	85.1
K90-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	69.0	2.5	69.7	30.0	1.0	30.2	85.0	2.5	85.4
K90-10-6	良	20.0	1.0	19.2	15.0	0.5	15.3	70.0	2.5	70.8	23.0	1.0	23.4	85.0	2.5	86.1
K90-10-6L	良	30.0	1.0	29.4	15.0	0.5	15.2	70.0	2.5	70.6	23.0	1.0	23.5	85.0	2.5	85.8
K95-4-4S	良	30.0	1.0	29.9	33.0	1.0	32.5	60.0	2.5	60.2	27.0	1.0	26.9	93.0	3.0	92.7
K95-6-6L	良	30.0	1.0	30.7	6.0	0.5	6.5	75.0	2.5	75.7	20.0	1.0	19.6	81.0	2.5	82.2
K95-6-6S	良	30.0	1.0	29.5	17.0	0.5	16.9	76.0	2.5	75.6	29.0	1.0	28.2	93.0	3.0	92.5
K95-10-6	良	30.0	1.0	29.7	20.0	1.0	19.6	70.0	2.5	70.6	23.0	1.0	22.4	90.0	3.0	90.2
K95-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.7	74.0	2.5	75.3	30.0	1.0	30.1	90.0	3.0	91.0
K95-10-10	良	30.0	1.0	30.1	20.0	1.0	20.3	70.0	2.5	69.6	25.0	1.0	24.7	90.0	3.0	89.9
K95-13-6	良	22.0	1.0	22.1	20.0	1.0	20.0	70.0	2.5	70.3	23.0	1.0	23.3	90.0	3.0	90.3
K95-13-6L	良	30.0	1.0	29.9	20.0	1.0	19.8	70.0	2.5	70.7	23.0	1.0	23.4	90.0	3.0	90.5
K95-13-13	良	30.0	1.0	30.3	18.0	0.5	18.5	72.0	2.5	71.0	23.0	1.0	23.0	90.0	3.0	89.5
K100-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.8	79.0	2.5	79.0	30.0	1.0	30.2	95.0	3.0	94.8
K100-10-6P	良	25.0	1.0	24.5	15.0	0.5	15.5	81.0	2.5	80.1	25.0	1.0	24.6	96.0	3.0	95.6
K100-10-10	良	30.0	1.0	29.7	19.0	0.5	18.5	76.0	2.5	76.3	24.0	1.0	23.4	95.0	3.0	94.8
K100-13-10	良	22.5	1.0	22.6	15.0	0.5	14.7	75.0	2.5	76.7	41.5	2.0	41.6	90.0	3.0	91.4
K100-13-13	良	22.0	1.0	21.8	15.0	0.5	15.5	80.0	2.5	79.8	23.0	1.0	22.2	95.0	3.0	95.3
K105-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	83.0	2.5	83.2	26.0	1.0	26.4	100.0	3.0	99.7
K110-4-4S	良	30.0	1.0	29.4	43.0	2.0	43.0	65.0	2.5	64.1	27.0	1.0	26.8	108.0	3.0	107.1
K110-6-6H	良	25.0	1.0	24.8	17.0	0.5	16.6	88.0	2.5	88.1	27.0	1.0	26.2	105.0	3.0	104.7
K110-10-6	良	30.0	1.0	30.0	20.0	1.0	19.9	85.0	2.5	84.8	23.0	1.0	22.4	105.0	3.0	104.7
K110-10-6H	良	30.0	1.0	30.5	16.0	0.5	15.6	89.0	2.5	89.1	30.0	1.0	29.9	105.0	3.0	104.7
K110-10-10	良	30.0	1.0	30.7	20.0	1.0	19.4	82.0	2.5	81.7	24.0	1.0	24.0	102.0	3.0	101.1
K110-13-6	良	22.0	1.0	22.1	20.0	1.0	19.6	85.0	2.5	84.3	23.0	1.0	23.1	105.0	3.0	103.9
K110-13-6L	良	30.0	1.0	29.7	20.0	1.0	20.1	85.0	2.5	84.2	23.0	1.0	23.3	105.0	3.0	104.3
K110-13-13	良	30.0	1.0	30.3	20.0	1.0	19.9	84.0	2.5	83.6	23.0	1.0	23.1	104.0	3.0	103.5
K115-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	93.0	3.0	92.9	27.0	1.0	26.4	110.0	3.0	109.4
K120-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	98.0	3.0	97.5	27.0	1.0	26.4	115.0	3.0	114.0
K120-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.7	99.0	3.0	99.5	30.0	1.0	30.0	115.0	3.0	115.2
K120-10-10	良	30.0	1.0	30.7	20.0	1.0	19.7	95.0	3.0	95.0	24.0	1.0	24.0	115.0	3.0	114.7
K120-13-10	良	22.5	1.0	22.6	15.0	0.5	14.6	95.0	3.0	95.4	41.5	2.0	41.4	110.0	3.0	110.0
K120-13-13	良	30.0	1.0	30.2	20.0	1.0	19.8	95.0	3.0	95.9	23.0	1.0	23.1	115.0	3.0	115.7
K125-4-4S	良	30.0	1.0	29.9	48.0	2.0	47.4	75.0	2.5	75.2	27.0	1.0	26.5	123.0	3.0	122.6
K125-10-6	良	30.0	1.0	29.6	20.0	1.0	19.6	100.0	3.0	100.2	23.0	1.0	22.8	120.0	3.0	119.8
K125-13-6	良	22.0	1.0	22.2	20.0	1.0	19.7	100.0	3.0	98.8	23.0	1.0	23.3	120.0	3.0	118.5
K125-13-6L	良	30.0	1.0	30.2	20.0	1.0	19.8	100.0	3.0	99.6	23.0	1.0	22.9	120.0	3.0	119.4
K130-10-10	良	30.0	1.0	30.8	20.0	1.0	20.3	105.0	3.0	105.0	25.0	1.0	24.5	125.0	3.0	125.3
K130-13-10	良	22.5	1.0	22.6	15.0	0.5	14.8	105.0	3.0	106.1	41.5	2.0	41.5	120.0	3.0	120.9
K130-13-13	良	30.0	1.0	30.1	20.0	1.0	19.7	105.0	3.0	105.9	23.0	1.0	23.1	125.0	3.0	125.6
K135-10-6H	良	30.0	1.0	29.6	16.0	0.5	15.7	114.0	3.0	113.8	30.0	1.0	29.7	130.0	3.0	129.5
K145-10-6H	良	30.0	1.0	29.8	16.0	0.5	15.9	124.0	3.0	123.2	30.0	1.0	30.0	140.0	3.0	139.1
K150-10-10	良	30.0	1.0	30.5	20.0	1.0	19.8	125.0	3.0	124.0	25.0	1.0	24.6	145.0	3.0	143.8
K150-13-10	良	22.5	1.0	22.4	15.0	0.5	14.7	125.0	3.0	126.1	41.5	2.0	41.7	140.0	3.0	140.8
K150-13-13	良	30.0	1.0	30.1	20.0	1.0	20.0	125.0	3.0	123.9	23.0	1.0	22.9	145.0	3.0	143.9