

成形材料試験成績表

令和6年 8月度



株式会社 未来樹



〒181-0013 東京都三鷹市下連雀3-38-4

三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021


成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	963
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.5
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.53
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127


〔備考〕 本表は、材料メーカー報告および社内測定結果によるもので、当社製品の成形材料です。

K形スペーサ 試験成績書

令和 6年 8月度



〒181-0013 東京都三鷹市下連雀 3-38-4
三鷹産業プラザ5F
TEL:0422-70-4201 FAX:0422-43-1021

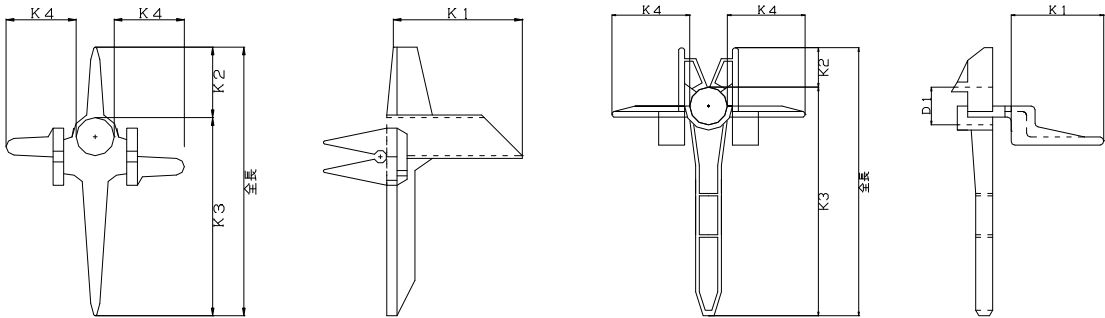

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.2	11.0	0.5	11.0	18.0	0.5	17.9	20.0	1.0	20.8	29.0	1.0	28.9
K30-3-3	良	30.0	1.0	29.9	11.0	0.5	11.3	18.0	0.5	17.8	20.0	1.0	20.8	29.0	1.0	29.1
旧K35-3-3	良	20.0	1.0	19.1	11.0	0.5	11.1	22.0	1.0	21.7	20.0	1.0	20.7	33.0	1.0	32.8
K35-3-3	良	30.0	1.0	29.7	11.0	0.5	11.1	22.0	1.0	22.0	20.0	1.0	20.8	33.0	1.0	33.1
旧K40-3-3	良	20.0	1.0	19.9	11.0	0.5	11.2	27.0	1.0	26.9	20.0	1.0	20.6	38.0	1.0	38.1
K40-3-3	良	30.0	1.0	29.9	11.0	0.5	11.0	27.0	1.0	27.0	20.0	1.0	20.6	38.0	1.0	38.0
K40-5-4	良	30.0	1.0	29.9	15.0	0.5	15.2	23.0	1.0	22.8	19.0	0.5	18.8	38.0	1.0	38.0
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	11.2	32.0	1.0	32.1	20.0	1.0	20.4	43.0	2.0	43.3
K45-3-3	良	30.0	1.0	29.9	11.0	0.5	11.4	32.0	1.0	32.4	20.0	1.0	20.6	43.0	2.0	43.8
K45-5-4	良	30.0	1.0	29.9	15.0	0.5	15.2	28.0	1.0	28.2	19.0	0.5	19.4	43.0	2.0	43.4
K45-6-4	良	30.0	1.0	29.9	15.0	0.5	15.3	29.0	1.0	29.4	20.0	1.0	20.2	44.0	2.0	44.7
旧K50-4-4	良	20.0	1.0	20.1	15.0	0.5	15.5	33.0	1.0	32.2	20.0	1.0	20.3	48.0	2.0	47.7
K50-4-4	良	30.0	1.0	29.9	15.0	0.5	15.5	33.0	1.0	32.5	20.0	1.0	20.5	48.0	2.0	48.0
K50-5-4	良	30.0	1.0	30.0	15.0	0.5	15.0	33.0	1.0	32.9	19.0	0.5	19.0	48.0	2.0	47.9
K50-6-4	良	30.0	1.0	29.9	15.0	0.5	15.5	33.0	1.0	33.4	20.0	1.0	20.0	48.0	2.0	48.9
K50-6-6S	良	16.0	0.5	15.6	12.0	0.5	12.0	35.0	1.0	35.8	17.0	0.5	16.6	47.0	2.0	47.8
旧K55-5-4	良	20.0	1.0	19.2	15.0	0.5	15.1	37.0	1.0	37.2	20.0	1.0	20.5	52.0	2.0	52.3
K55-5-4	良	30.0	1.0	30.0	15.0	0.5	14.8	37.0	1.0	37.0	20.0	1.0	20.8	52.0	2.0	51.8
K55-6-4	良	30.0	1.0	29.8	15.0	0.5	15.3	38.0	1.0	38.1	20.0	1.0	20.2	53.0	2.0	53.4
K60-6-4	良	30.0	1.0	30.1	15.0	0.5	15.4	43.0	2.0	43.3	20.0	1.0	20.2	58.0	2.0	58.7
K60-6-6JR	良	30.0	1.0	30.0	17.0	0.5	17.1	41.0	2.0	40.5	29.0	1.0	28.5	58.0	2.0	57.6
K60-6-6S	良	17.0	0.5	17.1	11.0	0.5	11.4	45.0	2.0	43.6	17.0	0.5	16.6	56.0	2.0	55.0
K65-6-4	良	30.0	1.0	29.9	15.0	0.5	15.3	48.0	2.0	48.1	20.0	1.0	20.1	63.0	2.5	63.4
K70-6-6	良	30.0	1.0	29.8	15.0	0.5	15.0	53.0	2.0	53.6	20.0	1.0	19.7	68.0	2.5	68.6
K70-6-6P	良	25.0	1.0	24.6	16.0	0.5	16.5	51.0	2.0	50.5	27.0	1.0	26.5	67.0	2.5	67.0
K70-10-10	良	18.0	0.5	18.0	9.0	0.5	9.2	58.0	2.0	57.5	22.0	1.0	22.2	67.0	2.5	66.7
K74-6-6L	良	30.0	1.0	31.0	6.0	0.5	6.5	59.0	2.0	59.1	20.0	1.0	19.7	65.0	2.5	65.6
K80-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.5	57.0	2.0	56.8	22.0	1.0	21.9	63.0	2.5	63.3
K80-6-6	良	30.0	1.0	29.1	15.0	0.5	15.0	63.0	2.5	64.2	20.0	1.0	20.2	78.0	2.5	79.2
K80-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	65.0	2.5	66.2	20.0	1.0	19.6	71.0	2.5	72.6
旧K80-10-6	良	20.0	1.0	19.9	8.0	0.5	8.2	69.0	2.5	68.9	10.0	0.5	9.5	77.0	2.5	77.1

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.4	16.0	0.5	15.8	62.0	2.5	62.5	30.0	1.0	30.0	78.0	2.5	78.3
K80-10-10	良	18.0	0.5	17.6	9.0	0.5	9.0	68.0	2.5	67.7	22.0	1.0	22.0	77.0	2.5	76.7
K85-4-4L	良	30.0	1.0	29.8	6.0	0.5	6.4	64.0	2.5	64.2	22.0	1.0	22.0	70.0	2.5	70.6
旧K85-10-6	良	20.0	1.0	20.2	10.0	0.5	10.3	73.0	2.5	72.7	10.0	0.5	9.5	83.0	2.5	83.0
K85-10-6	良	30.0	1.0	29.7	16.0	0.5	15.6	67.0	2.5	67.9	30.0	1.0	30.2	83.0	2.5	83.5
K90-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.4	69.0	2.5	69.1	22.0	1.0	21.5	75.0	2.5	75.5
K90-4-4S	良	30.0	1.0	29.7	33.0	1.0	32.7	55.0	2.0	55.5	27.0	1.0	26.9	88.0	2.5	88.2
K90-6-4	良	30.0	1.0	30.3	15.0	0.5	14.5	70.0	2.5	70.4	23.0	1.0	23.0	85.0	2.5	84.9
K90-10-6H	良	30.0	1.0	30.9	16.0	0.5	15.8	69.0	2.5	69.8	30.0	1.0	30.1	85.0	2.5	85.6
K90-10-6	良	20.0	1.0	19.4	15.0	0.5	15.1	70.0	2.5	70.7	23.0	1.0	23.5	85.0	2.5	85.8
K90-10-6L	良	30.0	1.0	29.4	15.0	0.5	15.3	70.0	2.5	70.6	23.0	1.0	23.3	85.0	2.5	85.9
K95-4-4S	良	30.0	1.0	29.6	33.0	1.0	32.5	60.0	2.5	60.0	27.0	1.0	26.6	93.0	3.0	92.5
K95-6-6L	良	30.0	1.0	31.0	6.0	0.5	6.3	75.0	2.5	75.8	20.0	1.0	19.8	81.0	2.5	82.1
K95-6-6S	良	30.0	1.0	30.0	17.0	0.5	16.8	76.0	2.5	75.5	29.0	1.0	28.3	93.0	3.0	92.3
K95-10-6	良	30.0	1.0	29.7	20.0	1.0	19.9	70.0	2.5	70.8	23.0	1.0	22.8	90.0	3.0	90.7
K95-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.6	74.0	2.5	75.1	30.0	1.0	30.1	90.0	3.0	90.7
K95-10-10	良	30.0	1.0	30.0	20.0	1.0	19.7	70.0	2.5	69.7	25.0	1.0	24.6	90.0	3.0	89.4
K95-13-6	良	22.0	1.0	21.8	20.0	1.0	19.9	70.0	2.5	70.2	23.0	1.0	23.4	90.0	3.0	90.1
K95-13-6L	良	30.0	1.0	29.9	20.0	1.0	20.3	70.0	2.5	71.0	23.0	1.0	23.1	90.0	3.0	91.3
K95-13-13	良	30.0	1.0	30.8	18.0	0.5	18.5	72.0	2.5	70.8	23.0	1.0	23.0	90.0	3.0	89.3
K100-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.5	79.0	2.5	79.1	30.0	1.0	30.0	95.0	3.0	94.6
K100-10-6P	良	25.0	1.0	24.9	15.0	0.5	15.5	81.0	2.5	80.9	25.0	1.0	24.6	96.0	3.0	96.4
K100-10-10	良	30.0	1.0	29.9	19.0	0.5	18.5	76.0	2.5	76.6	24.0	1.0	23.7	95.0	3.0	95.1
K100-13-10	良	22.5	1.0	22.3	15.0	0.5	14.7	75.0	2.5	76.7	41.5	2.0	41.6	90.0	3.0	91.4
K100-13-13	良	22.0	1.0	21.9	15.0	0.5	15.5	80.0	2.5	79.2	23.0	1.0	22.5	95.0	3.0	94.7
K105-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	83.0	2.5	83.2	26.0	1.0	26.5	100.0	3.0	99.7
K110-4-4S	良	30.0	1.0	29.8	43.0	2.0	43.0	65.0	2.5	64.2	27.0	1.0	26.6	108.0	3.0	107.2
K110-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	88.0	2.5	87.8	27.0	1.0	26.4	105.0	3.0	104.3
K110-10-6	良	30.0	1.0	30.0	20.0	1.0	19.3	85.0	2.5	85.2	23.0	1.0	22.8	105.0	3.0	104.5
K110-10-6H	良	30.0	1.0	30.9	16.0	0.5	15.6	89.0	2.5	89.1	30.0	1.0	30.0	105.0	3.0	104.7
K110-10-10	良	30.0	1.0	30.0	20.0	1.0	20.2	82.0	2.5	82.1	24.0	1.0	24.3	102.0	3.0	102.3
K110-13-6	良	22.0	1.0	21.9	20.0	1.0	19.6	85.0	2.5	84.3	23.0	1.0	23.2	105.0	3.0	103.9
K110-13-6L	良	30.0	1.0	29.8	20.0	1.0	19.7	85.0	2.5	84.7	23.0	1.0	23.1	105.0	3.0	104.4
K110-13-13	良	30.0	1.0	30.0	20.0	1.0	19.9	84.0	2.5	83.9	23.0	1.0	23.2	104.0	3.0	103.8
K115-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	93.0	3.0	93.2	27.0	1.0	26.3	110.0	3.0	109.8
K120-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	98.0	3.0	98.2	27.0	1.0	26.2	115.0	3.0	114.7
K120-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.5	99.0	3.0	99.1	30.0	1.0	30.0	115.0	3.0	114.6
K120-10-10	良	30.0	1.0	30.4	20.0	1.0	19.7	95.0	3.0	94.9	24.0	1.0	24.2	115.0	3.0	114.6
K120-13-10	良	22.5	1.0	22.7	15.0	0.5	14.9	95.0	3.0	96.2	41.5	2.0	41.7	110.0	3.0	111.1
K120-13-13	良	30.0	1.0	30.1	20.0	1.0	19.8	95.0	3.0	95.6	23.0	1.0	23.3	115.0	3.0	115.4
K125-4-4S	良	30.0	1.0	29.9	48.0	2.0	47.2	75.0	2.5	74.3	27.0	1.0	26.9	123.0	3.0	121.5
K125-10-6	良	30.0	1.0	29.9	20.0	1.0	19.6	100.0	3.0	99.8	23.0	1.0	22.8	120.0	3.0	119.4
K125-13-6	良	22.0	1.0	21.7	20.0	1.0	20.4	100.0	3.0	99.3	23.0	1.0	23.1	120.0	3.0	119.7
K125-13-6L	良	30.0	1.0	29.9	20.0	1.0	19.9	100.0	3.0	99.3	23.0	1.0	23.0	120.0	3.0	119.2
K130-10-10	良	30.0	1.0	30.2	20.0	1.0	19.9	105.0	3.0	105.6	25.0	1.0	24.4	125.0	3.0	125.5
K130-13-10	良	22.5	1.0	22.4	15.0	0.5	14.8	105.0	3.0	105.6	41.5	2.0	41.5	120.0	3.0	120.4
K130-13-13	良	30.0	1.0	30.1	20.0	1.0	20.0	105.0	3.0	105.3	23.0	1.0	23.5	125.0	3.0	125.3
K135-10-6H	良	30.0	1.0	30.4	16.0	0.5	15.8	114.0	3.0	113.4	30.0	1.0	29.8	130.0	3.0	129.2
K145-10-6H	良	30.0	1.0	30.0	16.0	0.5	15.7	124.0	3.0	123.9	30.0	1.0	29.8	140.0	3.0	139.6
K150-10-10	良	30.0	1.0	30.3	20.0	1.0	19.9	125.0	3.0	123.8	25.0	1.0	24.3	145.0	3.0	143.7
K150-13-10	良	22.5	1.0	22.8	15.0	0.5	14.9	125.0	3.0	125.2	41.5	2.0	41.6	140.0	3.0	140.1
K150-13-13	良	30.0	1.0	30.7	20.0	1.0	20.0	125.0	3.0	124.9	23.0	1.0	23.0	145.0	3.0	144.9