

成形材料試験成績表

令和6年 9月度



株式会社 未来樹



〒181-0013 東京都三鷹市下連雀3-38-4

三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021

成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	963
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.3
引張降伏強さ	JIS K 7161	MPa	19.61 以上	27.96
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127


〔備考〕 本表は、材料メーカー報告および社内測定結果によるもので、当社製品の成形材料です。

K形スペーサ 試験成績書

令和 6年 9月 度



〒181-0013 東京都三鷹市下連雀 3-38-4
三鷹産業プラザ5F
TEL:0422-70-4201 FAX:0422-43-1021

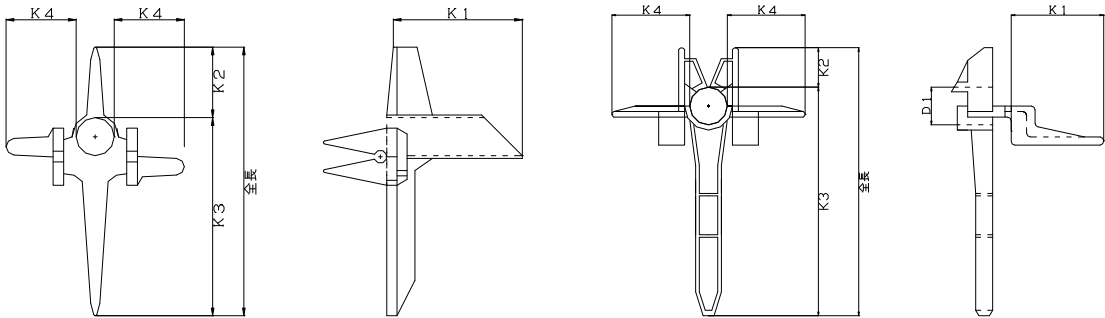

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.2	11.0	0.5	11.2	18.0	0.5	17.9	20.0	1.0	20.6	29.0	1.0	29.1
K30-3-3	良	30.0	1.0	29.9	11.0	0.5	11.2	18.0	0.5	17.9	20.0	1.0	20.8	29.0	1.0	29.1
旧K35-3-3	良	20.0	1.0	19.2	11.0	0.5	11.1	22.0	1.0	21.7	20.0	1.0	20.7	33.0	1.0	32.8
K35-3-3	良	30.0	1.0	29.7	11.0	0.5	11.1	22.0	1.0	21.8	20.0	1.0	20.8	33.0	1.0	32.9
旧K40-3-3	良	20.0	1.0	19.9	11.0	0.5	11.2	27.0	1.0	27.0	20.0	1.0	20.5	38.0	1.0	38.2
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	27.0	1.0	27.2	20.0	1.0	20.5	38.0	1.0	38.5
K40-5-4	良	30.0	1.0	29.8	15.0	0.5	15.1	23.0	1.0	22.9	19.0	0.5	19.3	38.0	1.0	38.0
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	10.9	32.0	1.0	32.2	20.0	1.0	20.6	43.0	2.0	43.1
K45-3-3	良	30.0	1.0	30.0	11.0	0.5	11.2	32.0	1.0	32.4	20.0	1.0	20.5	43.0	2.0	43.6
K45-5-4	良	30.0	1.0	30.2	15.0	0.5	15.2	28.0	1.0	27.9	19.0	0.5	19.1	43.0	2.0	43.1
K45-6-4	良	30.0	1.0	29.8	15.0	0.5	15.1	29.0	1.0	29.1	20.0	1.0	20.1	44.0	2.0	44.2
旧K50-4-4	良	20.0	1.0	19.9	15.0	0.5	15.5	33.0	1.0	32.3	20.0	1.0	20.2	48.0	2.0	47.8
K50-4-4	良	30.0	1.0	29.9	15.0	0.5	15.4	33.0	1.0	32.4	20.0	1.0	20.3	48.0	2.0	47.8
K50-5-4	良	30.0	1.0	30.0	15.0	0.5	15.1	33.0	1.0	33.0	19.0	0.5	19.3	48.0	2.0	48.1
K50-6-4	良	30.0	1.0	30.0	15.0	0.5	15.2	33.0	1.0	33.4	20.0	1.0	20.2	48.0	2.0	48.6
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.9	35.0	1.0	36.0	17.0	0.5	16.7	47.0	2.0	47.9
旧K55-5-4	良	20.0	1.0	19.1	15.0	0.5	14.7	37.0	1.0	36.7	20.0	1.0	20.6	52.0	2.0	51.4
K55-5-4	良	30.0	1.0	30.0	15.0	0.5	14.8	37.0	1.0	37.4	20.0	1.0	20.3	52.0	2.0	52.2
K55-6-4	良	30.0	1.0	29.8	15.0	0.5	15.3	38.0	1.0	38.1	20.0	1.0	20.1	53.0	2.0	53.4
K60-6-4	良	30.0	1.0	29.9	15.0	0.5	15.1	43.0	2.0	43.1	20.0	1.0	20.1	58.0	2.0	58.2
K60-6-6JR	良	30.0	1.0	29.5	17.0	0.5	17.1	41.0	2.0	40.6	29.0	1.0	28.4	58.0	2.0	57.7
K60-6-6S	良	17.0	0.5	17.3	11.0	0.5	11.4	45.0	2.0	43.9	17.0	0.5	16.6	56.0	2.0	55.3
K65-6-4	良	30.0	1.0	29.8	15.0	0.5	15.2	48.0	2.0	48.3	20.0	1.0	20.3	63.0	2.5	63.5
K70-6-6	良	30.0	1.0	29.8	15.0	0.5	15.1	53.0	2.0	53.6	20.0	1.0	20.1	68.0	2.5	68.7
K70-6-6P	良	25.0	1.0	24.6	16.0	0.5	16.3	51.0	2.0	51.0	27.0	1.0	26.3	67.0	2.5	67.3
K70-10-10	良	18.0	0.5	18.1	9.0	0.5	9.2	58.0	2.0	57.6	22.0	1.0	22.0	67.0	2.5	66.8
K74-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.4	59.0	2.0	59.3	20.0	1.0	19.5	65.0	2.5	65.7
K80-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.5	57.0	2.0	56.8	22.0	1.0	21.5	63.0	2.5	63.3
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.8	63.0	2.5	64.1	20.0	1.0	19.8	78.0	2.5	78.9
K80-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	65.0	2.5	66.2	20.0	1.0	19.7	71.0	2.5	72.6
旧K80-10-6	良	20.0	1.0	20.2	8.0	0.5	8.3	69.0	2.5	68.9	10.0	0.5	9.5	77.0	2.5	77.2

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.6	16.0	0.5	15.7	62.0	2.5	62.8	30.0	1.0	30.1	78.0	2.5	78.5
K80-10-10	良	18.0	0.5	17.9	9.0	0.5	9.1	68.0	2.5	67.8	22.0	1.0	22.0	77.0	2.5	76.9
K85-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.4	64.0	2.5	63.9	22.0	1.0	21.5	70.0	2.5	70.3
旧K85-10-6	良	20.0	1.0	20.1	10.0	0.5	10.2	73.0	2.5	72.4	10.0	0.5	9.5	83.0	2.5	82.6
K85-10-6	良	30.0	1.0	29.8	16.0	0.5	15.9	67.0	2.5	67.6	30.0	1.0	30.2	83.0	2.5	83.5
K90-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.4	69.0	2.5	69.0	22.0	1.0	22.0	75.0	2.5	75.4
K90-4-4S	良	30.0	1.0	29.4	33.0	1.0	32.9	55.0	2.0	55.2	27.0	1.0	26.6	88.0	2.5	88.1
K90-6-4	良	30.0	1.0	30.0	15.0	0.5	14.8	70.0	2.5	70.7	23.0	1.0	22.6	85.0	2.5	85.5
K90-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.6	69.0	2.5	69.8	30.0	1.0	29.9	85.0	2.5	85.4
K90-10-6	良	20.0	1.0	19.3	15.0	0.5	15.4	70.0	2.5	70.6	23.0	1.0	23.1	85.0	2.5	86.0
K90-10-6L	良	30.0	1.0	29.5	15.0	0.5	15.3	70.0	2.5	70.8	23.0	1.0	23.4	85.0	2.5	86.1
K95-4-4S	良	30.0	1.0	29.8	33.0	1.0	32.7	60.0	2.5	60.1	27.0	1.0	26.7	93.0	3.0	92.8
K95-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.3	75.0	2.5	75.6	20.0	1.0	19.6	81.0	2.5	81.9
K95-6-6S	良	30.0	1.0	29.7	17.0	0.5	17.0	76.0	2.5	75.7	29.0	1.0	28.4	93.0	3.0	92.7
K95-10-6	良	30.0	1.0	29.6	20.0	1.0	19.5	70.0	2.5	70.1	23.0	1.0	22.8	90.0	3.0	89.6
K95-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	74.0	2.5	76.0	30.0	1.0	30.1	90.0	3.0	91.7
K95-10-10	良	30.0	1.0	30.4	20.0	1.0	20.4	70.0	2.5	69.4	25.0	1.0	24.5	90.0	3.0	89.8
K95-13-6	良	22.0	1.0	22.1	20.0	1.0	20.0	70.0	2.5	70.3	23.0	1.0	23.3	90.0	3.0	90.3
K95-13-6L	良	30.0	1.0	29.8	20.0	1.0	19.6	70.0	2.5	70.8	23.0	1.0	23.1	90.0	3.0	90.4
K95-13-13	良	30.0	1.0	30.5	18.0	0.5	18.5	72.0	2.5	71.3	23.0	1.0	23.3	90.0	3.0	89.8
K100-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	79.0	2.5	79.2	30.0	1.0	30.3	95.0	3.0	94.9
K100-10-6P	良	25.0	1.0	25.0	15.0	0.5	15.5	81.0	2.5	80.7	25.0	1.0	24.4	96.0	3.0	96.2
K100-10-10	良	30.0	1.0	29.4	19.0	0.5	18.5	76.0	2.5	76.2	24.0	1.0	23.6	95.0	3.0	94.7
K100-13-10	良	22.5	1.0	22.8	15.0	0.5	14.6	75.0	2.5	76.8	41.5	2.0	41.4	90.0	3.0	91.4
K100-13-13	良	22.0	1.0	21.7	15.0	0.5	15.5	80.0	2.5	79.1	23.0	1.0	22.2	95.0	3.0	94.6
K105-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	83.0	2.5	82.7	26.0	1.0	26.3	100.0	3.0	99.2
K110-4-4S	良	30.0	1.0	29.6	43.0	2.0	43.6	65.0	2.5	64.2	27.0	1.0	26.6	108.0	3.0	107.8
K110-6-6H	良	25.0	1.0	24.5	17.0	0.5	16.5	88.0	2.5	88.1	27.0	1.0	26.4	105.0	3.0	104.6
K110-10-6	良	30.0	1.0	30.0	20.0	1.0	19.7	85.0	2.5	85.3	23.0	1.0	22.7	105.0	3.0	105.0
K110-10-6H	良	30.0	1.0	30.4	16.0	0.5	15.5	89.0	2.5	89.0	30.0	1.0	29.9	105.0	3.0	104.5
K110-10-10	良	30.0	1.0	30.4	20.0	1.0	20.4	82.0	2.5	81.8	24.0	1.0	24.1	102.0	3.0	102.2
K110-13-6	良	22.0	1.0	21.7	20.0	1.0	19.6	85.0	2.5	84.7	23.0	1.0	22.9	105.0	3.0	104.3
K110-13-6L	良	30.0	1.0	29.7	20.0	1.0	19.9	85.0	2.5	84.4	23.0	1.0	23.5	105.0	3.0	104.3
K110-13-13	良	30.0	1.0	30.1	20.0	1.0	20.1	84.0	2.5	83.9	23.0	1.0	23.0	104.0	3.0	104.0
K115-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	93.0	3.0	92.7	27.0	1.0	26.4	110.0	3.0	109.3
K120-6-6H	良	25.0	1.0	24.5	17.0	0.5	16.6	98.0	3.0	98.4	27.0	1.0	26.3	115.0	3.0	115.0
K120-10-6H	良	30.0	1.0	31.0	16.0	0.5	15.6	99.0	3.0	98.9	30.0	1.0	30.1	115.0	3.0	114.5
K120-10-10	良	30.0	1.0	30.0	20.0	1.0	20.1	95.0	3.0	94.6	24.0	1.0	24.2	115.0	3.0	114.7
K120-13-10	良	22.5	1.0	22.6	15.0	0.5	14.7	95.0	3.0	96.3	41.5	2.0	41.4	110.0	3.0	111.0
K120-13-13	良	30.0	1.0	30.2	20.0	1.0	19.8	95.0	3.0	95.5	23.0	1.0	23.3	115.0	3.0	115.3
K125-4-4S	良	30.0	1.0	29.5	48.0	2.0	47.1	75.0	2.5	74.9	27.0	1.0	26.8	123.0	3.0	122.0
K125-10-6	良	30.0	1.0	29.7	20.0	1.0	19.6	100.0	3.0	100.1	23.0	1.0	22.8	120.0	3.0	119.7
K125-13-6	良	22.0	1.0	22.0	20.0	1.0	19.8	100.0	3.0	99.0	23.0	1.0	23.0	120.0	3.0	118.8
K125-13-6L	良	30.0	1.0	29.8	20.0	1.0	19.8	100.0	3.0	100.0	23.0	1.0	23.0	120.0	3.0	119.8
K130-10-10	良	30.0	1.0	30.1	20.0	1.0	20.1	105.0	3.0	104.7	25.0	1.0	24.3	125.0	3.0	124.8
K130-13-10	良	22.5	1.0	22.5	15.0	0.5	14.6	105.0	3.0	105.4	41.5	2.0	41.4	120.0	3.0	120.0
K130-13-13	良	30.0	1.0	30.3	20.0	1.0	19.5	105.0	3.0	105.7	23.0	1.0	23.3	125.0	3.0	125.2
K135-10-6H	良	30.0	1.0	29.8	16.0	0.5	15.5	114.0	3.0	113.7	30.0	1.0	29.4	130.0	3.0	129.2
K145-10-6H	良	30.0	1.0	29.6	16.0	0.5	15.7	124.0	3.0	123.8	30.0	1.0	29.4	140.0	3.0	139.5
K150-10-10	良	30.0	1.0	30.1	20.0	1.0	20.6	125.0	3.0	125.0	25.0	1.0	24.5	145.0	3.0	145.6
K150-13-10	良	22.5	1.0	22.7	15.0	0.5	14.9	125.0	3.0	125.7	41.5	2.0	41.6	140.0	3.0	140.6
K150-13-13	良	30.0	1.0	30.3	20.0	1.0	20.5	125.0	3.0	123.8	23.0	1.0	23.1	145.0	3.0	144.3