

成形材料試験成績表

令和6年 11月度



株式会社 未来樹



〒181-0013 東京都三鷹市下連雀3-38-4

三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021


成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	962
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	5.3
引張降伏強さ	JIS K 7161	MPa	19.61 以上	28.00
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカト軟化点	JIS K 7206	°C	105 以上	127


〔備考〕 本表は、材料メーカー報告および社内測定結果によるもので、当社製品の成形材料です。

K形スペーサ 試験成績書

令和 6年11月度



〒181-0013 東京都三鷹市下連雀 3-38-4
三鷹産業プラザ5F
TEL:0422-70-4201 FAX:0422-43-1021

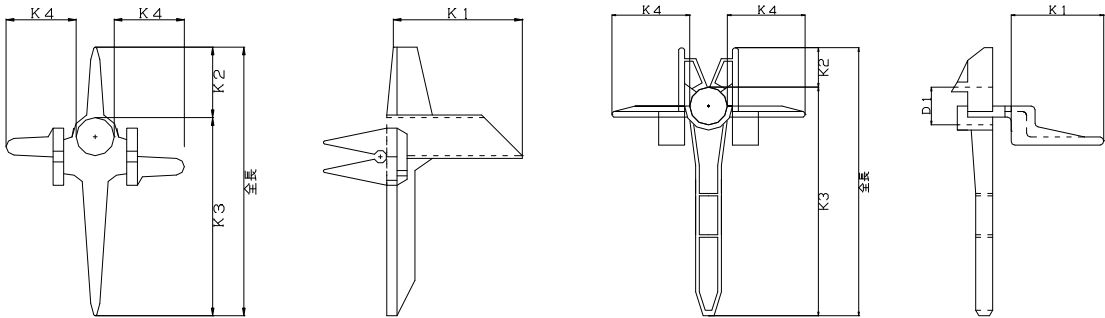

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.1	11.0	0.5	10.8	18.0	0.5	17.8	20.0	1.0	20.7	29.0	1.0	28.6
K30-3-3	良	30.0	1.0	30.0	11.0	0.5	11.1	18.0	0.5	18.0	20.0	1.0	20.7	29.0	1.0	29.1
旧K35-3-3	良	20.0	1.0	19.4	11.0	0.5	10.9	22.0	1.0	21.9	20.0	1.0	20.6	33.0	1.0	32.8
K35-3-3	良	30.0	1.0	29.9	11.0	0.5	11.1	22.0	1.0	22.0	20.0	1.0	20.7	33.0	1.0	33.1
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	11.2	27.0	1.0	27.1	20.0	1.0	20.6	38.0	1.0	38.3
K40-3-3	良	30.0	1.0	30.1	11.0	0.5	11.0	27.0	1.0	27.1	20.0	1.0	20.6	38.0	1.0	38.1
K40-5-4	良	30.0	1.0	30.1	15.0	0.5	15.2	23.0	1.0	22.8	19.0	0.5	19.1	38.0	1.0	38.0
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	11.4	32.0	1.0	31.9	20.0	1.0	20.5	43.0	2.0	43.3
K45-3-3	良	30.0	1.0	30.1	11.0	0.5	11.0	32.0	1.0	32.1	20.0	1.0	20.5	43.0	2.0	43.1
K45-5-4	良	30.0	1.0	30.1	15.0	0.5	15.2	28.0	1.0	28.1	19.0	0.5	19.2	43.0	2.0	43.3
K45-6-4	良	30.0	1.0	29.9	15.0	0.5	15.1	29.0	1.0	29.2	20.0	1.0	20.2	44.0	2.0	44.3
旧K50-4-4	良	20.0	1.0	20.2	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.3	48.0	2.0	47.7
K50-4-4	良	30.0	1.0	29.9	15.0	0.5	15.5	33.0	1.0	32.4	20.0	1.0	20.5	48.0	2.0	47.9
K50-5-4	良	30.0	1.0	29.9	15.0	0.5	15.0	33.0	1.0	32.5	19.0	0.5	19.2	48.0	2.0	47.5
K50-6-4	良	30.0	1.0	30.0	15.0	0.5	15.5	33.0	1.0	33.4	20.0	1.0	20.2	48.0	2.0	48.9
K50-6-6S	良	16.0	0.5	15.6	12.0	0.5	11.7	35.0	1.0	35.9	17.0	0.5	16.7	47.0	2.0	47.6
旧K55-5-4	良	20.0	1.0	19.1	15.0	0.5	14.9	37.0	1.0	37.5	20.0	1.0	20.3	52.0	2.0	52.4
K55-5-4	良	30.0	1.0	29.8	15.0	0.5	15.2	37.0	1.0	36.9	20.0	1.0	20.7	52.0	2.0	52.1
K55-6-4	良	30.0	1.0	29.8	15.0	0.5	15.2	38.0	1.0	38.4	20.0	1.0	20.2	53.0	2.0	53.6
K60-6-4	良	30.0	1.0	30.0	15.0	0.5	15.3	43.0	2.0	43.4	20.0	1.0	20.2	58.0	2.0	58.7
K60-6-6JR	良	30.0	1.0	29.4	17.0	0.5	17.2	41.0	2.0	40.5	29.0	1.0	28.3	58.0	2.0	57.7
K60-6-6S	良	17.0	0.5	17.1	11.0	0.5	11.4	45.0	2.0	43.8	17.0	0.5	16.7	56.0	2.0	55.2
K65-6-4	良	30.0	1.0	29.7	15.0	0.5	14.9	48.0	2.0	48.1	20.0	1.0	20.2	63.0	2.5	63.0
K70-6-6	良	30.0	1.0	29.8	15.0	0.5	15.0	53.0	2.0	53.2	20.0	1.0	20.1	68.0	2.5	68.2
K70-6-6P	良	25.0	1.0	24.8	16.0	0.5	16.2	51.0	2.0	50.7	27.0	1.0	26.4	67.0	2.5	66.9
K70-10-10	良	18.0	0.5	18.1	9.0	0.5	9.3	58.0	2.0	57.7	22.0	1.0	22.1	67.0	2.5	67.0
K74-6-6L	良	30.0	1.0	31.0	6.0	0.5	6.4	59.0	2.0	59.4	20.0	1.0	19.7	65.0	2.5	65.8
K80-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.5	57.0	2.0	56.9	22.0	1.0	21.8	63.0	2.5	63.4
K80-6-6	良	30.0	1.0	29.1	15.0	0.5	15.0	63.0	2.5	64.1	20.0	1.0	19.8	78.0	2.5	79.1
K80-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	65.0	2.5	66.2	20.0	1.0	19.8	71.0	2.5	72.6
旧K80-10-6	良	20.0	1.0	20.3	8.0	0.5	8.2	69.0	2.5	68.9	10.0	0.5	9.5	77.0	2.5	77.1

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	31.0	16.0	0.5	15.6	62.0	2.5	62.8	30.0	1.0	30.2	78.0	2.5	78.4
K80-10-10	良	18.0	0.5	18.0	9.0	0.5	9.1	68.0	2.5	67.8	22.0	1.0	22.0	77.0	2.5	76.9
K85-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.5	64.0	2.5	63.9	22.0	1.0	21.9	70.0	2.5	70.4
旧K85-10-6	良	20.0	1.0	20.2	10.0	0.5	10.3	73.0	2.5	72.3	10.0	0.5	9.5	83.0	2.5	82.6
K85-10-6	良	30.0	1.0	30.0	16.0	0.5	16.0	67.0	2.5	67.5	30.0	1.0	30.3	83.0	2.5	83.5
K90-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.5	69.0	2.5	68.8	22.0	1.0	21.7	75.0	2.5	75.3
K90-4-4S	良	30.0	1.0	29.6	33.0	1.0	32.6	55.0	2.0	55.6	27.0	1.0	27.0	88.0	2.5	88.2
K90-6-4	良	30.0	1.0	29.9	15.0	0.5	14.6	70.0	2.5	70.4	23.0	1.0	23.2	85.0	2.5	85.0
K90-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.6	69.0	2.5	69.7	30.0	1.0	30.2	85.0	2.5	85.3
K90-10-6	良	20.0	1.0	19.3	15.0	0.5	15.5	70.0	2.5	70.9	23.0	1.0	23.4	85.0	2.5	86.4
K90-10-6L	良	30.0	1.0	29.2	15.0	0.5	15.2	70.0	2.5	70.7	23.0	1.0	23.3	85.0	2.5	85.9
K95-4-4S	良	30.0	1.0	29.7	33.0	1.0	32.4	60.0	2.5	59.5	27.0	1.0	26.6	93.0	3.0	91.9
K95-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.5	75.0	2.5	75.9	20.0	1.0	19.6	81.0	2.5	82.4
K95-6-6S	良	30.0	1.0	29.5	17.0	0.5	16.9	76.0	2.5	75.5	29.0	1.0	28.4	93.0	3.0	92.4
K95-10-6	良	30.0	1.0	29.6	20.0	1.0	20.1	70.0	2.5	70.5	23.0	1.0	22.4	90.0	3.0	90.6
K95-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.7	74.0	2.5	75.1	30.0	1.0	30.0	90.0	3.0	90.8
K95-10-10	良	30.0	1.0	30.4	20.0	1.0	20.3	70.0	2.5	69.5	25.0	1.0	24.5	90.0	3.0	89.8
K95-13-6	良	22.0	1.0	21.8	20.0	1.0	20.4	70.0	2.5	70.5	23.0	1.0	23.4	90.0	3.0	90.9
K95-13-6L	良	30.0	1.0	30.1	20.0	1.0	19.9	70.0	2.5	70.0	23.0	1.0	23.1	90.0	3.0	89.9
K95-13-13	良	30.0	1.0	30.0	18.0	0.5	18.5	72.0	2.5	71.5	23.0	1.0	23.0	90.0	3.0	90.0
K100-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.6	79.0	2.5	79.3	30.0	1.0	30.1	95.0	3.0	94.9
K100-10-6P	良	25.0	1.0	24.5	15.0	0.5	15.5	81.0	2.5	80.8	25.0	1.0	24.8	96.0	3.0	96.3
K100-10-10	良	30.0	1.0	29.8	19.0	0.5	18.5	76.0	2.5	76.2	24.0	1.0	23.6	95.0	3.0	94.7
K100-13-10	良	22.5	1.0	22.9	15.0	0.5	14.8	75.0	2.5	76.7	41.5	2.0	41.5	90.0	3.0	91.5
K100-13-13	良	22.0	1.0	21.5	15.0	0.5	15.5	80.0	2.5	79.8	23.0	1.0	22.4	95.0	3.0	95.3
K105-6-6H	良	25.0	1.0	24.8	17.0	0.5	16.6	83.0	2.5	82.6	26.0	1.0	26.5	100.0	3.0	99.2
K110-4-4S	良	30.0	1.0	29.7	43.0	2.0	43.2	65.0	2.5	65.0	27.0	1.0	26.8	108.0	3.0	108.2
K110-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	88.0	2.5	87.8	27.0	1.0	26.3	105.0	3.0	104.3
K110-10-6	良	30.0	1.0	29.6	20.0	1.0	19.5	85.0	2.5	84.8	23.0	1.0	22.6	105.0	3.0	104.3
K110-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.7	89.0	2.5	89.2	30.0	1.0	30.3	105.0	3.0	104.9
K110-10-10	良	30.0	1.0	30.1	20.0	1.0	19.5	82.0	2.5	81.9	24.0	1.0	24.2	102.0	3.0	101.4
K110-13-6	良	22.0	1.0	21.9	20.0	1.0	20.3	85.0	2.5	84.6	23.0	1.0	23.2	105.0	3.0	104.9
K110-13-6L	良	30.0	1.0	30.1	20.0	1.0	20.2	85.0	2.5	84.5	23.0	1.0	23.3	105.0	3.0	104.7
K110-13-13	良	30.0	1.0	30.0	20.0	1.0	19.8	84.0	2.5	83.8	23.0	1.0	23.2	104.0	3.0	103.6
K115-6-6H	良	25.0	1.0	24.5	17.0	0.5	16.6	93.0	3.0	93.3	27.0	1.0	26.4	110.0	3.0	109.9
K120-6-6H	良	25.0	1.0	24.5	17.0	0.5	16.5	98.0	3.0	98.3	27.0	1.0	26.3	115.0	3.0	114.8
K120-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.6	99.0	3.0	99.4	30.0	1.0	30.1	115.0	3.0	115.0
K120-10-10	良	30.0	1.0	30.7	20.0	1.0	20.1	95.0	3.0	94.9	24.0	1.0	24.4	115.0	3.0	115.0
K120-13-10	良	22.5	1.0	22.9	15.0	0.5	14.5	95.0	3.0	95.7	41.5	2.0	41.6	110.0	3.0	110.2
K120-13-13	良	30.0	1.0	30.4	20.0	1.0	20.1	95.0	3.0	95.0	23.0	1.0	23.2	115.0	3.0	115.1
K125-4-4S	良	30.0	1.0	29.6	48.0	2.0	47.5	75.0	2.5	75.5	27.0	1.0	26.8	123.0	3.0	123.0
K125-10-6	良	30.0	1.0	29.9	20.0	1.0	19.3	100.0	3.0	99.4	23.0	1.0	22.2	120.0	3.0	118.7
K125-13-6	良	22.0	1.0	22.0	20.0	1.0	20.1	100.0	3.0	99.5	23.0	1.0	23.2	120.0	3.0	119.6
K125-13-6L	良	30.0	1.0	30.0	20.0	1.0	19.9	100.0	3.0	99.4	23.0	1.0	23.3	120.0	3.0	119.3
K130-10-10	良	30.0	1.0	30.8	20.0	1.0	20.0	105.0	3.0	105.2	25.0	1.0	24.7	125.0	3.0	125.2
K130-13-10	良	22.5	1.0	22.7	15.0	0.5	14.8	105.0	3.0	105.8	41.5	2.0	41.7	120.0	3.0	120.6
K130-13-13	良	30.0	1.0	30.3	20.0	1.0	19.6	105.0	3.0	105.1	23.0	1.0	23.4	125.0	3.0	124.7
K135-10-6H	良	30.0	1.0	30.0	16.0	0.5	15.9	114.0	3.0	114.0	30.0	1.0	29.6	130.0	3.0	129.9
K145-10-6H	良	30.0	1.0	29.6	16.0	0.5	15.6	124.0	3.0	124.4	30.0	1.0	29.9	140.0	3.0	140.0
K150-10-10	良	30.0	1.0	30.5	20.0	1.0	20.2	125.0	3.0	123.8	25.0	1.0	24.4	145.0	3.0	144.0
K150-13-10	良	22.5	1.0	22.7	15.0	0.5	14.6	125.0	3.0	125.9	41.5	2.0	41.4	140.0	3.0	140.5
K150-13-13	良	30.0	1.0	30.4	20.0	1.0	20.5	125.0	3.0	123.7	23.0	1.0	23.3	145.0	3.0	144.2