

成形材料試験成績表

令和6年 12月度



株式会社 未来樹



〒181-0013 東京都三鷹市下連雀3-38-4

三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021


成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	964
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	4.8
引張降伏強さ	JIS K 7161	MPa	19.61 以上	28.04
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127


〔備考〕 本表は、材料メーカー報告および社内測定結果によるもので、当社製品の成形材料です。

K形スペーサ 試験成績書

令和 6年12月度



〒181-0013 東京都三鷹市下連雀 3-38-4
三鷹産業プラザ5F
TEL:0422-70-4201 FAX:0422-43-1021

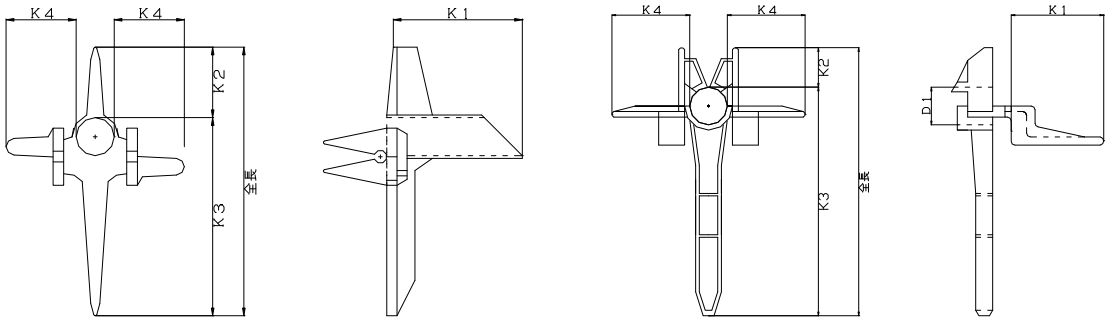

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.3	11.0	0.5	11.1	18.0	0.5	17.8	20.0	1.0	20.6	29.0	1.0	28.9
K30-3-3	良	30.0	1.0	29.9	11.0	0.5	11.0	18.0	0.5	17.9	20.0	1.0	20.7	29.0	1.0	28.9
旧K35-3-3	良	20.0	1.0	19.3	11.0	0.5	10.8	22.0	1.0	21.8	20.0	1.0	20.5	33.0	1.0	32.6
K35-3-3	良	30.0	1.0	29.8	11.0	0.5	11.0	22.0	1.0	21.9	20.0	1.0	20.6	33.0	1.0	32.9
旧K40-3-3	良	20.0	1.0	20.0	11.0	0.5	11.0	27.0	1.0	27.0	20.0	1.0	20.5	38.0	1.0	38.0
K40-3-3	良	30.0	1.0	30.0	11.0	0.5	11.4	27.0	1.0	27.0	20.0	1.0	20.6	38.0	1.0	38.4
K40-5-4	良	30.0	1.0	29.8	15.0	0.5	15.1	23.0	1.0	22.9	19.0	0.5	18.9	38.0	1.0	38.0
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	11.1	32.0	1.0	32.1	20.0	1.0	20.4	43.0	2.0	43.2
K45-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	32.0	1.0	32.4	20.0	1.0	20.6	43.0	2.0	43.7
K45-5-4	良	30.0	1.0	29.8	15.0	0.5	15.1	28.0	1.0	27.8	19.0	0.5	19.0	43.0	2.0	42.9
K45-6-4	良	30.0	1.0	29.8	15.0	0.5	15.4	29.0	1.0	29.0	20.0	1.0	20.1	44.0	2.0	44.4
旧K50-4-4	良	20.0	1.0	20.0	15.0	0.5	15.4	33.0	1.0	32.2	20.0	1.0	20.2	48.0	2.0	47.6
K50-4-4	良	30.0	1.0	29.8	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.4	48.0	2.0	47.7
K50-5-4	良	30.0	1.0	29.6	15.0	0.5	15.1	33.0	1.0	32.8	19.0	0.5	19.0	48.0	2.0	47.9
K50-6-4	良	30.0	1.0	29.8	15.0	0.5	15.3	33.0	1.0	33.2	20.0	1.0	20.0	48.0	2.0	48.5
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.9	35.0	1.0	35.9	17.0	0.5	16.7	47.0	2.0	47.8
旧K55-5-4	良	20.0	1.0	19.0	15.0	0.5	14.6	37.0	1.0	37.1	20.0	1.0	20.6	52.0	2.0	51.7
K55-5-4	良	30.0	1.0	30.0	15.0	0.5	15.0	37.0	1.0	37.6	20.0	1.0	20.5	52.0	2.0	52.6
K55-6-4	良	30.0	1.0	30.0	15.0	0.5	15.0	38.0	1.0	38.2	20.0	1.0	20.1	53.0	2.0	53.2
K60-6-4	良	30.0	1.0	29.9	15.0	0.5	15.1	43.0	2.0	43.2	20.0	1.0	20.1	58.0	2.0	58.3
K60-6-6JR	良	30.0	1.0	30.0	17.0	0.5	17.0	41.0	2.0	40.7	29.0	1.0	28.5	58.0	2.0	57.7
K60-6-6S	良	17.0	0.5	17.3	11.0	0.5	11.3	45.0	2.0	43.7	17.0	0.5	16.6	56.0	2.0	55.0
K65-6-4	良	30.0	1.0	29.9	15.0	0.5	15.3	48.0	2.0	48.4	20.0	1.0	20.1	63.0	2.5	63.7
K70-6-6	良	30.0	1.0	29.7	15.0	0.5	14.9	53.0	2.0	54.1	20.0	1.0	20.0	68.0	2.5	69.0
K70-6-6P	良	25.0	1.0	24.7	16.0	0.5	16.0	51.0	2.0	50.6	27.0	1.0	26.3	67.0	2.5	66.6
K70-10-10	良	18.0	0.5	18.0	9.0	0.5	9.2	58.0	2.0	57.7	22.0	1.0	22.0	67.0	2.5	66.9
K74-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.4	59.0	2.0	59.4	20.0	1.0	19.6	65.0	2.5	65.8
K80-4-4L	良	30.0	1.0	29.8	6.0	0.5	6.5	57.0	2.0	56.8	22.0	1.0	21.8	63.0	2.5	63.3
K80-6-6	良	30.0	1.0	29.1	15.0	0.5	15.0	63.0	2.5	64.1	20.0	1.0	19.7	78.0	2.5	79.1
K80-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.3	65.0	2.5	66.2	20.0	1.0	19.7	71.0	2.5	72.5
旧K80-10-6	良	20.0	1.0	20.2	8.0	0.5	8.2	69.0	2.5	68.9	10.0	0.5	9.5	77.0	2.5	77.1

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.9	16.0	0.5	15.5	62.0	2.5	62.8	30.0	1.0	30.2	78.0	2.5	78.3
K80-10-10	良	18.0	0.5	17.9	9.0	0.5	9.1	68.0	2.5	67.7	22.0	1.0	22.0	77.0	2.5	76.8
K85-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.5	64.0	2.5	63.9	22.0	1.0	21.9	70.0	2.5	70.4
旧K85-10-6	良	20.0	1.0	20.1	10.0	0.5	10.3	73.0	2.5	72.2	10.0	0.5	9.5	83.0	2.5	82.5
K85-10-6	良	30.0	1.0	30.0	16.0	0.5	16.0	67.0	2.5	67.9	30.0	1.0	30.3	83.0	2.5	83.9
K90-4-4L	良	30.0	1.0	29.9	6.0	0.5	6.5	69.0	2.5	68.7	22.0	1.0	21.7	75.0	2.5	75.2
K90-4-4S	良	30.0	1.0	29.6	33.0	1.0	32.6	55.0	2.0	55.5	27.0	1.0	26.9	88.0	2.5	88.1
K90-6-4	良	30.0	1.0	29.8	15.0	0.5	14.6	70.0	2.5	70.3	23.0	1.0	23.2	85.0	2.5	84.9
K90-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.5	69.0	2.5	69.7	30.0	1.0	30.2	85.0	2.5	85.2
K90-10-6	良	20.0	1.0	19.2	15.0	0.5	15.3	70.0	2.5	70.7	23.0	1.0	23.2	85.0	2.5	86.0
K90-10-6L	良	30.0	1.0	29.4	15.0	0.5	15.1	70.0	2.5	70.5	23.0	1.0	23.6	85.0	2.5	85.6
K95-4-4S	良	30.0	1.0	29.5	33.0	1.0	32.8	60.0	2.5	60.4	27.0	1.0	26.9	93.0	3.0	93.2
K95-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.4	75.0	2.5	75.8	20.0	1.0	19.8	81.0	2.5	82.2
K95-6-6S	良	30.0	1.0	29.2	17.0	0.5	16.7	76.0	2.5	75.8	29.0	1.0	28.3	93.0	3.0	92.5
K95-10-6	良	30.0	1.0	29.9	20.0	1.0	19.7	70.0	2.5	70.2	23.0	1.0	22.8	90.0	3.0	89.9
K95-10-6H	良	30.0	1.0	31.0	16.0	0.5	15.6	74.0	2.5	75.9	30.0	1.0	30.3	90.0	3.0	91.5
K95-10-10	良	30.0	1.0	30.1	20.0	1.0	19.9	70.0	2.5	69.9	25.0	1.0	24.3	90.0	3.0	89.8
K95-13-6	良	22.0	1.0	22.1	20.0	1.0	20.1	70.0	2.5	70.1	23.0	1.0	23.2	90.0	3.0	90.2
K95-13-6L	良	30.0	1.0	29.9	20.0	1.0	20.5	70.0	2.5	70.8	23.0	1.0	23.5	90.0	3.0	91.3
K95-13-13	良	30.0	1.0	30.5	18.0	0.5	18.5	72.0	2.5	71.1	23.0	1.0	23.2	90.0	3.0	89.6
K100-10-6H	良	30.0	1.0	31.0	16.0	0.5	15.8	79.0	2.5	79.0	30.0	1.0	30.0	95.0	3.0	94.8
K100-10-6P	良	25.0	1.0	24.9	15.0	0.5	15.5	81.0	2.5	80.4	25.0	1.0	24.5	96.0	3.0	95.9
K100-10-10	良	30.0	1.0	29.6	19.0	0.5	18.5	76.0	2.5	76.8	24.0	1.0	23.4	95.0	3.0	95.3
K100-13-10	良	22.5	1.0	22.6	15.0	0.5	14.6	75.0	2.5	76.3	41.5	2.0	41.7	90.0	3.0	90.9
K100-13-13	良	22.0	1.0	21.9	15.0	0.5	15.5	80.0	2.5	79.4	23.0	1.0	22.2	95.0	3.0	94.9
K105-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	83.0	2.5	83.1	26.0	1.0	26.3	100.0	3.0	99.7
K110-4-4S	良	30.0	1.0	29.5	43.0	2.0	42.8	65.0	2.5	64.4	27.0	1.0	26.6	108.0	3.0	107.2
K110-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.6	88.0	2.5	88.3	27.0	1.0	26.2	105.0	3.0	104.9
K110-10-6	良	30.0	1.0	29.9	20.0	1.0	20.1	85.0	2.5	85.4	23.0	1.0	22.3	105.0	3.0	105.5
K110-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.6	89.0	2.5	89.0	30.0	1.0	30.2	105.0	3.0	104.6
K110-10-10	良	30.0	1.0	30.7	20.0	1.0	20.3	82.0	2.5	81.6	24.0	1.0	24.1	102.0	3.0	101.9
K110-13-6	良	22.0	1.0	21.8	20.0	1.0	20.1	85.0	2.5	84.2	23.0	1.0	23.0	105.0	3.0	104.3
K110-13-6L	良	30.0	1.0	29.9	20.0	1.0	19.9	85.0	2.5	84.1	23.0	1.0	23.1	105.0	3.0	104.0
K110-13-13	良	30.0	1.0	30.6	20.0	1.0	20.1	84.0	2.5	83.7	23.0	1.0	23.1	104.0	3.0	103.8
K115-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	93.0	3.0	93.1	27.0	1.0	26.3	110.0	3.0	109.6
K120-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	98.0	3.0	98.0	27.0	1.0	26.2	115.0	3.0	114.5
K120-10-6H	良	30.0	1.0	30.6	16.0	0.5	15.6	99.0	3.0	99.2	30.0	1.0	30.0	115.0	3.0	114.8
K120-10-10	良	30.0	1.0	30.5	20.0	1.0	19.8	95.0	3.0	94.8	24.0	1.0	24.3	115.0	3.0	114.6
K120-13-10	良	22.5	1.0	22.8	15.0	0.5	14.5	95.0	3.0	95.6	41.5	2.0	41.6	110.0	3.0	110.1
K120-13-13	良	30.0	1.0	30.4	20.0	1.0	20.1	95.0	3.0	96.0	23.0	1.0	23.2	115.0	3.0	116.1
K125-4-4S	良	30.0	1.0	29.6	48.0	2.0	47.5	75.0	2.5	75.4	27.0	1.0	26.8	123.0	3.0	122.9
K125-10-6	良	30.0	1.0	29.9	20.0	1.0	19.2	100.0	3.0	99.3	23.0	1.0	22.9	120.0	3.0	118.5
K125-13-6	良	22.0	1.0	22.0	20.0	1.0	20.0	100.0	3.0	99.4	23.0	1.0	23.2	120.0	3.0	119.4
K125-13-6L	良	30.0	1.0	30.0	20.0	1.0	19.8	100.0	3.0	99.3	23.0	1.0	23.2	120.0	3.0	119.1
K130-10-10	良	30.0	1.0	30.7	20.0	1.0	19.9	105.0	3.0	105.1	25.0	1.0	24.6	125.0	3.0	125.0
K130-13-10	良	22.5	1.0	22.6	15.0	0.5	14.8	105.0	3.0	105.7	41.5	2.0	41.7	120.0	3.0	120.5
K130-13-13	良	30.0	1.0	30.2	20.0	1.0	19.5	105.0	3.0	106.0	23.0	1.0	23.3	125.0	3.0	125.5
K135-10-6H	良	30.0	1.0	29.9	16.0	0.5	15.9	114.0	3.0	113.9	30.0	1.0	29.6	130.0	3.0	129.8
K145-10-6H	良	30.0	1.0	30.2	16.0	0.5	16.0	124.0	3.0	123.9	30.0	1.0	29.7	140.0	3.0	139.9
K150-10-10	良	30.0	1.0	30.2	20.0	1.0	19.8	125.0	3.0	124.8	25.0	1.0	24.2	145.0	3.0	144.6
K150-13-10	良	22.5	1.0	22.4	15.0	0.5	14.9	125.0	3.0	125.2	41.5	2.0	41.6	140.0	3.0	140.1
K150-13-13	良	30.0	1.0	30.1	20.0	1.0	20.1	125.0	3.0	124.7	23.0	1.0	23.1	145.0	3.0	144.8