

成形材料試験成績表

令和7年 3月度



株式会社 未来樹脂



〒181-0013 東京都三鷹市下連雀3-38-4

三鷹産業プラザ5F

TEL:0422-70-4201 FAX:0422-43-1021


成形材料名: ポリエチレン

試験項目	試験方法	単位	規格値	試験値
密度	JIS K 7112	kg/m ³	942 以上	962
メルトフローレート	JIS K 7210	g/10min	1.5 以上 6.0 未満	4.9
引張降伏強さ	JIS K 7161	MPa	19.61 以上	28.04
デュロメータD硬さ	JIS K 7215	H _D D	60 以上	64
ビカッ軟化点	JIS K 7206	°C	105 以上	127


〔備考〕 本表は、材料メーカー報告および社内測定結果によるもので、当社製品の成形材料です。

K形スペーサ 試験成績書

令和 7年 3月 度



〒181-0013 東京都三鷹市下連雀 3-38-4
三鷹産業プラザ5F
TEL:0422-70-4201 FAX:0422-43-1021

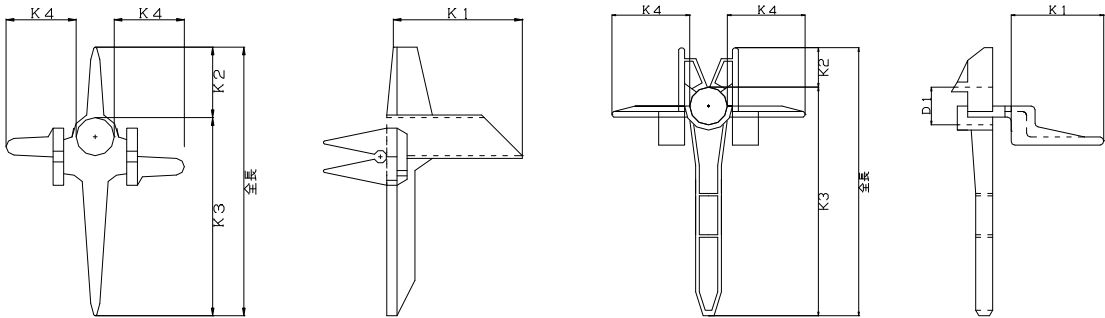

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
旧K30-3-3	良	20.0	1.0	19.1	11.0	0.5	11.1	18.0	0.5	17.7	20.0	1.0	20.6	29.0	1.0	28.8
K30-3-3	良	30.0	1.0	30.0	11.0	0.5	11.1	18.0	0.5	17.9	20.0	1.0	20.8	29.0	1.0	29.0
旧K35-3-3	良	20.0	1.0	19.4	11.0	0.5	11.0	22.0	1.0	22.0	20.0	1.0	20.7	33.0	1.0	33.0
K35-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	22.0	1.0	22.1	20.0	1.0	20.6	33.0	1.0	33.4
旧K40-3-3	良	20.0	1.0	19.9	11.0	0.5	11.2	27.0	1.0	27.1	20.0	1.0	20.6	38.0	1.0	38.3
K40-3-3	良	30.0	1.0	29.9	11.0	0.5	11.2	27.0	1.0	27.1	20.0	1.0	20.5	38.0	1.0	38.3
K40-5-4	良	30.0	1.0	29.5	15.0	0.5	15.1	23.0	1.0	23.0	19.0	0.5	18.9	38.0	1.0	38.1
旧K45-3-3	良	20.0	1.0	19.9	11.0	0.5	10.9	32.0	1.0	32.2	20.0	1.0	20.5	43.0	2.0	43.1
K45-3-3	良	30.0	1.0	30.0	11.0	0.5	11.3	32.0	1.0	32.3	20.0	1.0	20.6	43.0	2.0	43.6
K45-5-4	良	30.0	1.0	30.1	15.0	0.5	15.3	28.0	1.0	27.8	19.0	0.5	19.3	43.0	2.0	43.1
K45-6-4	良	30.0	1.0	29.9	15.0	0.5	14.9	29.0	1.0	29.3	20.0	1.0	20.3	44.0	2.0	44.2
旧K50-4-4	良	20.0	1.0	20.1	15.0	0.5	15.4	33.0	1.0	32.3	20.0	1.0	20.2	48.0	2.0	47.7
K50-4-4	良	30.0	1.0	29.8	15.0	0.5	15.5	33.0	1.0	32.4	20.0	1.0	20.2	48.0	2.0	47.9
K50-5-4	良	30.0	1.0	30.2	15.0	0.5	15.2	33.0	1.0	32.5	19.0	0.5	18.9	48.0	2.0	47.7
K50-6-4	良	30.0	1.0	30.1	15.0	0.5	15.4	33.0	1.0	33.4	20.0	1.0	20.2	48.0	2.0	48.8
K50-6-6S	良	16.0	0.5	15.5	12.0	0.5	11.8	35.0	1.0	35.9	17.0	0.5	16.6	47.0	2.0	47.7
旧K55-5-4	良	20.0	1.0	19.1	15.0	0.5	14.7	37.0	1.0	37.1	20.0	1.0	20.7	52.0	2.0	51.8
K55-5-4	良	30.0	1.0	29.7	15.0	0.5	15.2	37.0	1.0	37.5	20.0	1.0	20.7	52.0	2.0	52.7
K55-6-4	良	30.0	1.0	29.7	15.0	0.5	14.9	38.0	1.0	38.2	20.0	1.0	20.0	53.0	2.0	53.1
K60-6-4	良	30.0	1.0	29.9	15.0	0.5	15.2	43.0	2.0	43.2	20.0	1.0	20.2	58.0	2.0	58.4
K60-6-6JR	良	30.0	1.0	30.1	17.0	0.5	17.2	41.0	2.0	40.6	29.0	1.0	28.3	58.0	2.0	57.8
K60-6-6S	良	17.0	0.5	17.3	11.0	0.5	11.3	45.0	2.0	43.8	17.0	0.5	16.6	56.0	2.0	55.1
K65-6-4	良	30.0	1.0	29.9	15.0	0.5	15.0	48.0	2.0	48.1	20.0	1.0	20.2	63.0	2.5	63.1
K70-6-6	良	30.0	1.0	29.9	15.0	0.5	14.9	53.0	2.0	53.3	20.0	1.0	19.8	68.0	2.5	68.2
K70-6-6P	良	25.0	1.0	24.5	16.0	0.5	16.1	51.0	2.0	50.6	27.0	1.0	26.8	67.0	2.5	66.7
K70-10-10	良	18.0	0.5	18.0	9.0	0.5	9.3	58.0	2.0	57.6	22.0	1.0	22.2	67.0	2.5	66.9
K74-6-6L	良	30.0	1.0	30.9	6.0	0.5	6.5	59.0	2.0	59.2	20.0	1.0	19.5	65.0	2.5	65.7
K80-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.4	57.0	2.0	56.5	22.0	1.0	21.8	63.0	2.5	62.9
K80-6-6	良	30.0	1.0	29.0	15.0	0.5	14.7	63.0	2.5	64.2	20.0	1.0	19.9	78.0	2.5	78.9
K80-6-6L	良	30.0	1.0	30.8	6.0	0.5	6.3	65.0	2.5	66.0	20.0	1.0	19.6	71.0	2.5	72.3
旧K80-10-6	良	20.0	1.0	19.9	8.0	0.5	8.2	69.0	2.5	68.9	10.0	0.5	9.5	77.0	2.5	77.1

項目 種類	外 観 形 状	K1			K2			K3			K4			全長		
		寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値	寸 法	許 容 差	測 定 値
		mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm	mm	±	mm
K80-10-6	良	30.0	1.0	30.5	16.0	0.5	15.7	62.0	2.5	62.8	30.0	1.0	29.9	78.0	2.5	78.5
K80-10-10	良	18.0	0.5	18.0	9.0	0.5	9.0	68.0	2.5	67.7	22.0	1.0	22.2	77.0	2.5	76.7
K85-4-4L	良	30.0	1.0	30.0	6.0	0.5	6.4	64.0	2.5	63.6	22.0	1.0	22.0	70.0	2.5	70.0
旧K85-10-6	良	20.0	1.0	20.0	10.0	0.5	10.2	73.0	2.5	72.8	10.0	0.5	9.5	83.0	2.5	83.0
K85-10-6	良	30.0	1.0	29.9	16.0	0.5	16.0	67.0	2.5	67.8	30.0	1.0	30.3	83.0	2.5	83.8
K90-4-4L	良	30.0	1.0	30.2	6.0	0.5	6.4	69.0	2.5	69.1	22.0	1.0	21.8	75.0	2.5	75.5
K90-4-4S	良	30.0	1.0	29.9	33.0	1.0	32.3	55.0	2.0	55.8	27.0	1.0	26.8	88.0	2.5	88.1
K90-6-4	良	30.0	1.0	30.3	15.0	0.5	14.6	70.0	2.5	70.4	23.0	1.0	23.4	85.0	2.5	85.0
K90-10-6H	良	30.0	1.0	30.9	16.0	0.5	15.7	69.0	2.5	69.6	30.0	1.0	30.1	85.0	2.5	85.3
K90-10-6	良	20.0	1.0	19.3	15.0	0.5	15.2	70.0	2.5	70.7	23.0	1.0	23.2	85.0	2.5	85.9
K90-10-6L	良	30.0	1.0	29.1	15.0	0.5	15.2	70.0	2.5	70.9	23.0	1.0	23.1	85.0	2.5	86.1
K95-4-4S	良	30.0	1.0	29.8	33.0	1.0	32.3	60.0	2.5	59.6	27.0	1.0	26.6	93.0	3.0	91.9
K95-6-6L	良	30.0	1.0	31.0	6.0	0.5	6.4	75.0	2.5	75.8	20.0	1.0	19.7	81.0	2.5	82.2
K95-6-6S	良	30.0	1.0	29.5	17.0	0.5	17.2	76.0	2.5	75.8	29.0	1.0	28.3	93.0	3.0	93.0
K95-10-6	良	30.0	1.0	30.0	20.0	1.0	19.2	70.0	2.5	70.2	23.0	1.0	22.5	90.0	3.0	89.4
K95-10-6H	良	30.0	1.0	30.9	16.0	0.5	15.5	74.0	2.5	75.9	30.0	1.0	30.2	90.0	3.0	91.4
K95-10-10	良	30.0	1.0	30.0	20.0	1.0	20.1	70.0	2.5	69.7	25.0	1.0	24.3	90.0	3.0	89.8
K95-13-6	良	22.0	1.0	22.1	20.0	1.0	19.6	70.0	2.5	71.0	23.0	1.0	23.4	90.0	3.0	90.6
K95-13-6L	良	30.0	1.0	29.9	20.0	1.0	20.4	70.0	2.5	70.1	23.0	1.0	23.5	90.0	3.0	90.5
K95-13-13	良	30.0	1.0	30.2	18.0	0.5	18.5	72.0	2.5	71.5	23.0	1.0	23.0	90.0	3.0	90.0
K100-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.6	79.0	2.5	79.1	30.0	1.0	30.1	95.0	3.0	94.7
K100-10-6P	良	25.0	1.0	25.1	15.0	0.5	15.5	81.0	2.5	80.6	25.0	1.0	24.6	96.0	3.0	96.1
K100-10-10	良	30.0	1.0	29.8	19.0	0.5	18.5	76.0	2.5	76.9	24.0	1.0	23.6	95.0	3.0	95.4
K100-13-10	良	22.5	1.0	22.6	15.0	0.5	14.6	75.0	2.5	76.4	41.5	2.0	41.6	90.0	3.0	91.0
K100-13-13	良	22.0	1.0	21.9	15.0	0.5	15.5	80.0	2.5	79.2	23.0	1.0	22.4	95.0	3.0	94.7
K105-6-6H	良	25.0	1.0	24.6	17.0	0.5	16.5	83.0	2.5	82.9	26.0	1.0	26.5	100.0	3.0	99.4
K110-4-4S	良	30.0	1.0	29.4	43.0	2.0	42.7	65.0	2.5	65.2	27.0	1.0	26.5	108.0	3.0	107.9
K110-6-6H	良	25.0	1.0	24.5	17.0	0.5	16.5	88.0	2.5	87.9	27.0	1.0	26.3	105.0	3.0	104.4
K110-10-6	良	30.0	1.0	29.7	20.0	1.0	19.9	85.0	2.5	85.5	23.0	1.0	22.8	105.0	3.0	105.4
K110-10-6H	良	30.0	1.0	30.7	16.0	0.5	15.6	89.0	2.5	89.0	30.0	1.0	30.2	105.0	3.0	104.6
K110-10-10	良	30.0	1.0	30.1	20.0	1.0	19.7	82.0	2.5	81.6	24.0	1.0	24.2	102.0	3.0	101.3
K110-13-6	良	22.0	1.0	21.8	20.0	1.0	19.9	85.0	2.5	85.3	23.0	1.0	23.4	105.0	3.0	105.2
K110-13-6L	良	30.0	1.0	29.9	20.0	1.0	20.1	85.0	2.5	85.2	23.0	1.0	23.1	105.0	3.0	105.3
K110-13-13	良	30.0	1.0	30.6	20.0	1.0	19.9	84.0	2.5	83.9	23.0	1.0	23.0	104.0	3.0	103.8
K115-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	93.0	3.0	92.8	27.0	1.0	26.3	110.0	3.0	109.3
K120-6-6H	良	25.0	1.0	24.7	17.0	0.5	16.5	98.0	3.0	98.1	27.0	1.0	26.3	115.0	3.0	114.6
K120-10-6H	良	30.0	1.0	30.8	16.0	0.5	15.7	99.0	3.0	99.3	30.0	1.0	30.3	115.0	3.0	115.0
K120-10-10	良	30.0	1.0	30.1	20.0	1.0	20.0	95.0	3.0	94.8	24.0	1.0	24.3	115.0	3.0	114.8
K120-13-10	良	22.5	1.0	22.9	15.0	0.5	14.6	95.0	3.0	95.4	41.5	2.0	41.6	110.0	3.0	110.0
K120-13-13	良	30.0	1.0	30.4	20.0	1.0	19.8	95.0	3.0	95.5	23.0	1.0	23.5	115.0	3.0	115.3
K125-4-4S	良	30.0	1.0	29.4	48.0	2.0	47.4	75.0	2.5	74.7	27.0	1.0	26.7	123.0	3.0	122.1
K125-10-6	良	30.0	1.0	29.8	20.0	1.0	19.6	100.0	3.0	99.7	23.0	1.0	22.3	120.0	3.0	119.3
K125-13-6	良	22.0	1.0	21.9	20.0	1.0	19.9	100.0	3.0	99.7	23.0	1.0	23.1	120.0	3.0	119.6
K125-13-6L	良	30.0	1.0	29.8	20.0	1.0	20.1	100.0	3.0	99.2	23.0	1.0	23.2	120.0	3.0	119.3
K130-10-10	良	30.0	1.0	30.3	20.0	1.0	20.5	105.0	3.0	105.2	25.0	1.0	24.3	125.0	3.0	125.7
K130-13-10	良	22.5	1.0	22.2	15.0	0.5	14.8	105.0	3.0	105.8	41.5	2.0	41.7	120.0	3.0	120.6
K130-13-13	良	30.0	1.0	30.3	20.0	1.0	19.9	105.0	3.0	105.8	23.0	1.0	23.5	125.0	3.0	125.7
K135-10-6H	良	30.0	1.0	30.1	16.0	0.5	15.8	114.0	3.0	113.6	30.0	1.0	29.5	130.0	3.0	129.4
K145-10-6H	良	30.0	1.0	30.4	16.0	0.5	15.5	124.0	3.0	123.5	30.0	1.0	29.9	140.0	3.0	139.0
K150-10-10	良	30.0	1.0	30.1	20.0	1.0	20.4	125.0	3.0	124.0	25.0	1.0	24.6	145.0	3.0	144.4
K150-13-10	良	22.5	1.0	22.9	15.0	0.5	14.8	125.0	3.0	126.1	41.5	2.0	41.5	140.0	3.0	140.9
K150-13-13	良	30.0	1.0	30.7	20.0	1.0	20.3	125.0	3.0	123.8	23.0	1.0	23.3	145.0	3.0	144.1